
lambert&fils


LAURENT 08




type	suspension	suspension					
materials	sphere: frame:	handblown opaline glass polished brass or powder coated aluminum					
	hardware:	or nickel plated steel polished brass or powder coated aluminium					
	wire:	nylon					
weight	14 lb / 6 kg	14 lb / 6 kg					
light bulb	1	LED (included), 4,5W (see lightbulb section for specifications)					
sockets	G9						
voltage	120V / 240V	120V / 240V					
dimmer	refer to our reco	refer to our recommended list of dimmer models					
certifications	с∰из С €≟						
notes	 additional charge orders 	 must be installed by an electrician additional charges for modifications or for special orders lead time between 8 to 9 weeks 					

- lead time between 8 to 9 weeks.
- dimensions are approximate and may vary slightly.

parallel wires






parallel wires with offset connection

angled wires


4'-0" 152 cm

incl.



lambert&fils

ORDER GUIDE: SKU

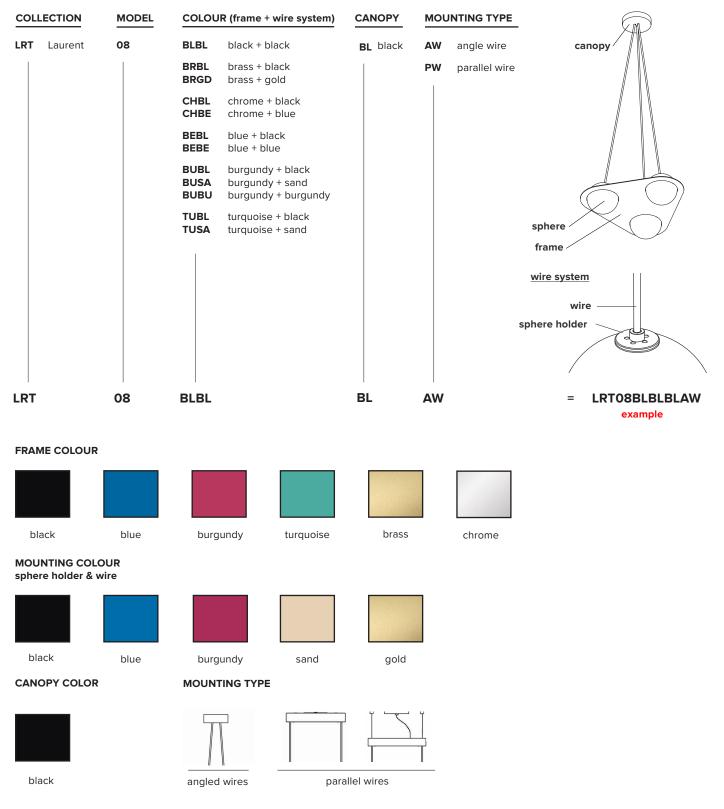


Updated: December 2017

lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS

+ 🗖 +



Frosted 4.5W 100V-120V / 240V 450 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommand conducting your own test before final installation.