





# HUTCHISON



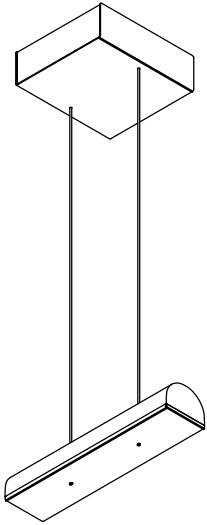

- To be installed by an electrician to an electrical box
- LED may only be changed by Lambert & Fils or other authorized personnel
- Use appropriate screws where necessary
- Use appropriate anchors and ensure your electrical box can hold the weight of the luminaire.
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site




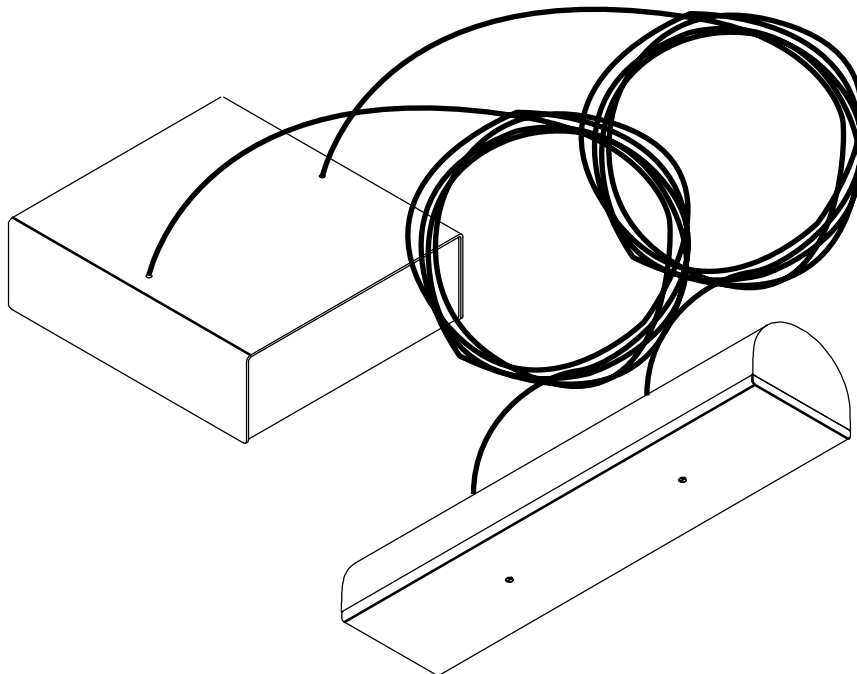


## PLEASE NOTE

**THIS IS AN EXAMPLE OF THE HUTCHISON 01.  
HOWEVER, THE 02, 03 AND 04 FOLLOW  
THE SAME INSTALLATION PROCESS.**


Hutchison 01




Hutchison 02



Hutchison 03



Hutchison 04




# OPEN CANOPY

STEPS 1-3


1

Pull down canopy cover it is held in place by a magnet. Gently rest it on top of the luminaire.

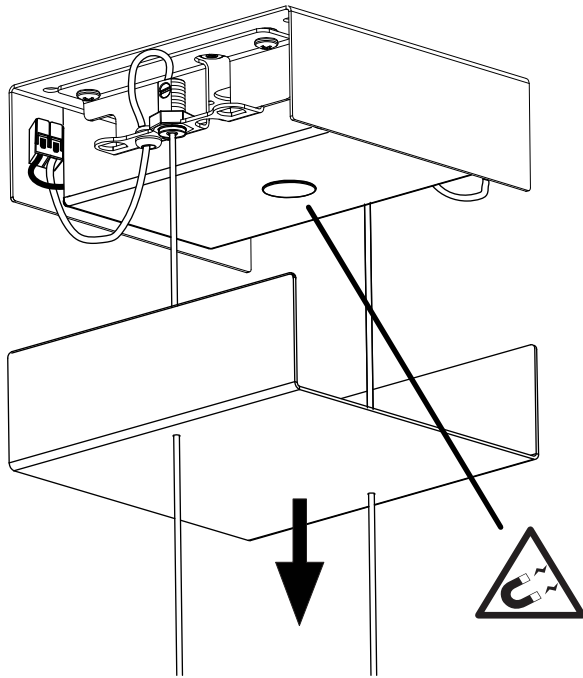


2

Disconnect all wires of the luminaire from the wago's.

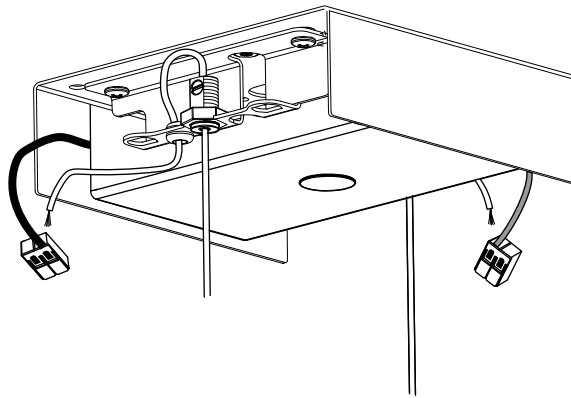

3

Unscrew both screws of the driver housing and set it aside.



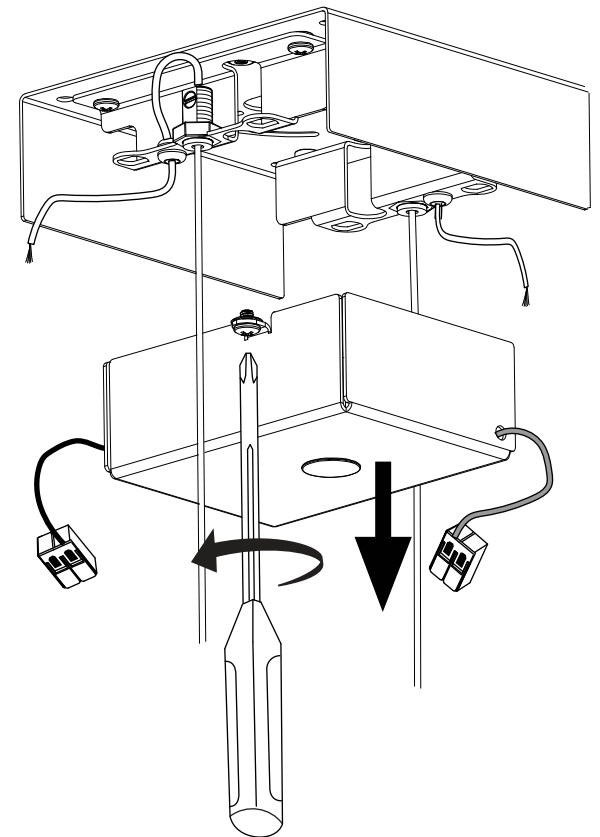


# INSTALL EXTENSION CORD

STEPS 4-5



4

Connect the extension cord to the electrical box wires

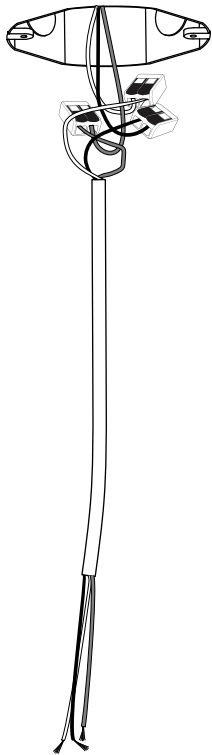

5



Pass the extension cord through center hole of canopy.

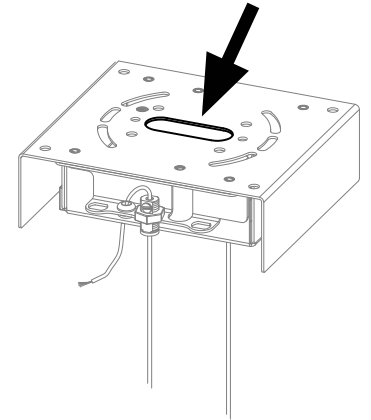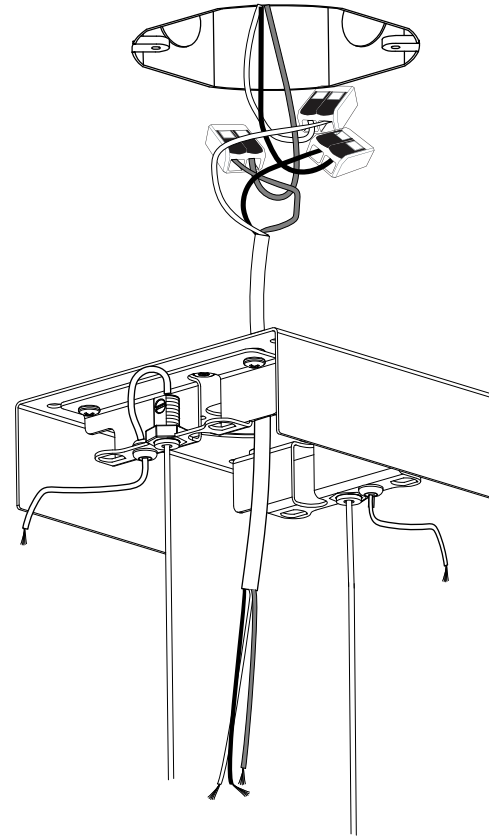

# MOUNT CANOPY BRACKET


6

The luminaire can either be mounted to the junction box or directly to the ceiling using appropriate holes.

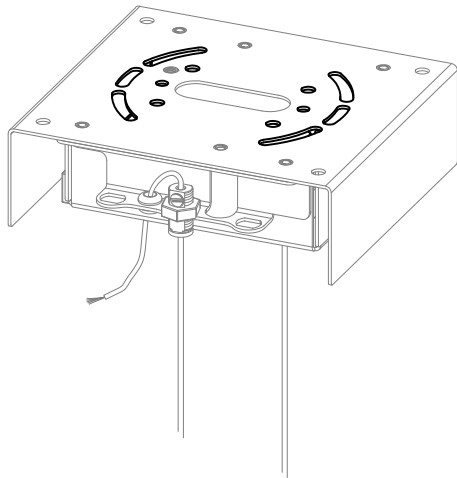



To junction box

OR

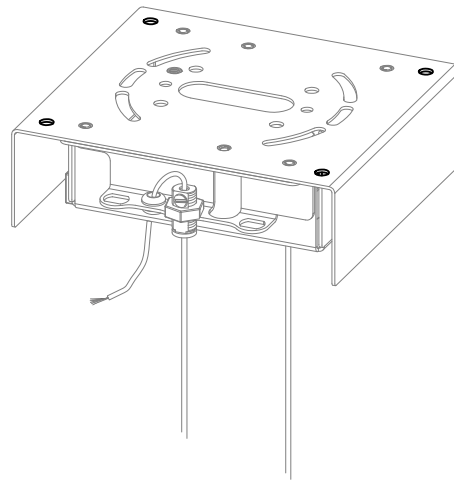

directly to the ceiling  
\*use appropriate anchors

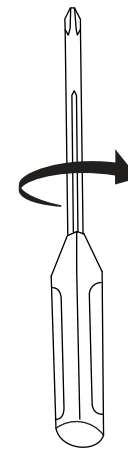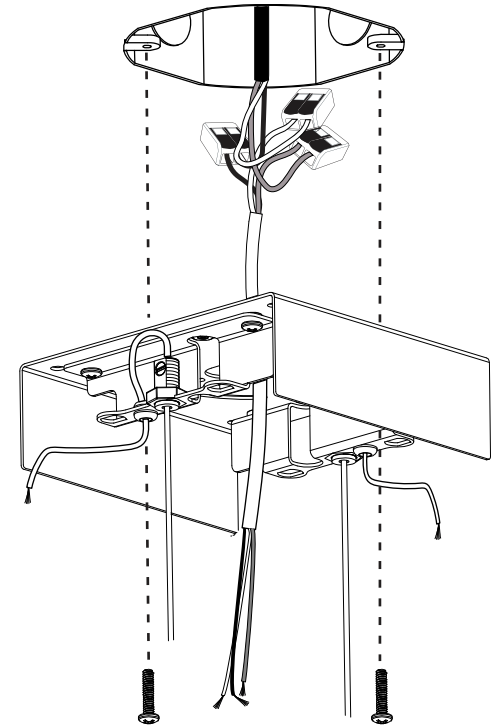




Ensure no wires are damaged during these steps.

# MAKE HIGH VOLTAGE CONNECTIONS

STEPS 7-8


7

Connect the extension cord to AC input wires of the driver and the ground to the bracket.

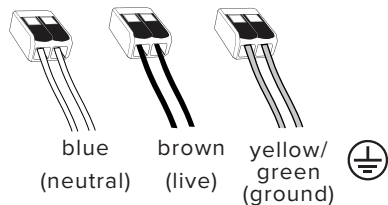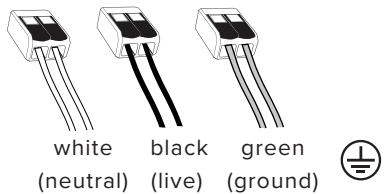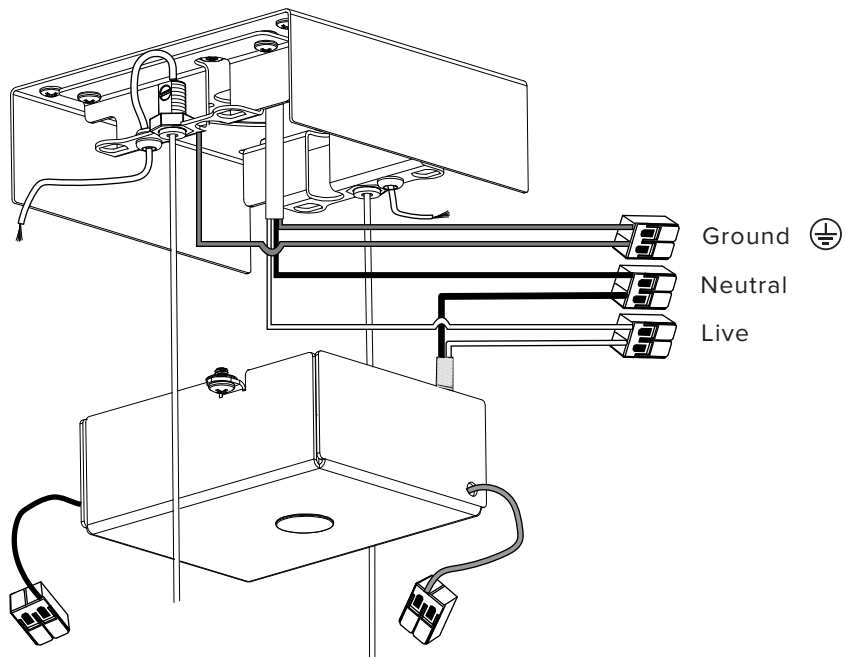

8

Replace the driver housing.

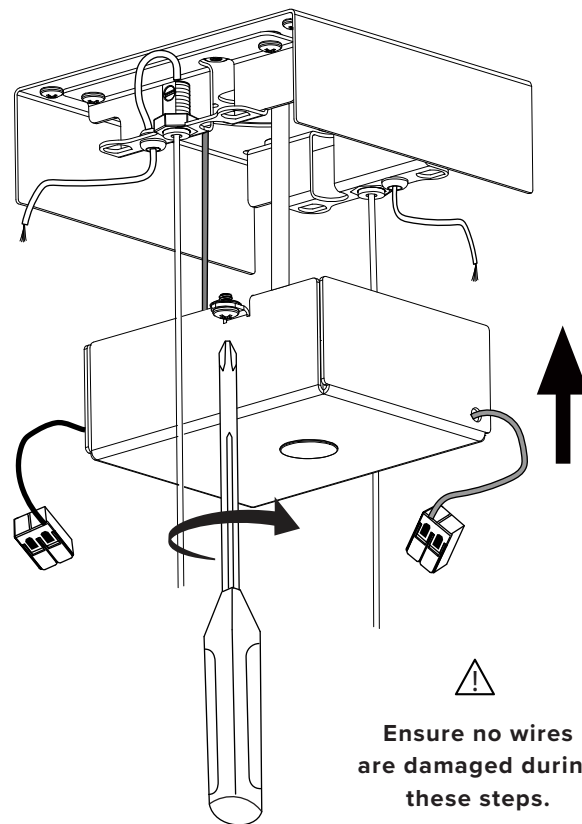




If applicable, use grey and purple wires for 0-10V dimming circuit before closing the driver housing.

# ADJUST LUMINAIRE WIRE LENGTH

STEPS 9-11

9


Measure your final wire length (X).

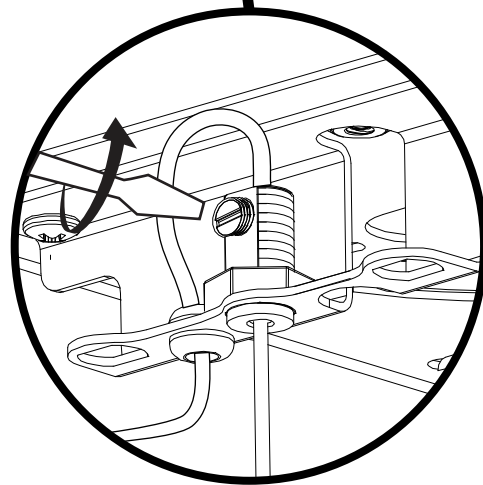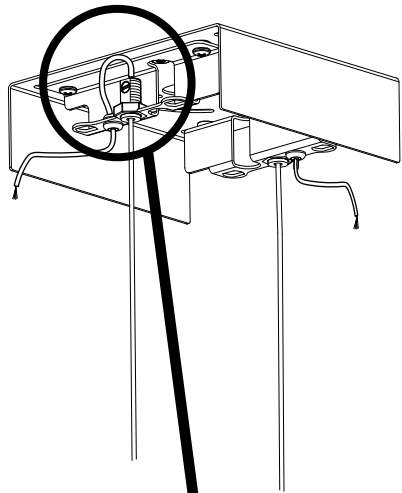

Loosen nylon set screw in the strain relief.

10

Pull wires through strain relief to achieve desired length, leaving a minimum of 10" (254mm) of wire after the strain relief.

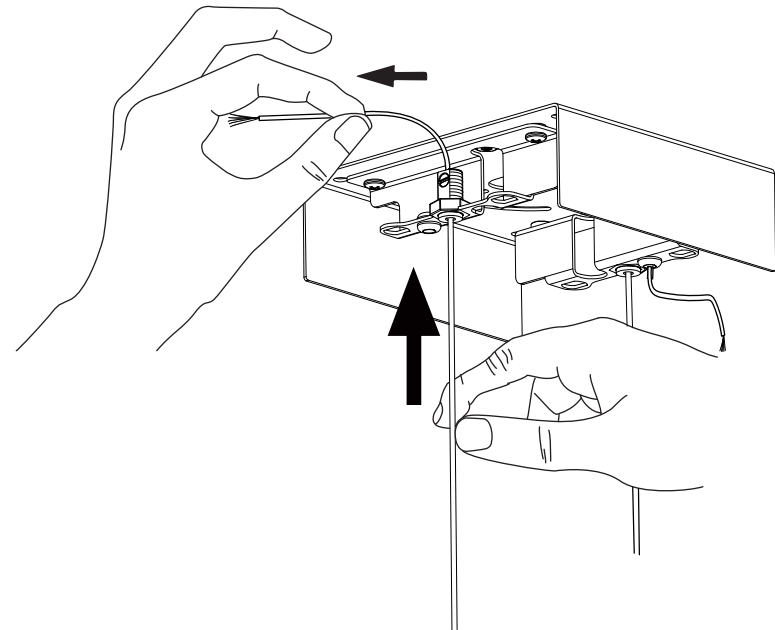


## RECONNECT LOW VOLTAGE WIRES

11

Retighten nylon set screw in the strain relief when desired length is achieved.

**MICRO ADJUSTMENTS  
CAN BE MADE LATER.**

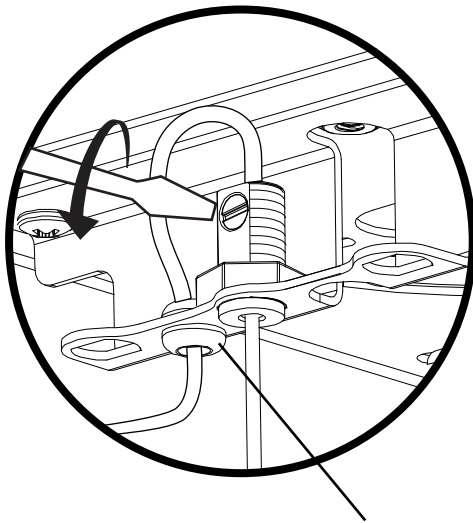

Be sure to feed wire back through grommet when finished.

12


Reconnect low voltage wires on both sides of the housing as before. One side is marked positive, the other is marked negative.

**FOR WHITE  
WIRE LUMINAIRE**

Red to grey  
Black to black

**FOR BLACK  
WIRE LUMINAIRE**

Red to red  
Black to black

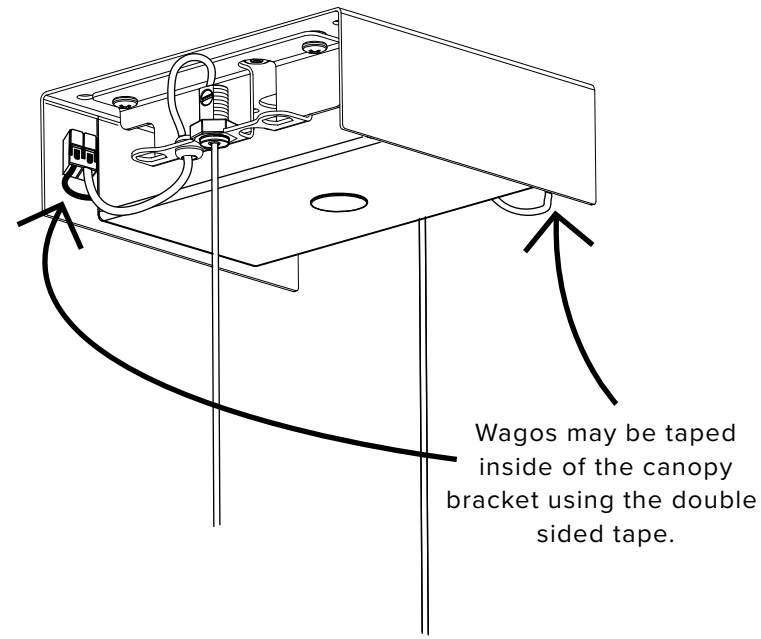


Wagos may be taped inside of the canopy bracket using the double sided tape.

## MAKE MICRO ADJUSTMENTS

13

To level the luminaire, push the strain relief, then turn the brass nut to make any necessary adjustments.

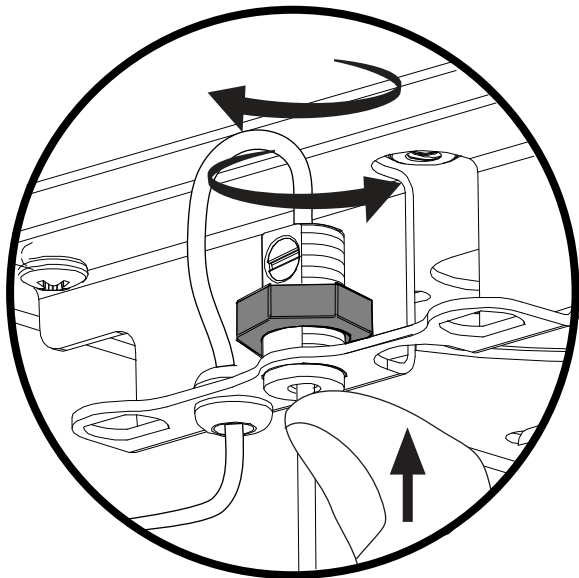


On the Hut 03 and Hut 04 versions adjust the four corner wires before the central wires



The brass nut must never exceed the top of the strain relief.

14

Replace canopy cover. It is held in place by a magnet.

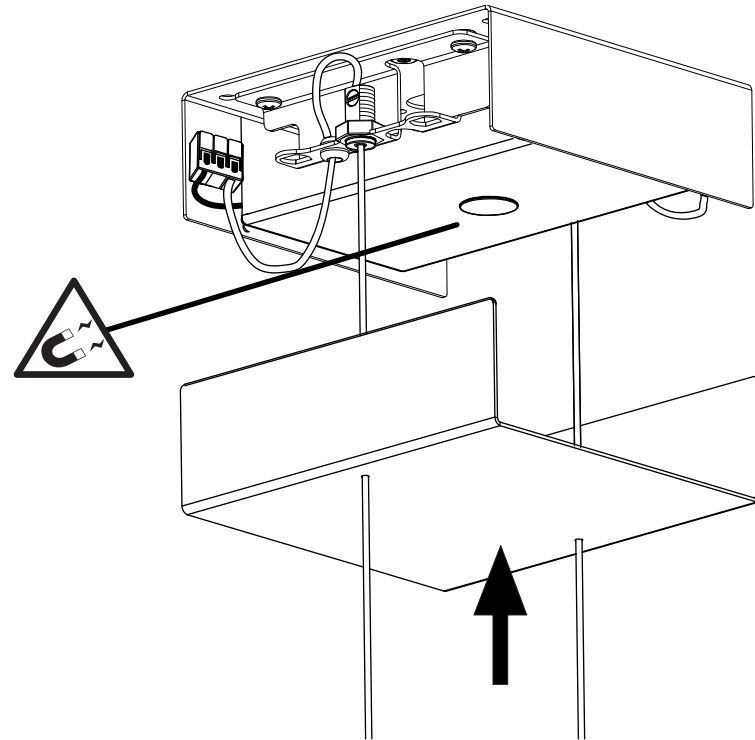

Ensure no wires are damaged during these steps.