


## MILE 01, 02, 03



- To be installed by an electrician to an electrical box
- Use appropriate screws and anchors where necessary
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site
- Should be used exclusively as a lamp and not as a shelving, display or hanging unit

lamp weights **4-9 lbs.**

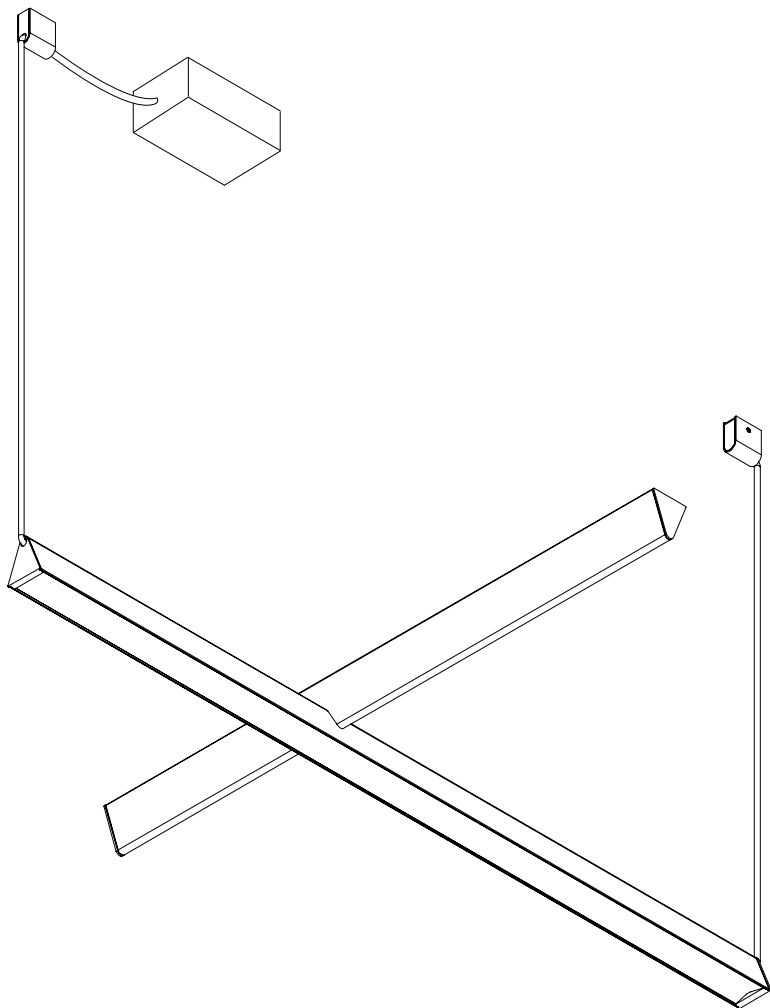

### PLEASE NOTE



THIS IS AN EXAMPLE OF THE MILE 01.  
HOWEVER, THE MILE 02 AND 03 FOLLOW  
THE SAME INSTALLATION PROCESS.

1


Remove endcap on short side of uplight.

It is held in place with a magnet.

Pull tape up to remove lens  
then **remove tape**.

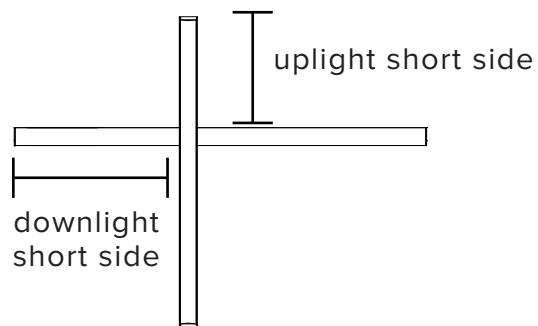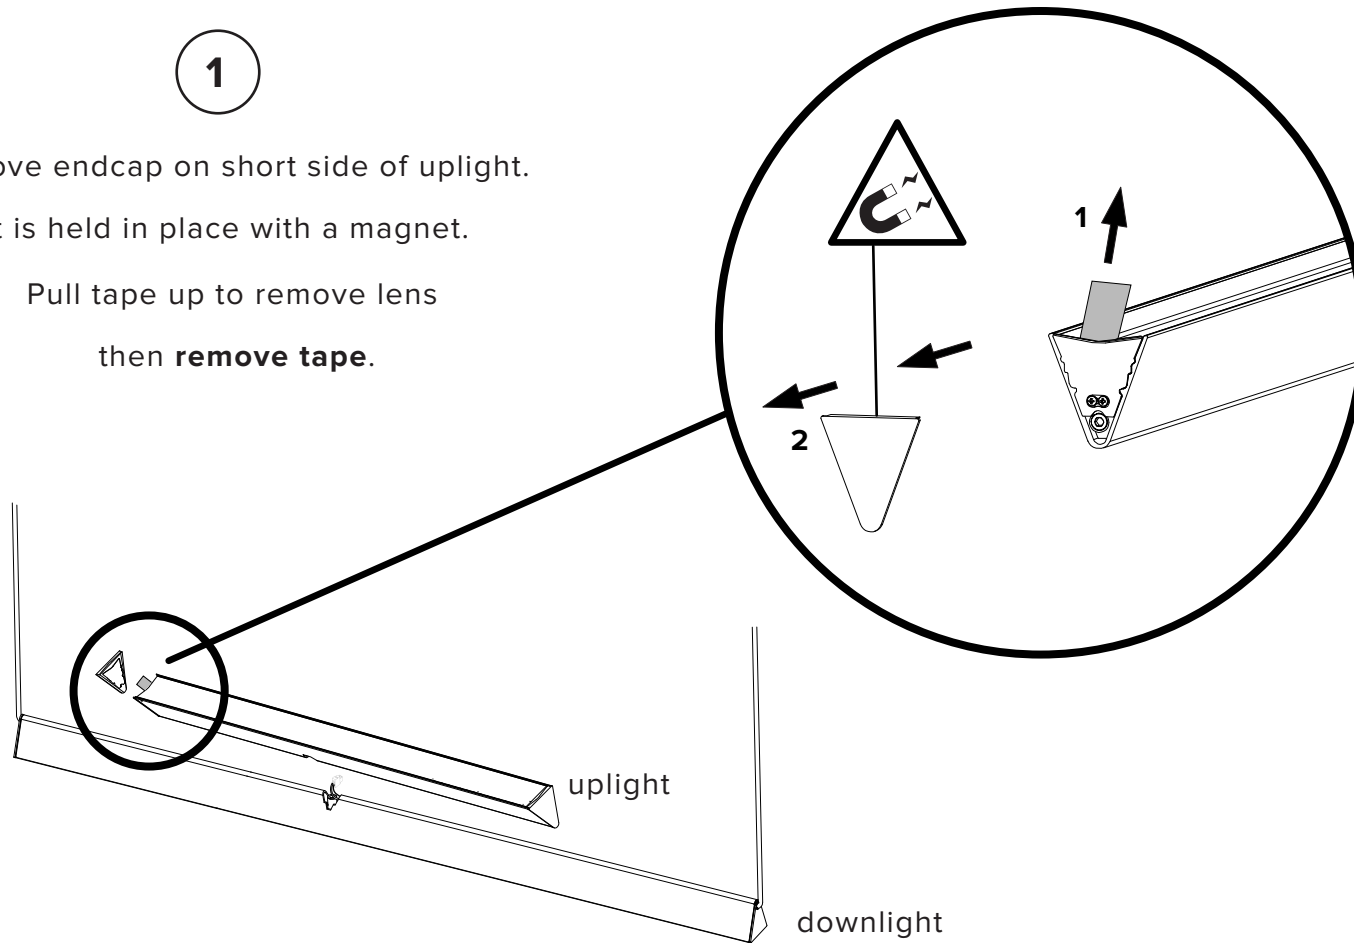


**Becareful when removing endcap that  
it does not stick to other surfaces which  
could result in scratches in the paint.**

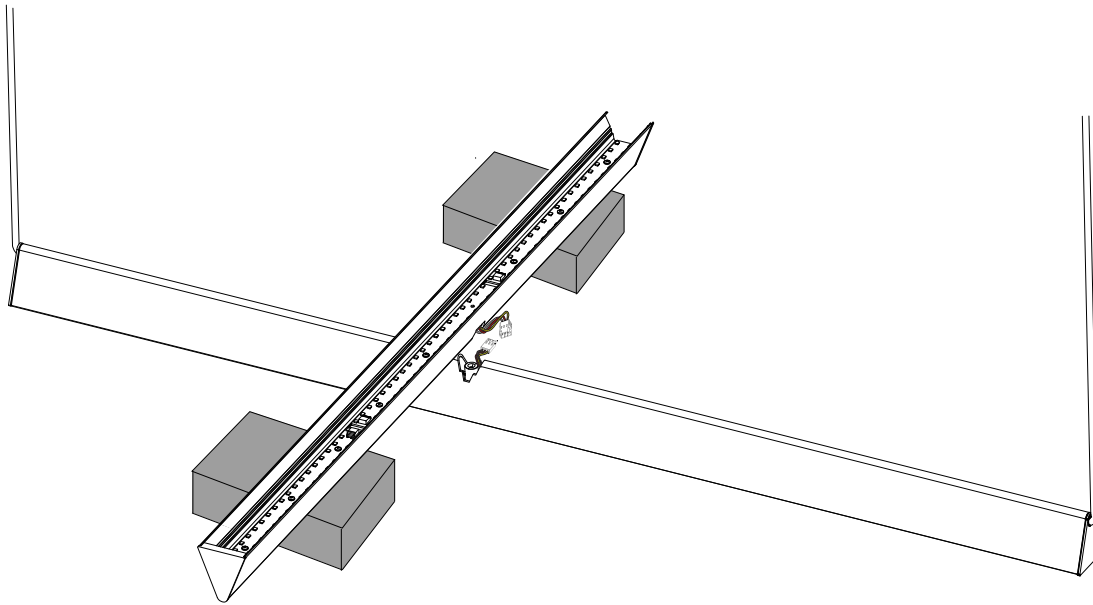


2

Before connecting the two sections of your luminaire, rest the uplight on the foam in which it was shipped.

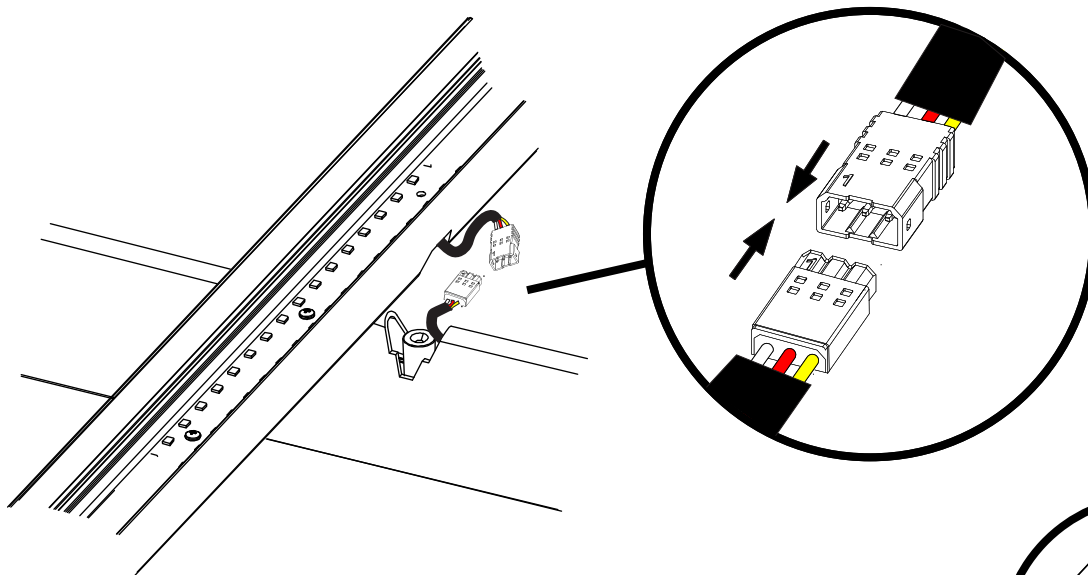


3

Make the connection between the two sections. Then carefully push them back into the uplight long side.

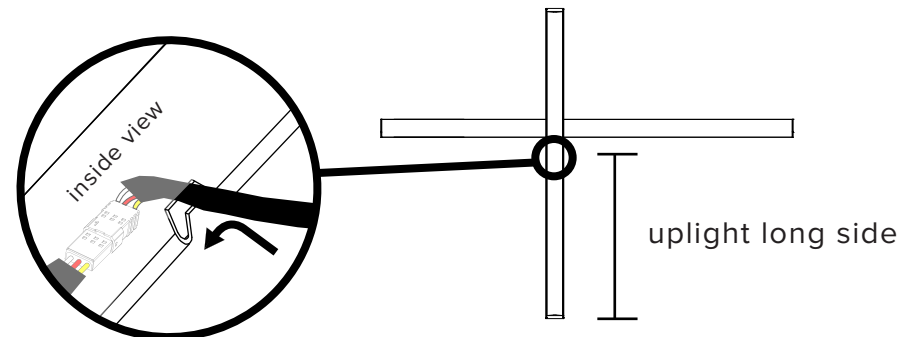


**4**


Reorientate uplight into the slot of the downlight.  
Screw it into place with provided allen key.

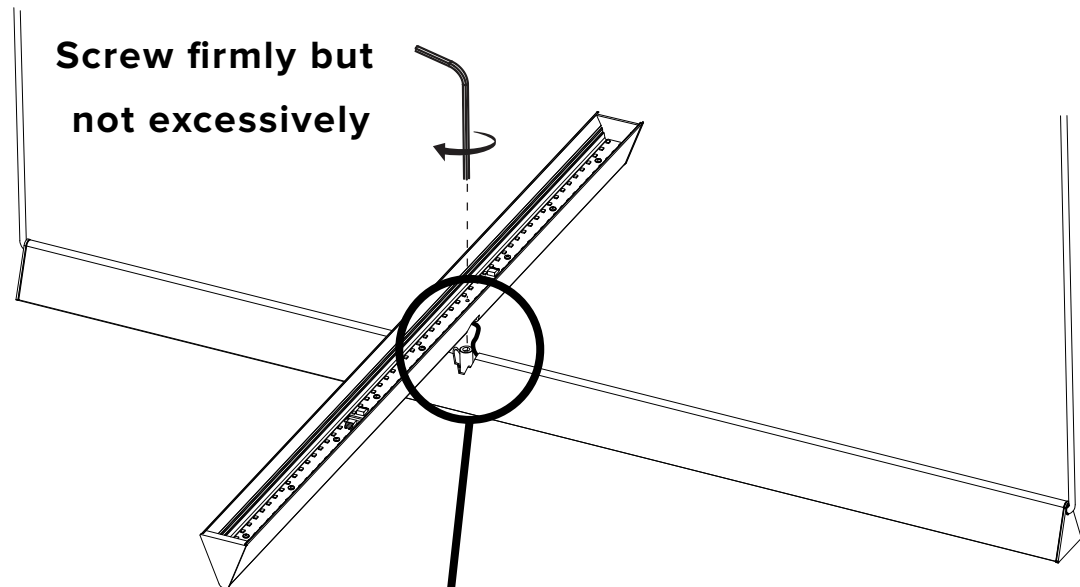

While you bring the two extrusions together ensure to place the downlight wires next to the anchor. Make sure the wire does not sit on top of the anchor and that it does not get pinched or scuffed.

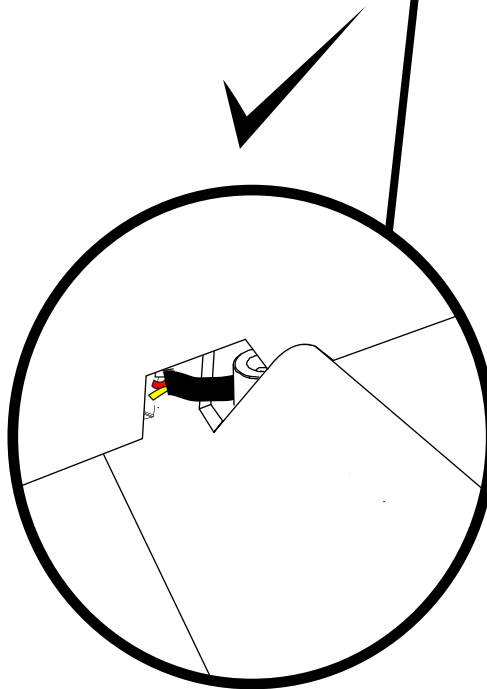

**X**

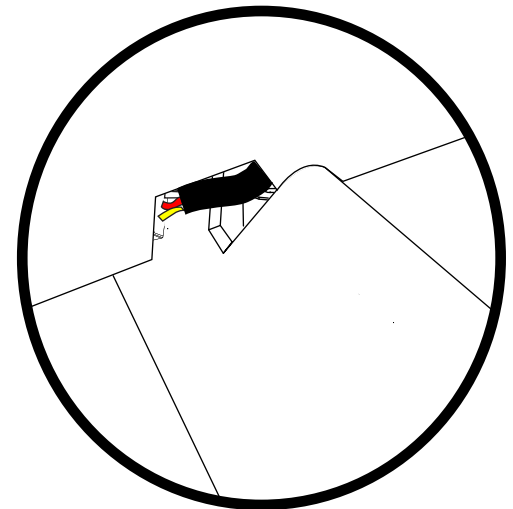


**5**

Slide lens into opposite endcap (1)

then snap lens back into slots (2).


Replace endcap (3).

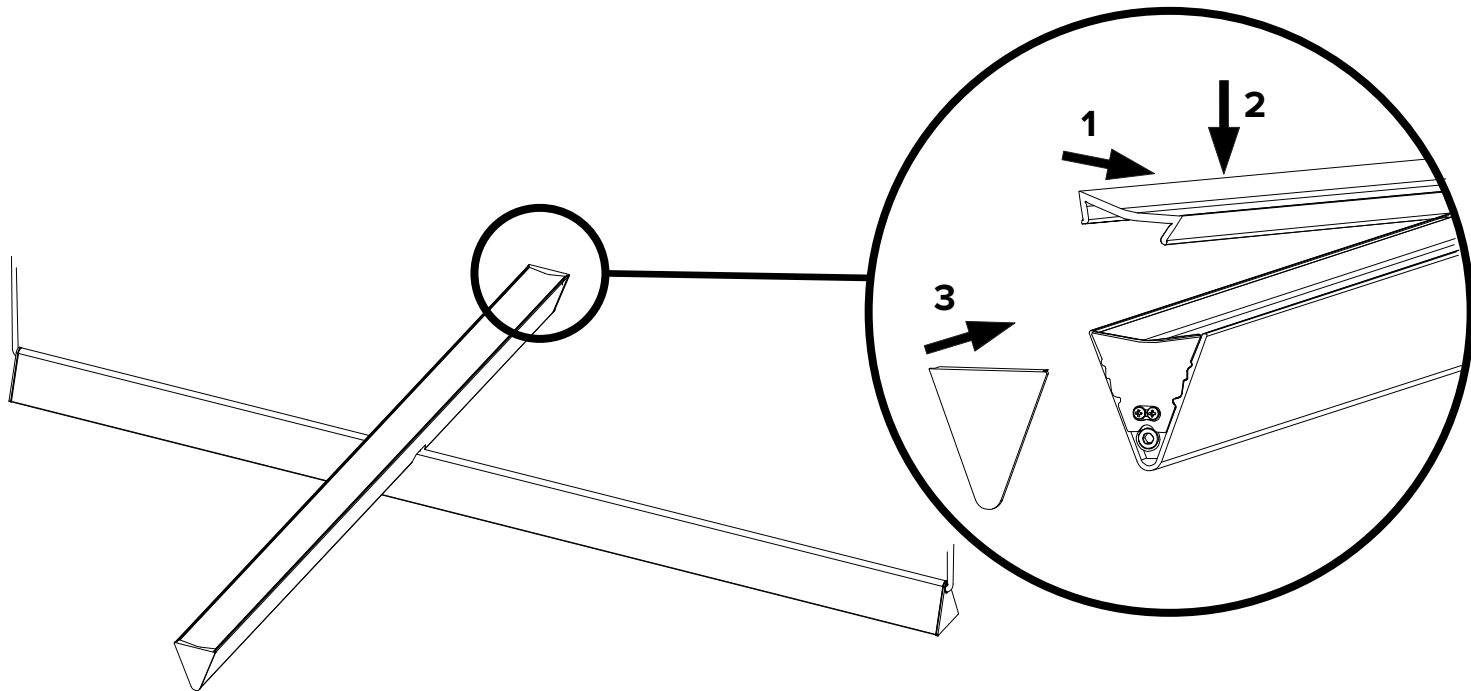

6



## Mark anchor locations

Be sure all ceiling holes are aligned.  
We recomend you mount luminaire with  
uplight aligned with junction box.

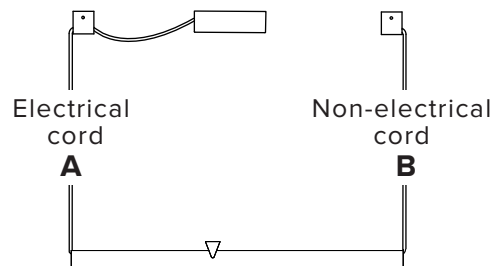



**Make sure to use appropriate  
anchors for ceiling material**

**MILE 01  
&  
MILE 03**

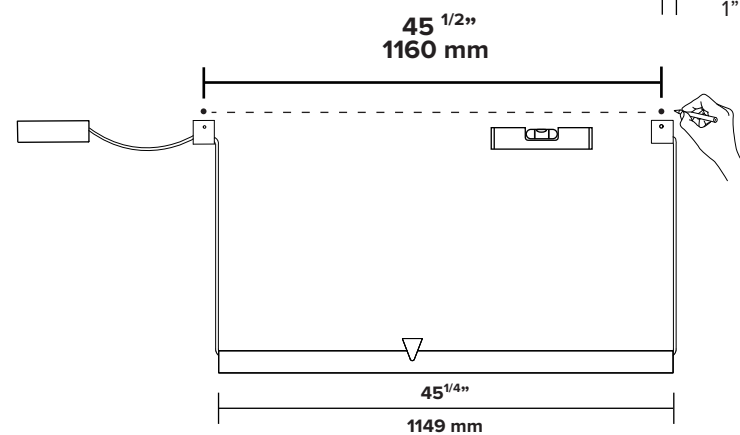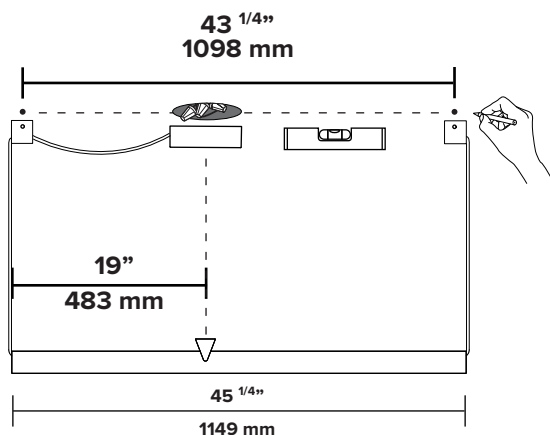

1" 25 mm  
Please note the edge of  
your luminaire will be  
1" from your anchor hole.

**MILE 02**

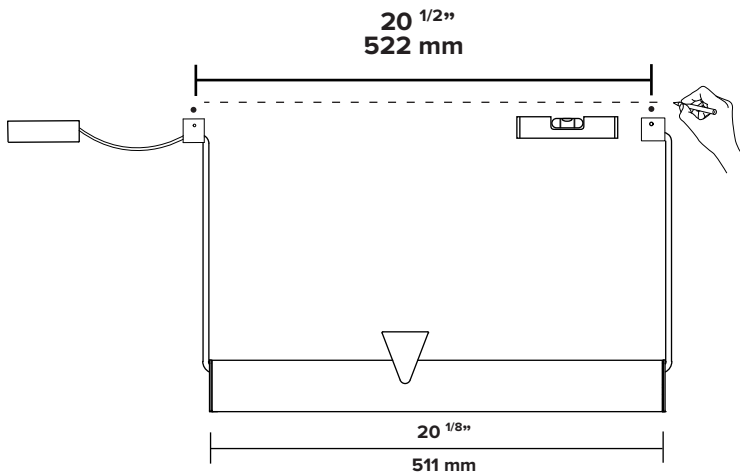
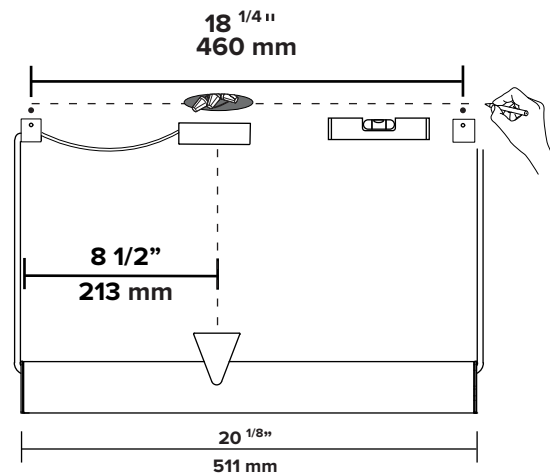


7


**Mount double hole anchor  
with electrical cord.**

Pull wires to straighten them before  
mounting them.




**A**  
double hole  
anchor

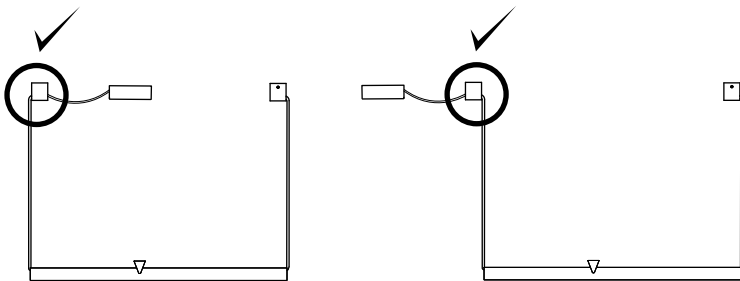



**Make sure to use appropriate  
anchors for ceiling material**



Remove or install  
cover by screwing and  
unscrewing set screw.

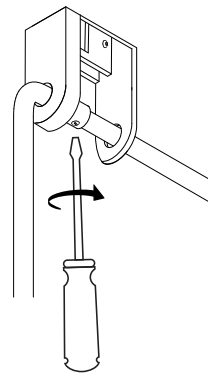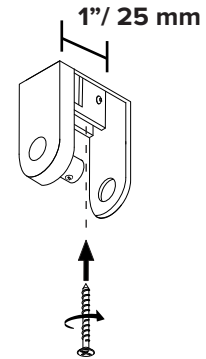

Screw gently, but firmly



Screw gently, but firmly




8

Mount single hole anchor with  
non-electrical cord.

Pull wires to straighten them before  
mounting them.


B

single hole  
anchor






Make sure to use appropriate  
anchors for ceiling material



1" / 25 mm



Remove or install  
cover by screwing and  
unscrewing set screw.

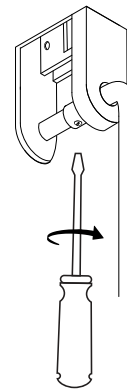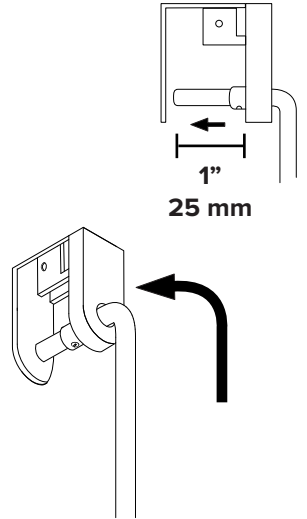

Screw gently, but firmly




Screw gently, but firmly



9


Open canopy cover.  
Depending on your location  
the cover is either held in  
place by magnets or by  
2 screws.

**Canopy with magnet**

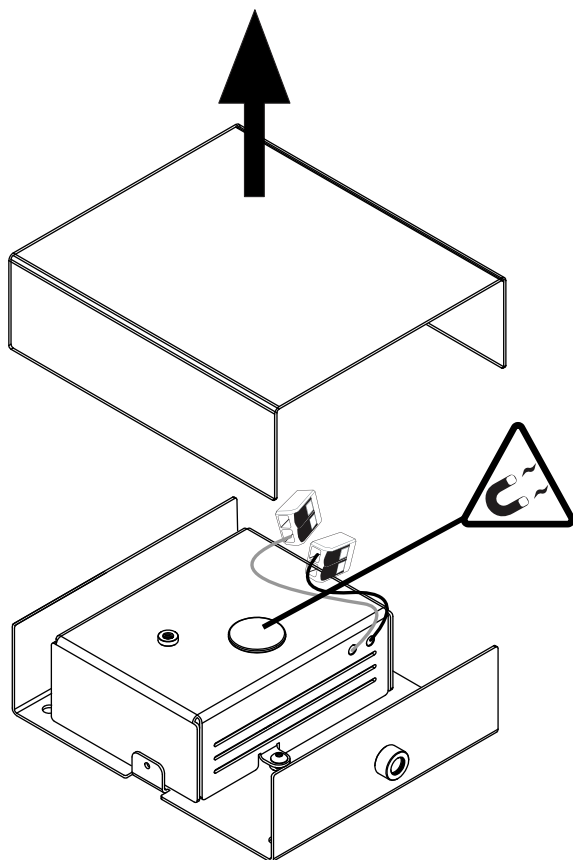


OR

**Canopy with screws**

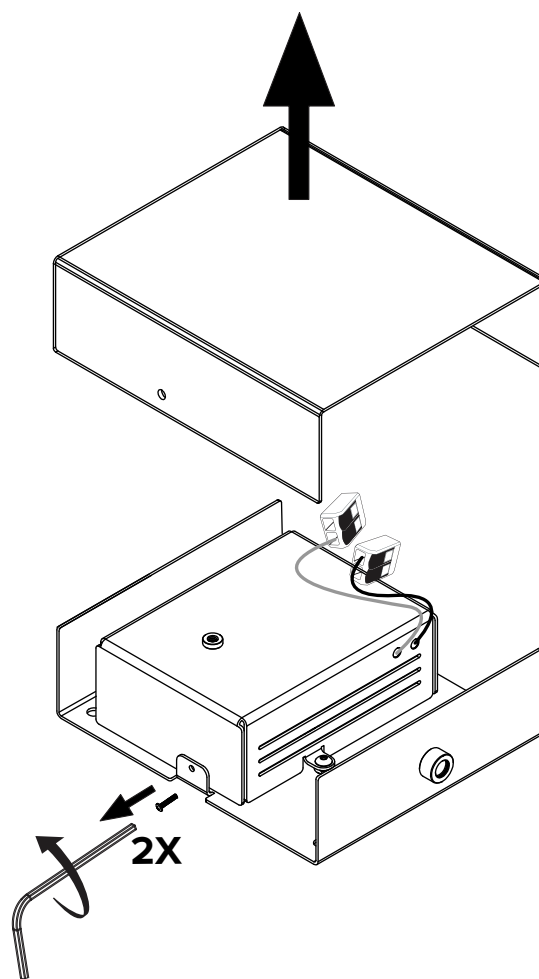

10

Unscrew driver housing. It is held in place by two screws. Place the housing aside.

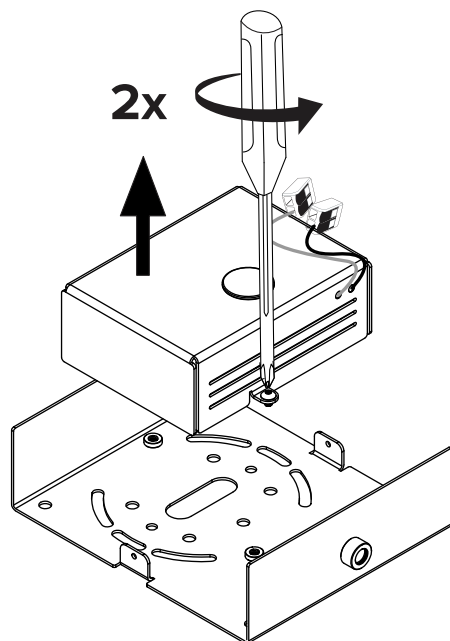


## INSTALL EXTENSION HARNESS TO LINE/MAIN VOLTAGE

11


Connect the extension harness to the junction box. The harness is shipped with the canopy.



for 120 V wiring




for 220-240 V wiring




12

Pass the extension harness through center hole of canopy.

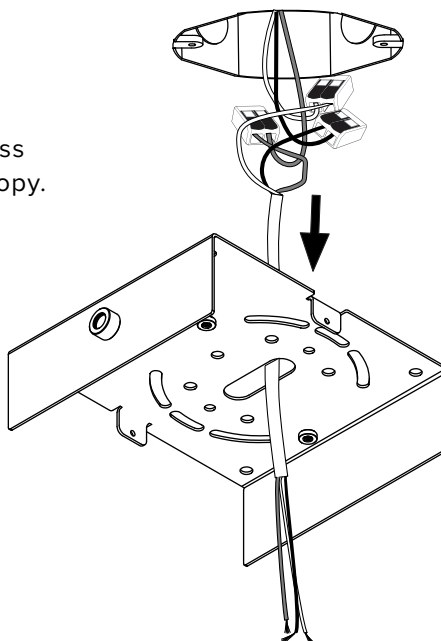

10

Unscrew driver housing. It is held in place by two screws. Place the housing aside.

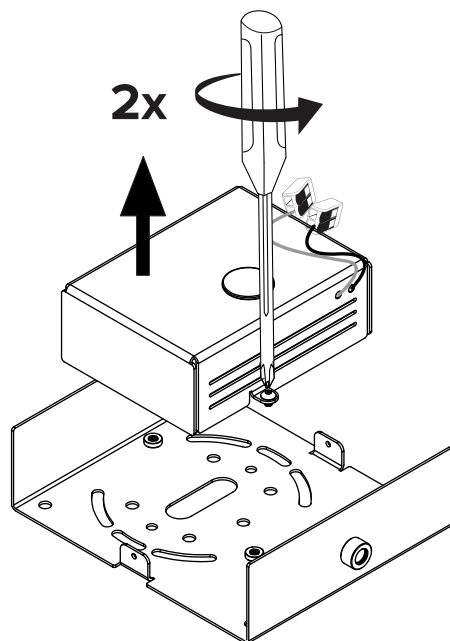


## INSTALL EXTENSION HARNESS TO LINE/MAIN VOLTAGE

11


Connect the extension harness to the junction box. The harness is shipped with the canopy.



for 120 V wiring




for 220-240 V wiring



12



Pass the extension harness through center hole of canopy.

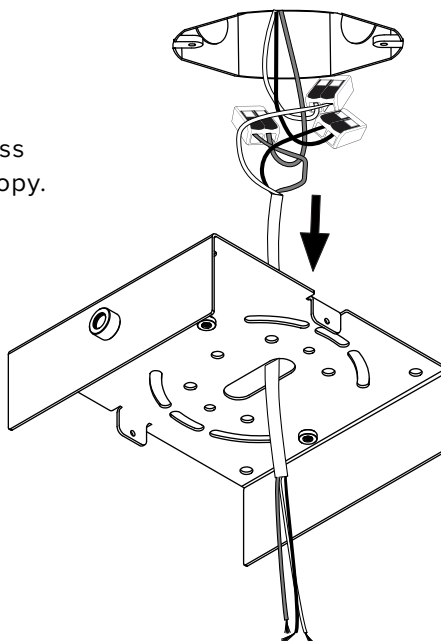


## MOUNT CANOPY BRACKET

13

The canopy can either be mounted to the junction box or directly to the ceiling using appropriate holes.

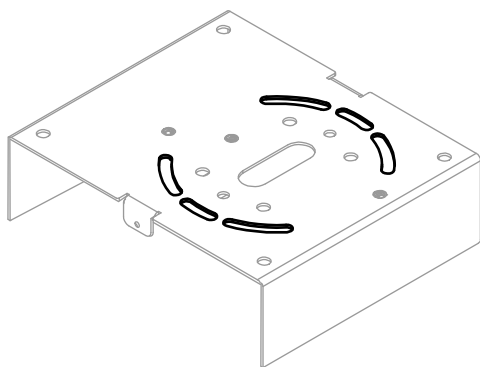


To junction box

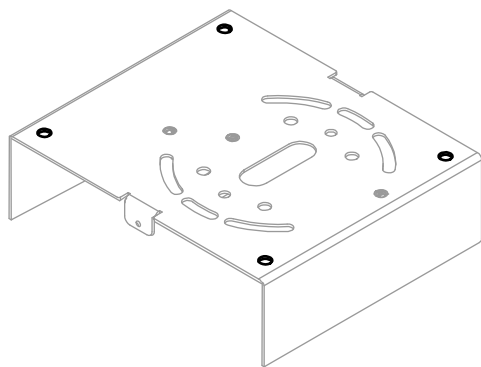

OR

directly to the ceiling  
\*use appropriate anchors

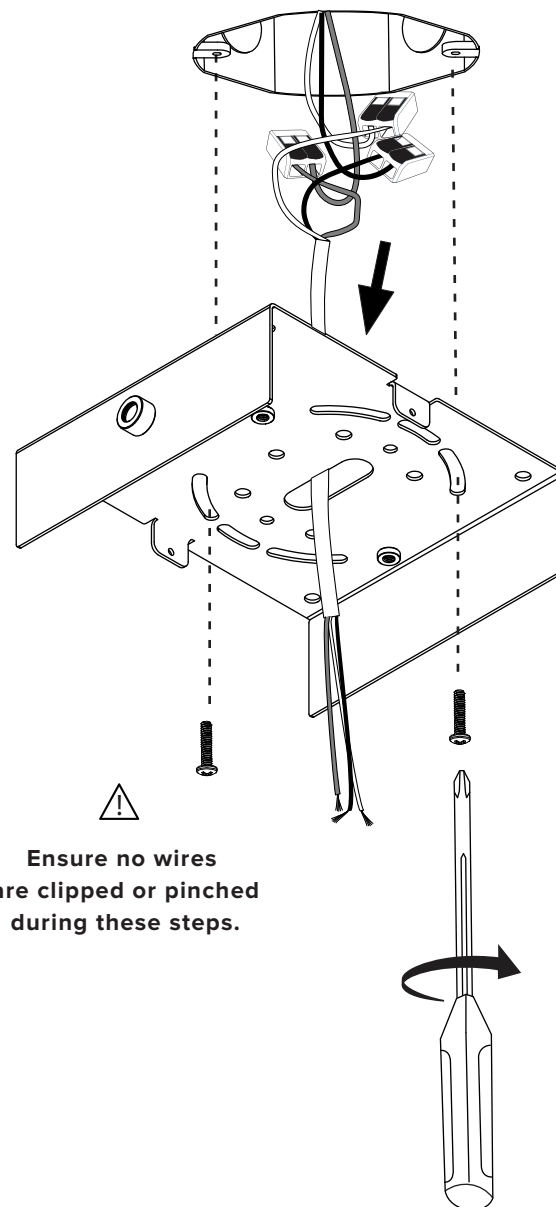


Ensure no wires  
are clipped or pinched  
during these steps.


# CONNECT EXTENSION HARNESS (ELECTRICAL BOX) TO DRIVER'S AC INPUT WIRES

14


Connect the other end  
of the extension harness  
to AC input wires  
of the driver.

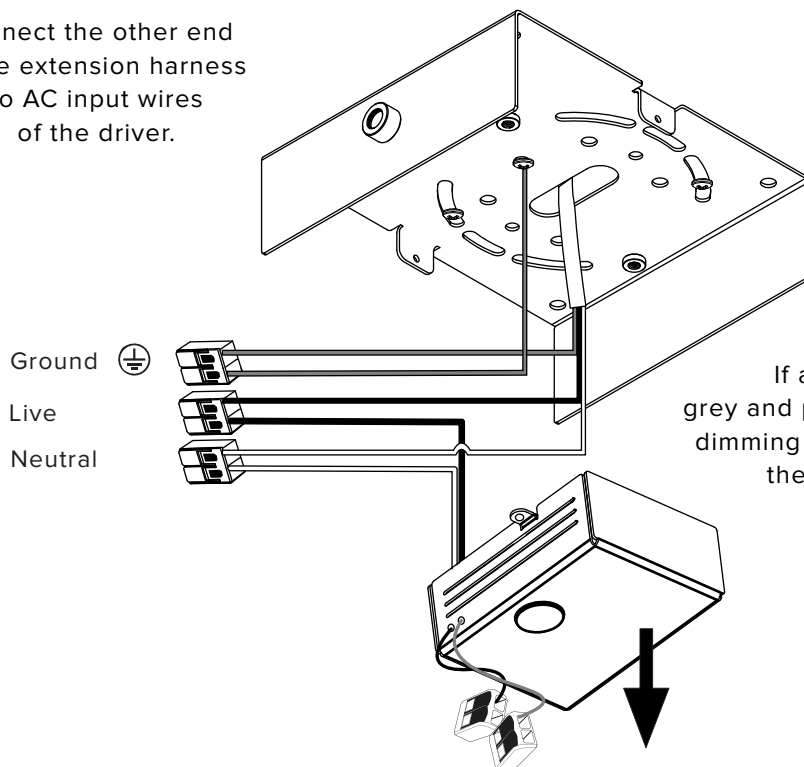

for 120 V wiring

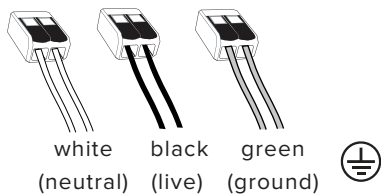


for 220-240 V wiring

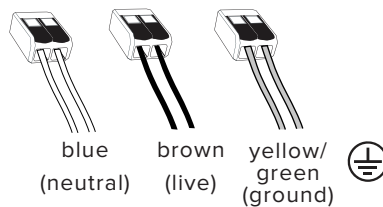

15



Carefully close  
driver enclosure. It is  
held by two screws.

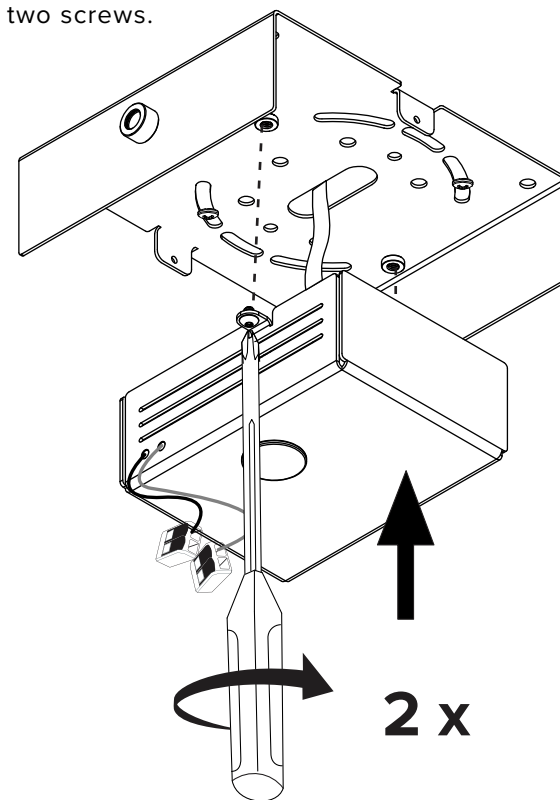

Ensure no wires  
are clipped or pinched  
during these steps.


**16**

Feed luminaire cord into the canopy strain relief.

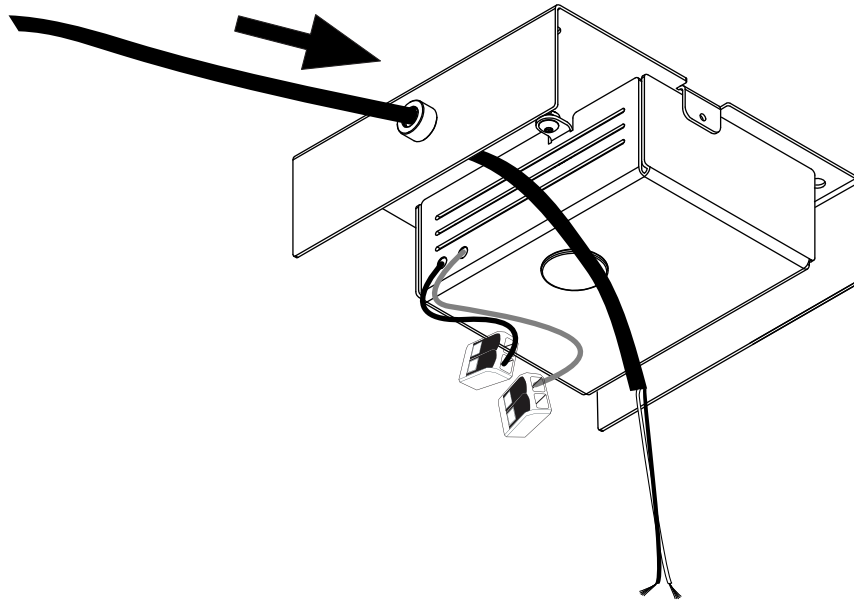

**17**


Tighten strain relief set screw when desired cord length is reached.

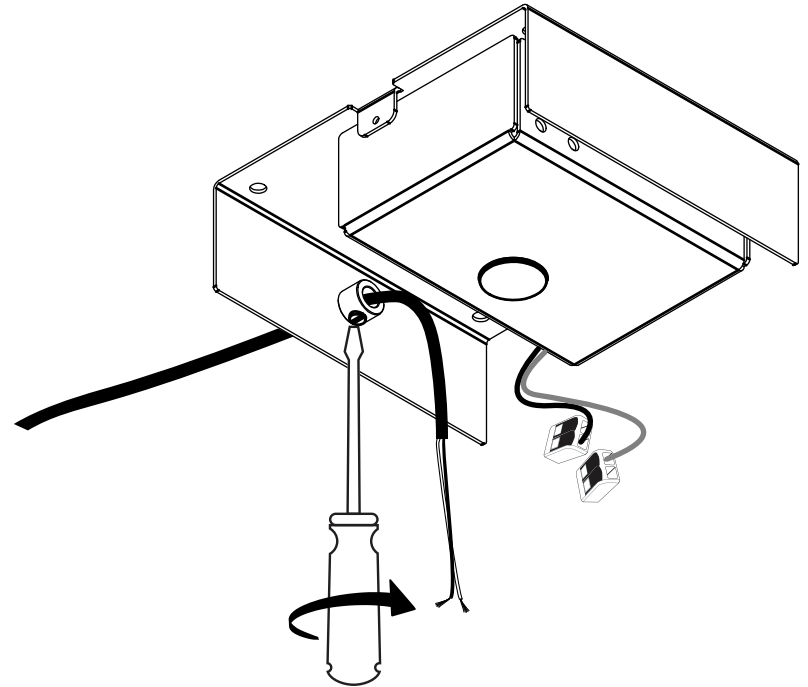

\*screw gently but firmly

## CONNECT LUMINAIRE CORD TO DRIVER DC WIRES

18

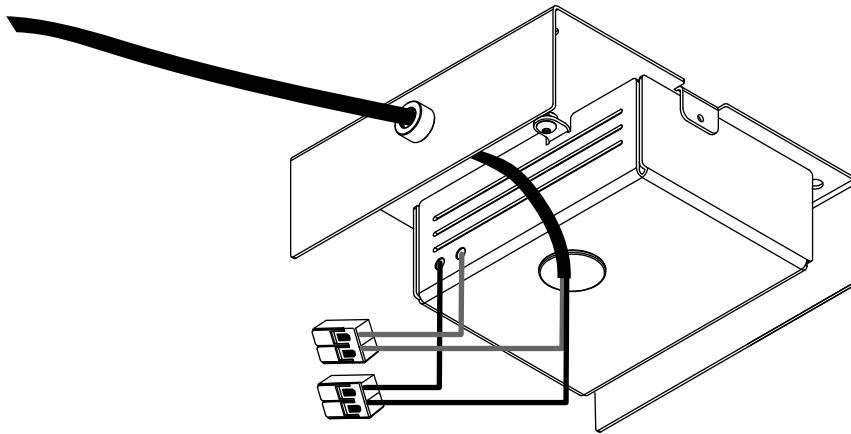


Trim end of cord  
to resemble this.

6" (153 mm)


Cut green/yellow  
as short as possible.  
It is not used in  
this assembly



Depending on your location,  
the luminaire cord will either be  
Blue (+) and brown (-)  
**or**  
White (+) and Black (-)




OR



19

Carefully close  
canopy cover that is held  
in place with a magnet.

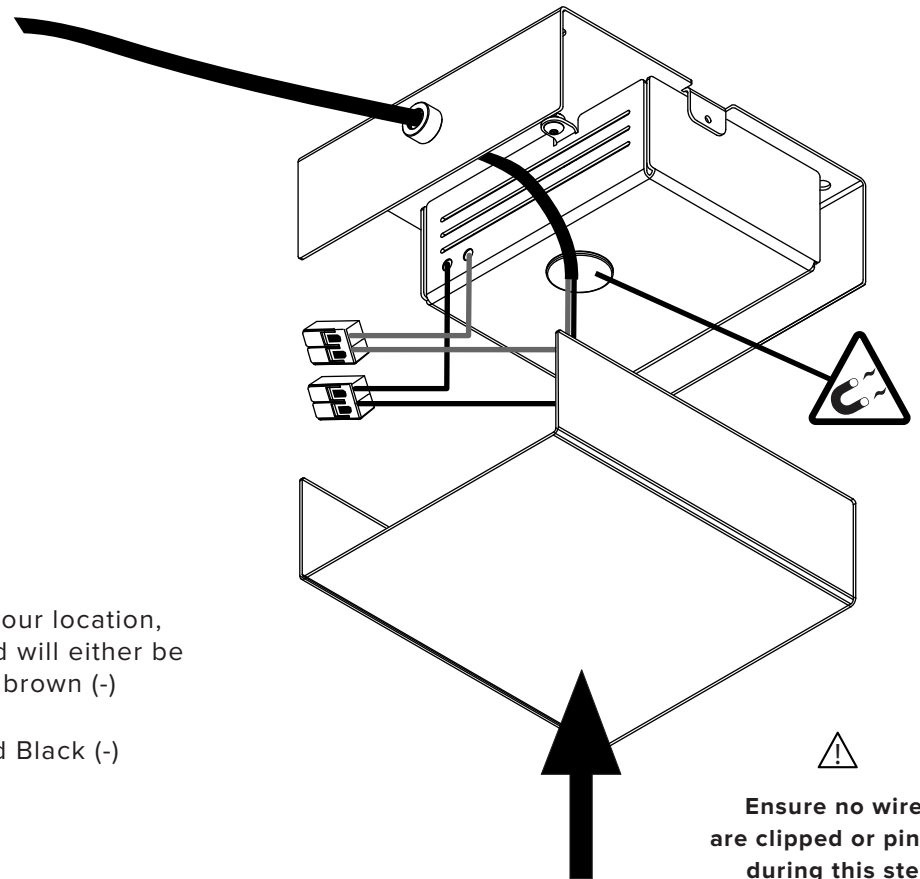


Ensure no wires  
are clipped or pinched  
during this step.


20

Close housing.  
The canopy cover is secured  
in place by a magnet or two screws  
depending on your model  
and location.

Canopy with magnet

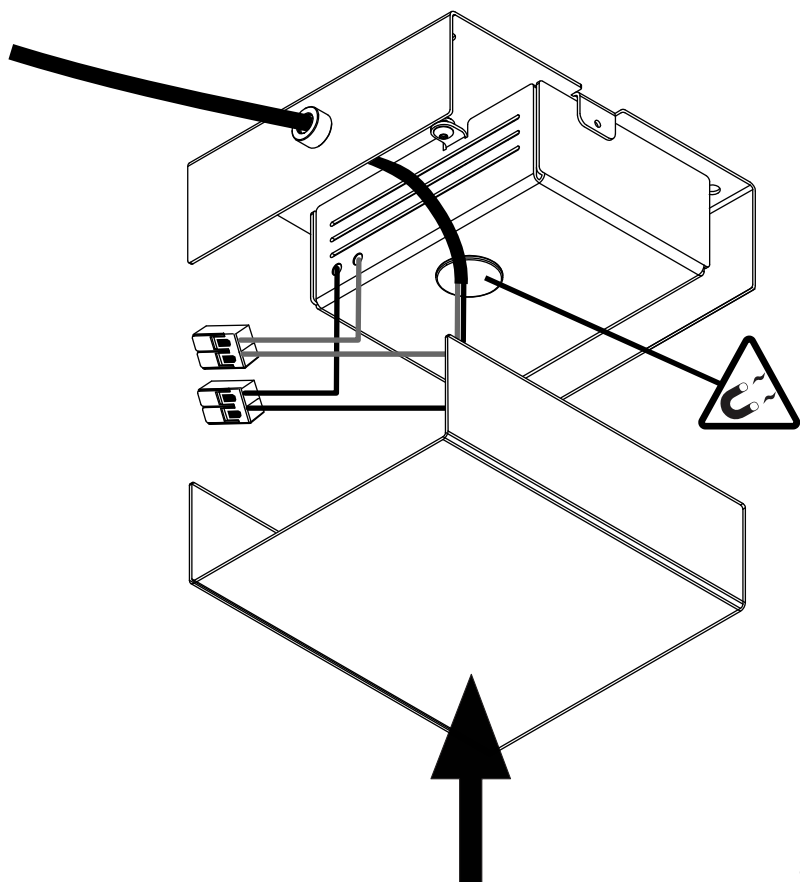

Canopy with screws

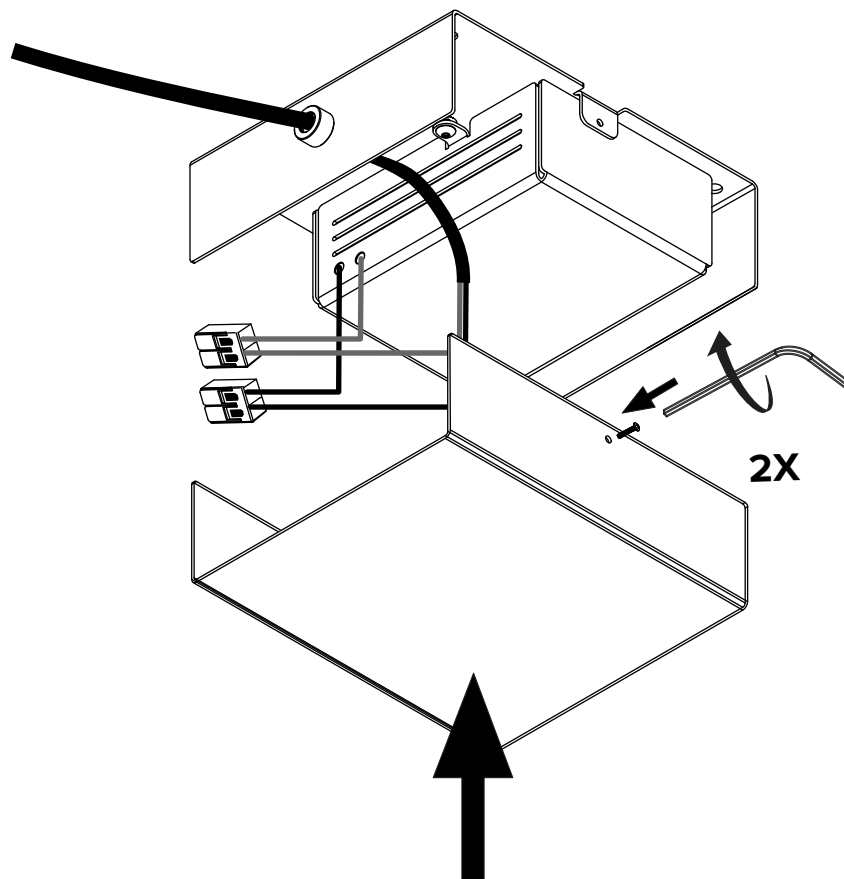

⚠  
Ensure no wires  
are clipped or pinched  
during this step.




# LEVELING THE LUMINAIRE



Before adjusting wire length or interior weight, carefully attempt to balance the luminaire by hand. The wire's flex can allow micro adjustments of their own.


21

if necessary level  
downlight by adjusting  
length of wires.

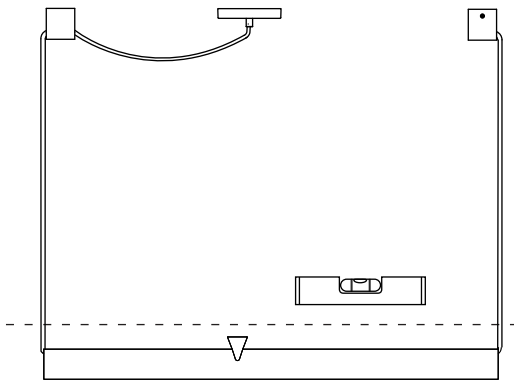


22

Should uplight adjustments  
be needed, remove endcap  
on short side arm.

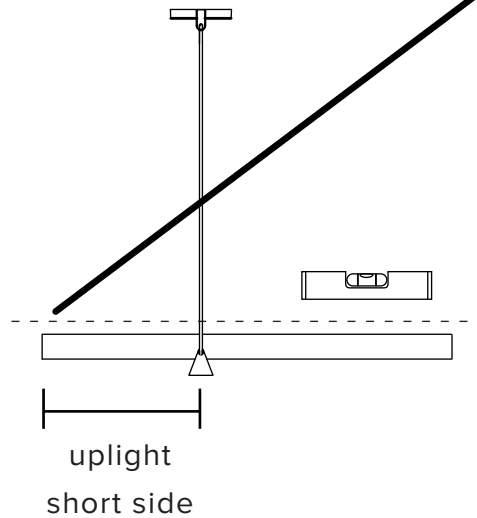

Endcap is held in place  
with a magnet.

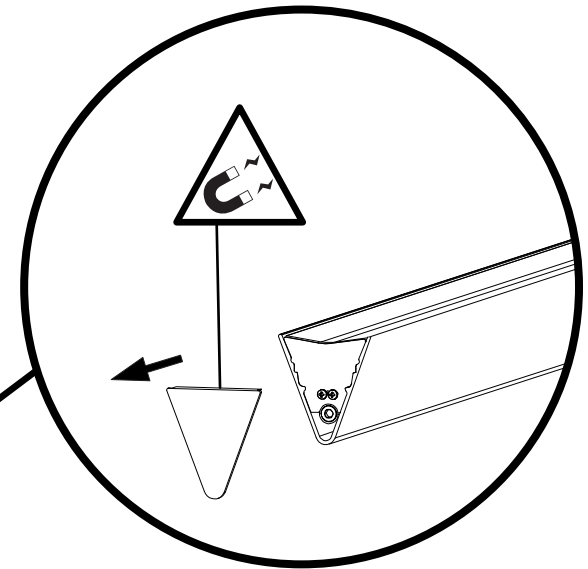

Becareful when removing  
endcap that it does not stick  
to other surfaces which could  
result in scratches in the paint.



23

The adjustment screw holding the balance weight is now visible. Use supplied allen key to screw weight in or out depending on balance.



**Note that the endcap affects final balance of luminaire!**


Luminaire will not appear balanced until the cap is in place.

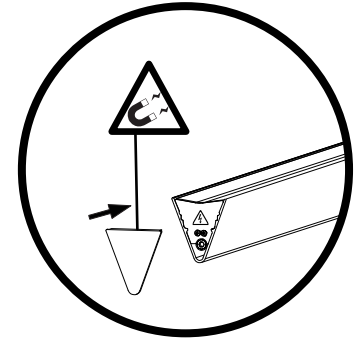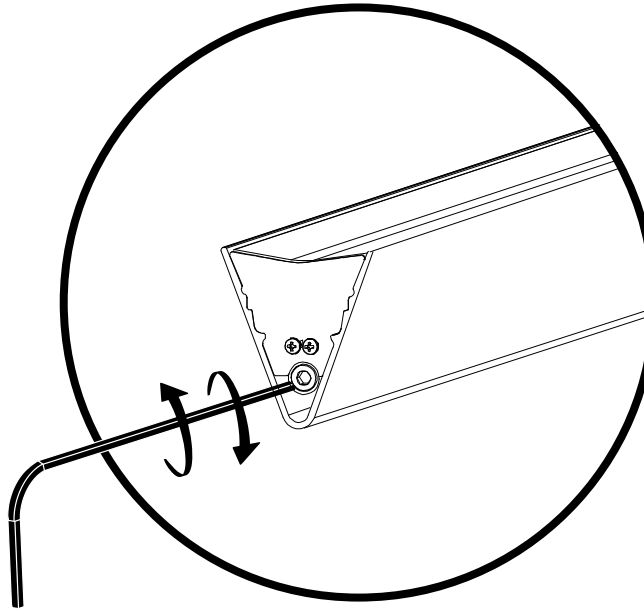


Replace endcap when adjustments are complete



Screw clockwise to pull weight towards you.

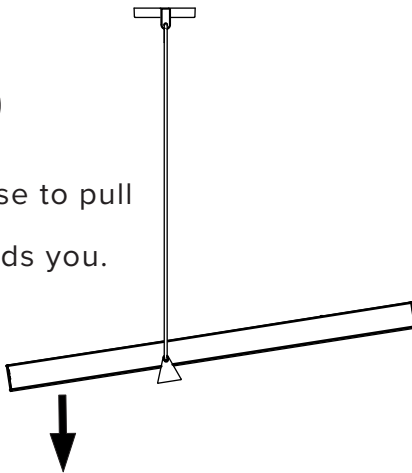

Screw counter-clockwise to push weight away from you.

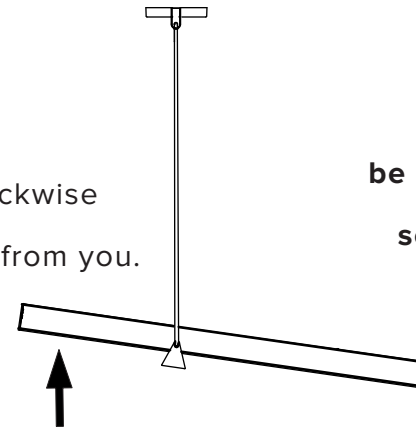

**Readjustments may be required as your luminaire settles and the wires flex.**