




## BEAUBIEN




<b>type</b>	ceiling (CE), floor (FL) and wall (WA)	
<b>materials</b>	body :	powdercoated steel and aluminium or brass
	hardware :	brass
	sphere :	milk glass (G50 + G80)
	chains :	brass (CE)
	wire:	nylon/polyester
<b>wire length</b>	120" / 3048 mm	
	footswitch positioned at 60" from body	
<b>weight</b>	starting at 7.5 lb / 3.4 kg	
<b>light bulb</b>	LED (included), 1 x 4,5W + 3 x 3,5W	
<b>sockets</b>	G9	
<b>voltage</b>	120V / 240V	
<b>dimmer</b>	For ceiling installation only refer to our recommended list of dimmer models	
<b>certifications</b>	 	
<b>notes</b>	– additional charges for modifications or for special orders	
	– lead time between 8-9 weeks	
	– dimensions are approximate and may vary slightly	




FLOOR

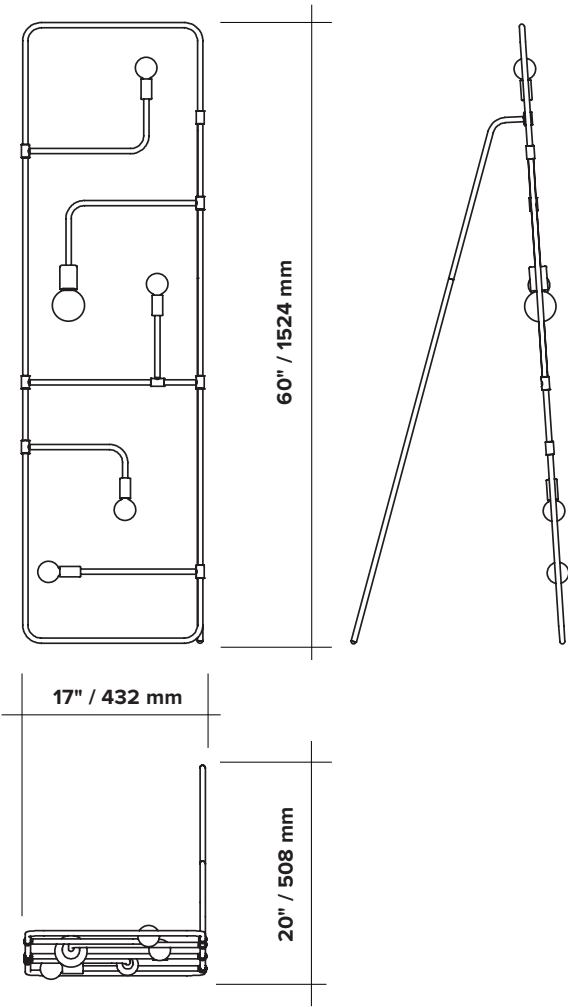

WALL

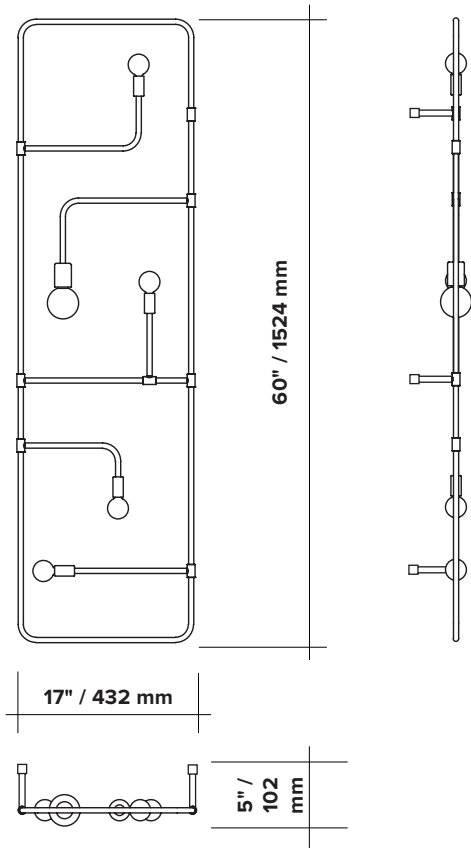


CEILING

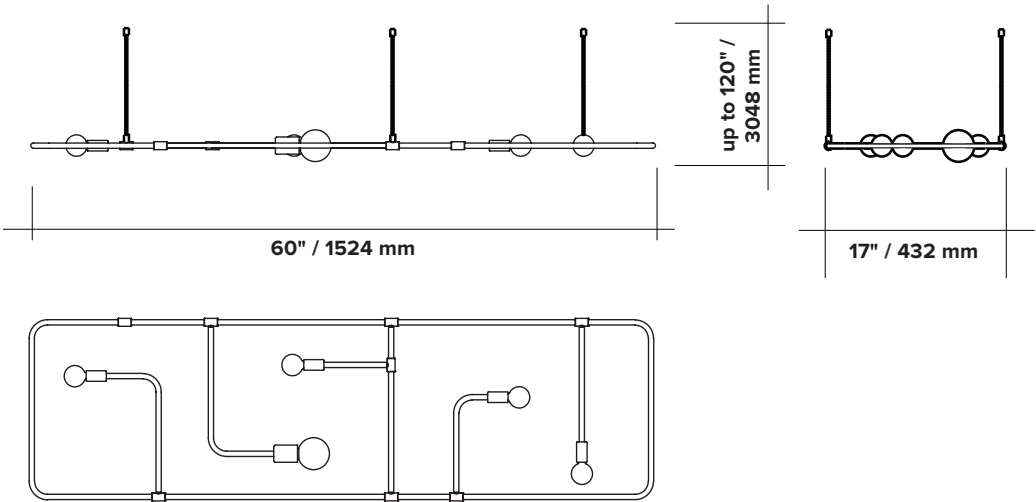


COLLECTION		MODEL	INSTALLATION		FINISH (body/hardware)	
BEA	beaubien	01	FL	floor	BLBR	black body/brass hardware
			WASW	wall softwire	BLGR	black body/graphite hardware
			WAHW	wall hardwire	BRBR	brass body/brass hardware
BEA		01	FL		BLBR	= BEA01FLBLBR
						example

FINISH





brass



flat black



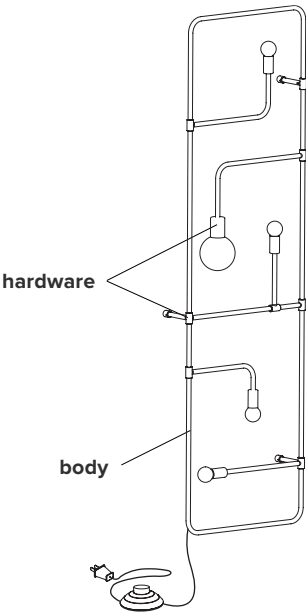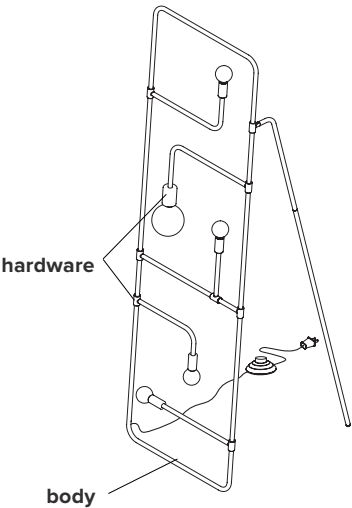


graphite






COLLECTION		MODEL	INSTALLATION		FINISH (body/hardware/canopy)	
BEA	beaubien	01	CE	ceiling	BLBRBLBL	black body/brass hardware/black wire/black canopy
					BLBRBLWH	black body/brass hardware/black wire/white canopy
					BLGRBLBL	black body/graphite hardware/black wire/black canopy
					BLGRBLWH	black body/graphite hardware/black wire/white canopy
					BRBRBLBR	brass body/brass hardware/black wire/brass canopy
					BRBRBLWH	brass body/brass hardware/black wire/white canopy
BEA		01	CE		BLBRBLBL	= BEA01CEBLBRBLBL
						example

FINISH




brass      flat black      graphite

CANOPY COLOR




brass      flat black      flat white

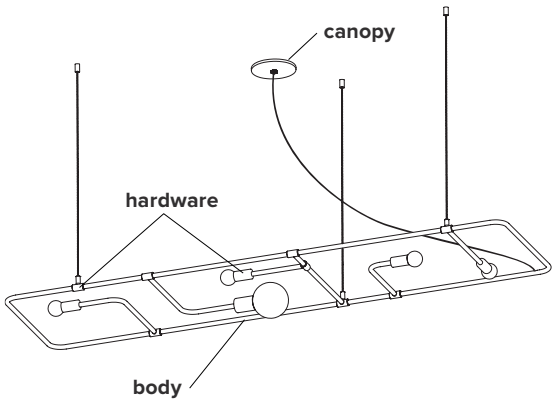


LIGHT BULB

G9 SOCKETS




Frosted  
4.5W  
100V-120V / 240V  
450 Lumens  
2700 K  
25 000 H  
CRI ≥80  
2 years warranty



Frosted  
3.5W  
100V-120V / 240V  
350 Lumens  
2700 K  
25 000 H  
CRI ≥80  
2 years warranty



SPHERES



G80     $\varnothing$  ± 3" / 80 mm



G50     $\varnothing$  ± 2" / 50 mm

& DIMMER SPECIFICATIONS  
(CEILING INSTALLATION ONLY)

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.