


MILE 04 A,B,C



- To be installed by an electrician to an electrical box
- Use appropriate screws and anchors where necessary
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site
- Should be used exclusively as a lamp and not as a shelving, display or hanging unit

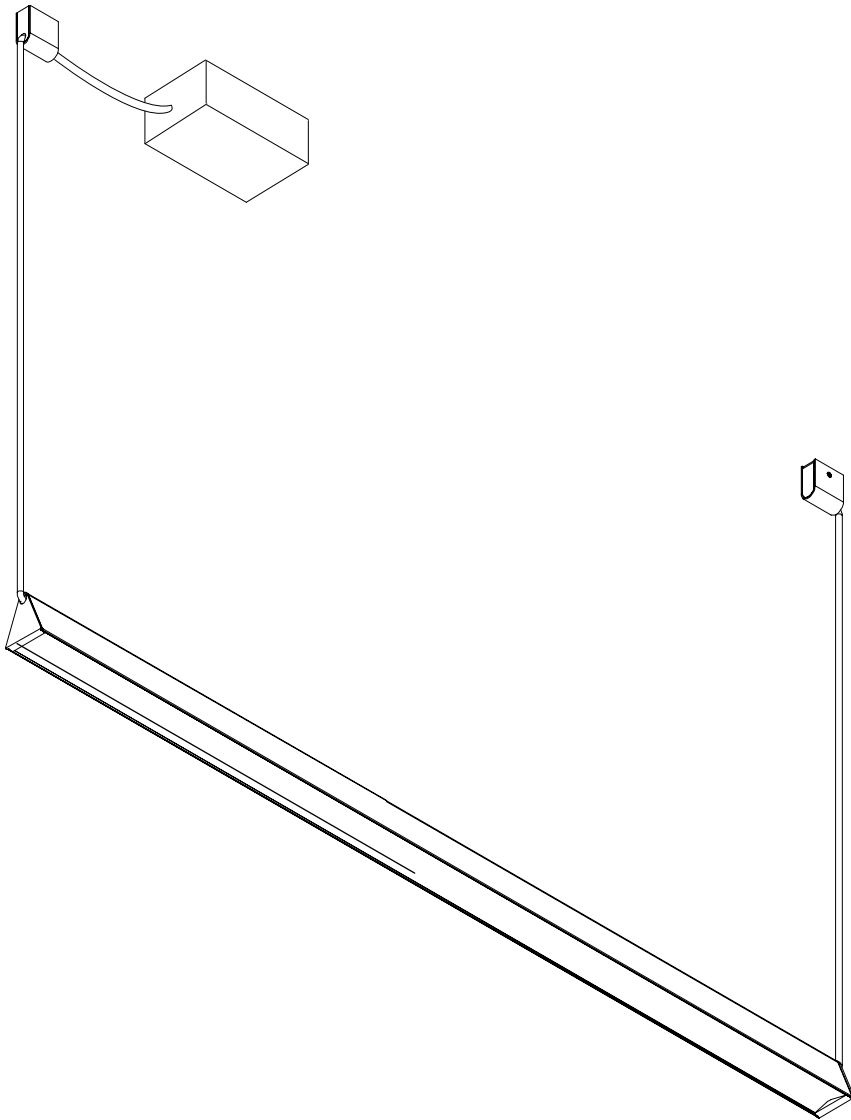

lamp weight **4-9 lbs.**

1


Mark anchor locations

Be sure all ceiling holes are aligned.





Make sure to use appropriate anchors for ceiling material



Please note the edge of your luminaire will be 1" from your anchor hole.

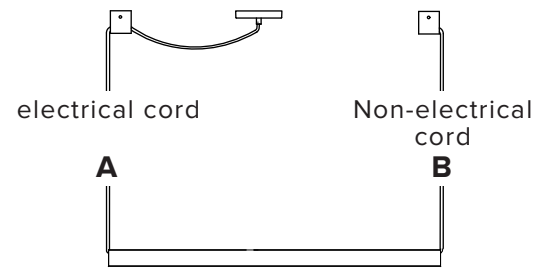



A

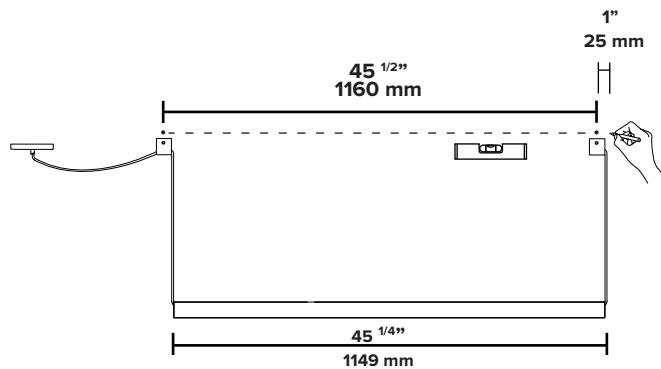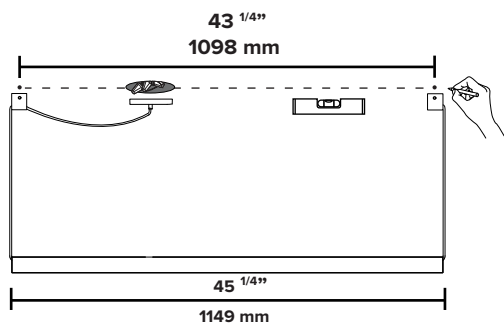

B

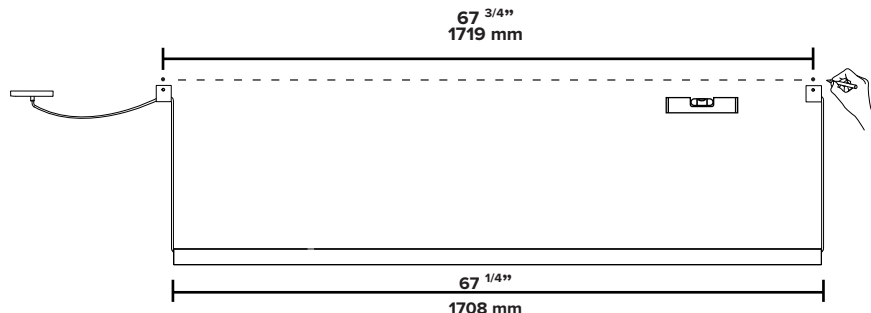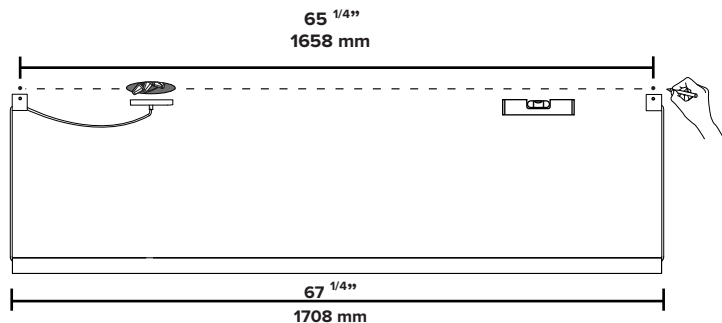



C

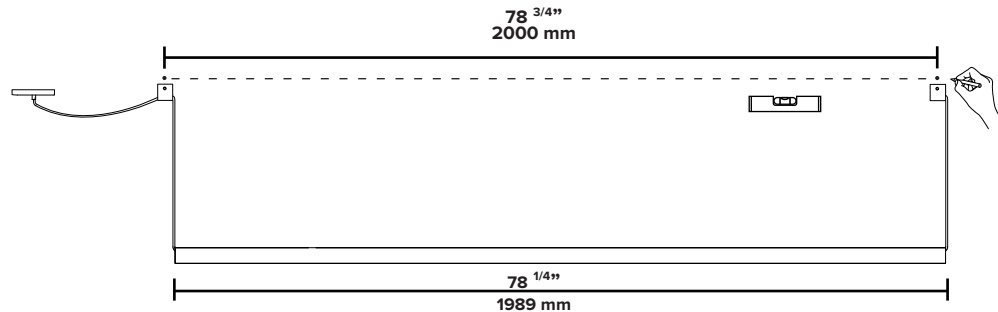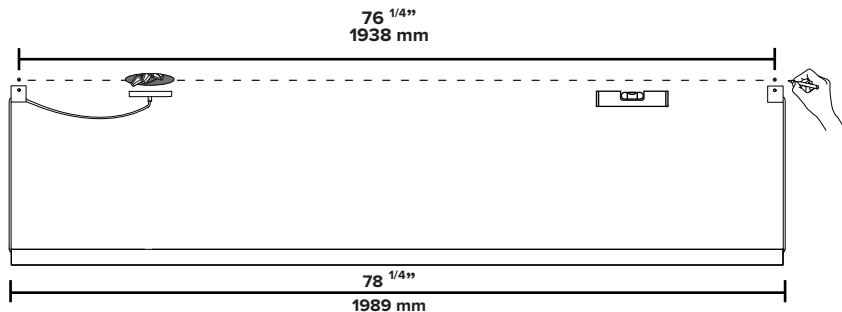


2

Mount double hole anchor with
line/main voltage cord.

Pull wires to straighten them
before mounting them.

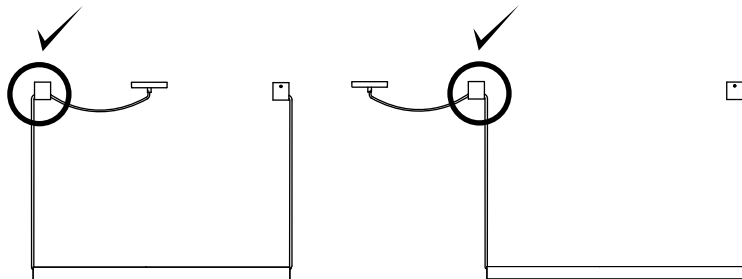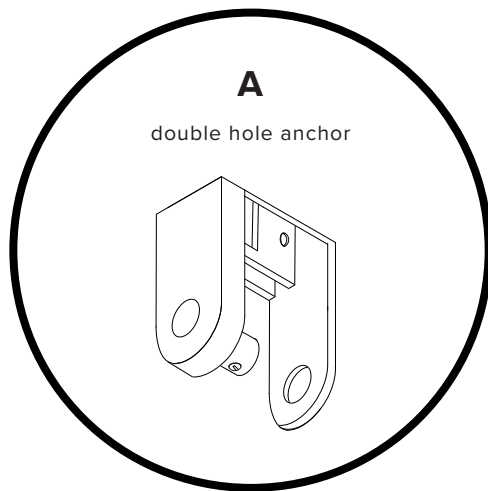

**Make sure to use appropriate
anchors for ceiling material**

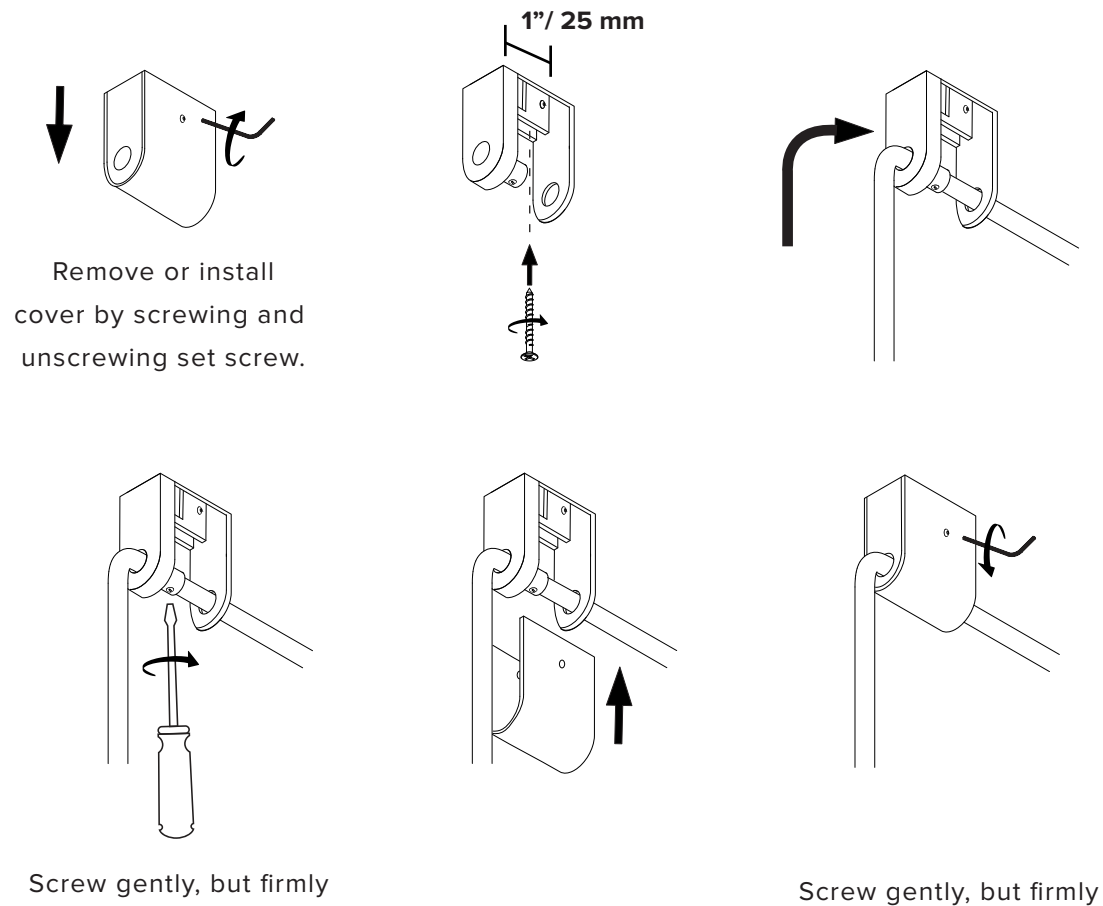




3

Mount single hole anchor with
non-electrical cord.




Pull wires to straighten them
before mounting them.

B



single hole anchor

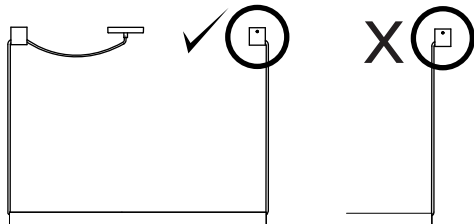

Remove or install
cover by screwing and
unscrewing set screw.

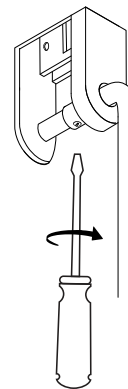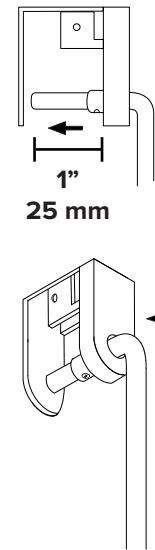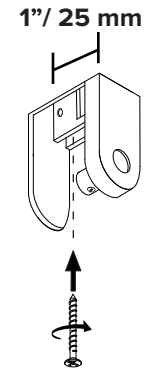

Screw gently, but firmly




Screw gently, but firmly

4


Open canopy cover.
Depending on your location
the cover is either held in
place by magnets or by
2 screws.

Canopy with magnet

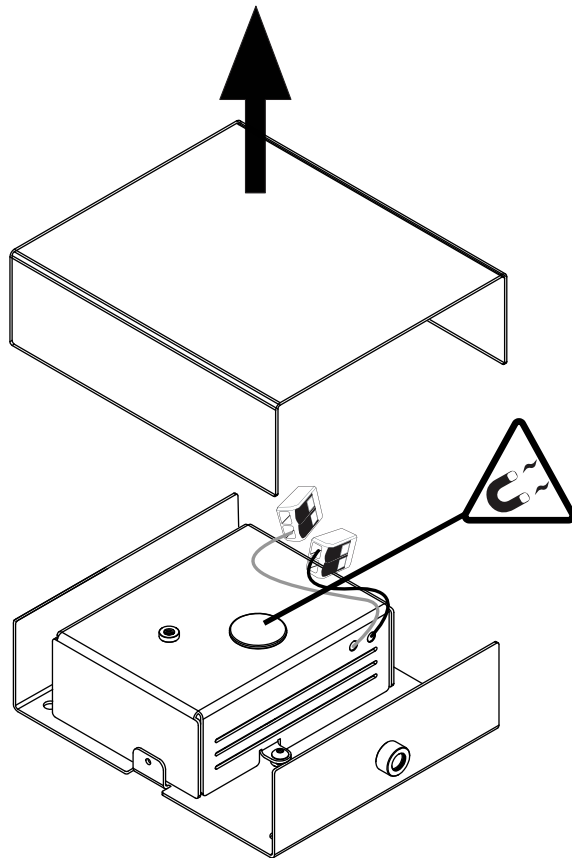


OR

Canopy with screws

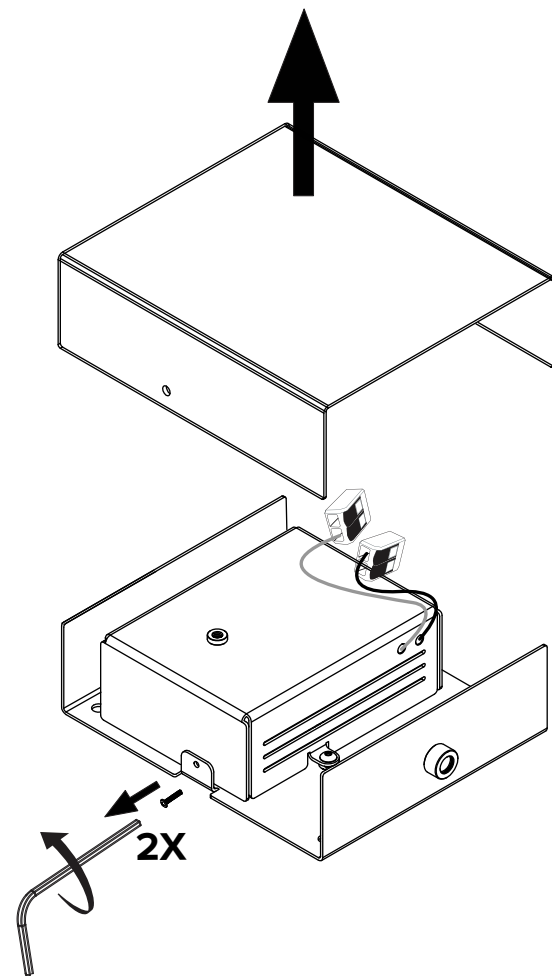

5

Unscrew driver housing. It is held in place by two screws. Place the housing aside.

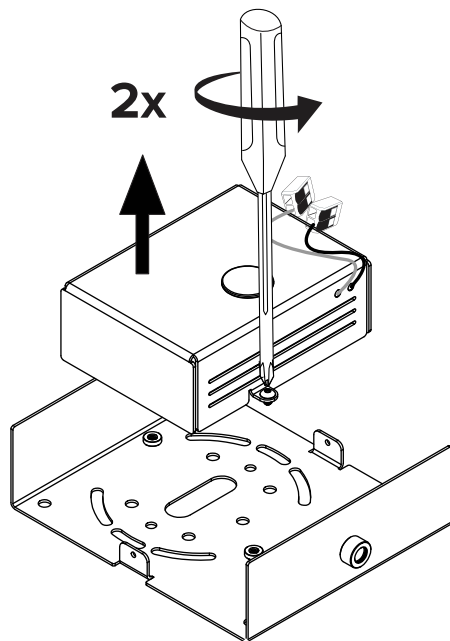


INSTALL EXTENSION HARNESS TO LINE/MAIN VOLTAGE

6


Connect the extension harness to the junction box. The harness is shipped with the canopy.



for 120 V wiring




for 220-240 V wiring



7



Pass the extension harness through center hole of canopy.

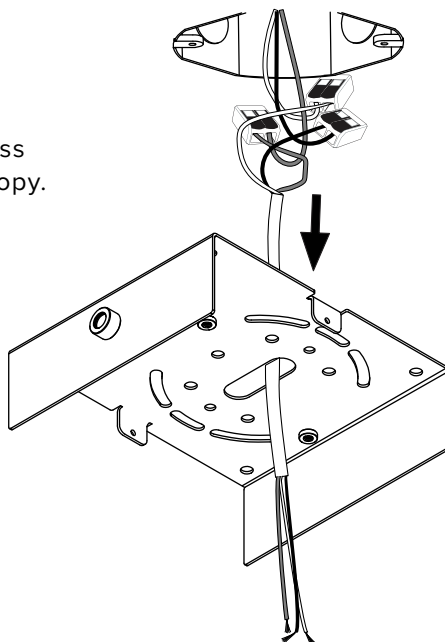


MOUNT CANOPY BRACKET

8

The canopy can either be mounted to the junction box or directly to the ceiling using appropriate holes.

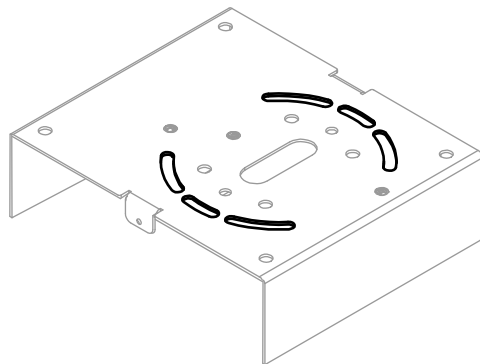


To junction box

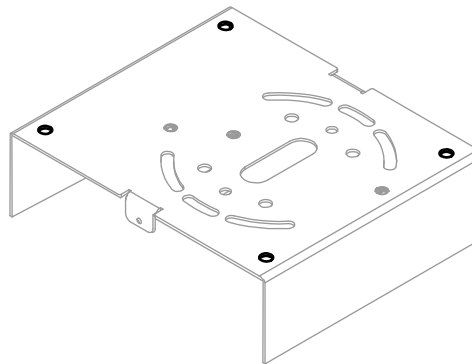

OR

directly to the ceiling
*use appropriate anchors

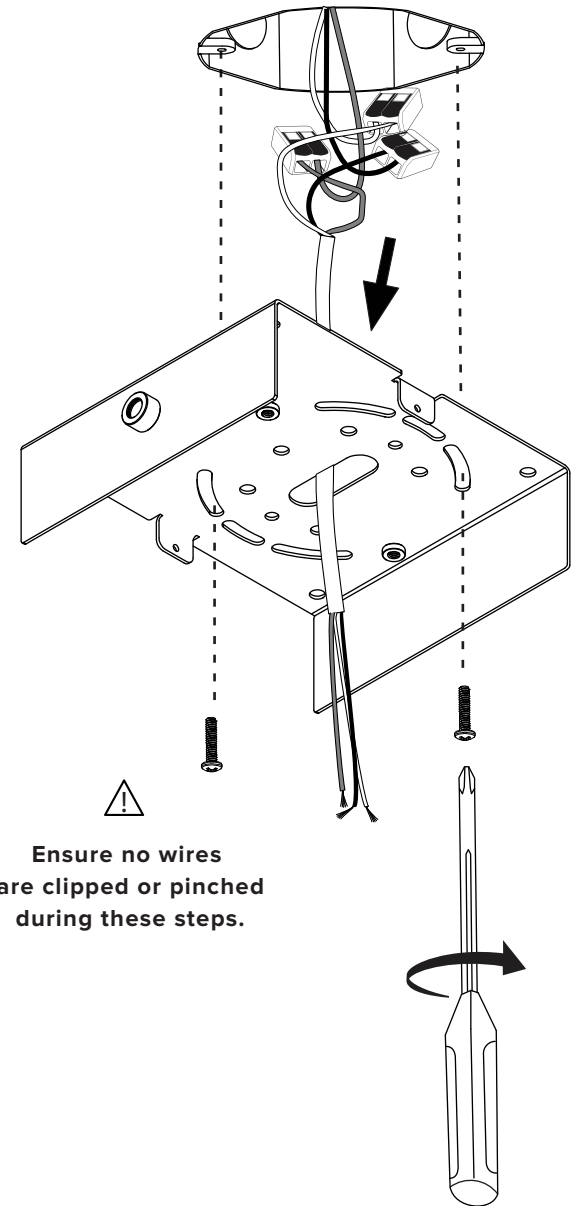


Ensure no wires
are clipped or pinched
during these steps.


CONNECT EXTENSION HARNESS (ELECTRICAL BOX) TO DRIVER'S AC INPUT WIRES

9


Connect the other end
of the extension harness
to AC input wires
of the driver.

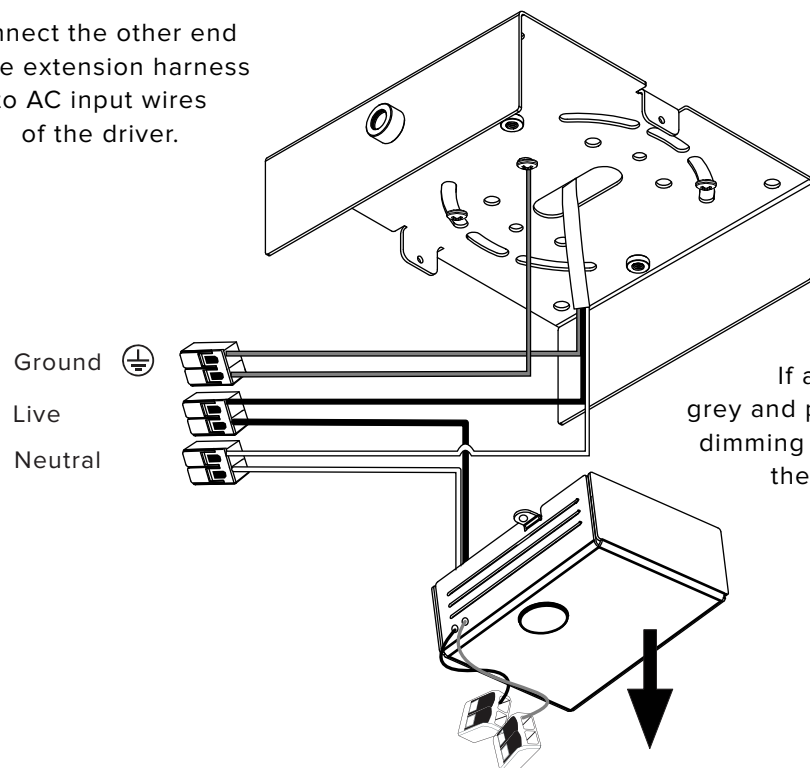

for 120 V wiring

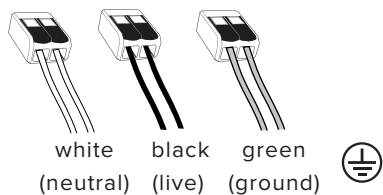


for 220-240 V wiring

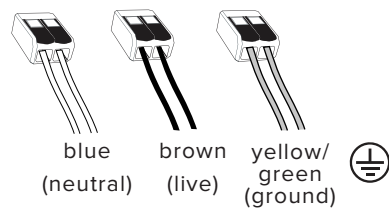

10


Carefully close
driver enclosure. It is
held by two screws.

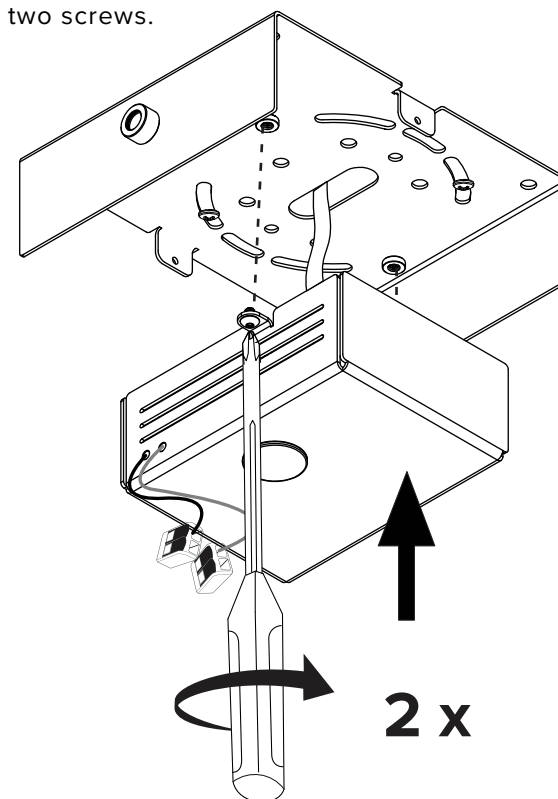

Ensure no wires
are clipped or pinched
during these steps.


11

Feed luminaire cord into the canopy strain relief.



12


Tighten strain relief set screw when desired cord length is reached.

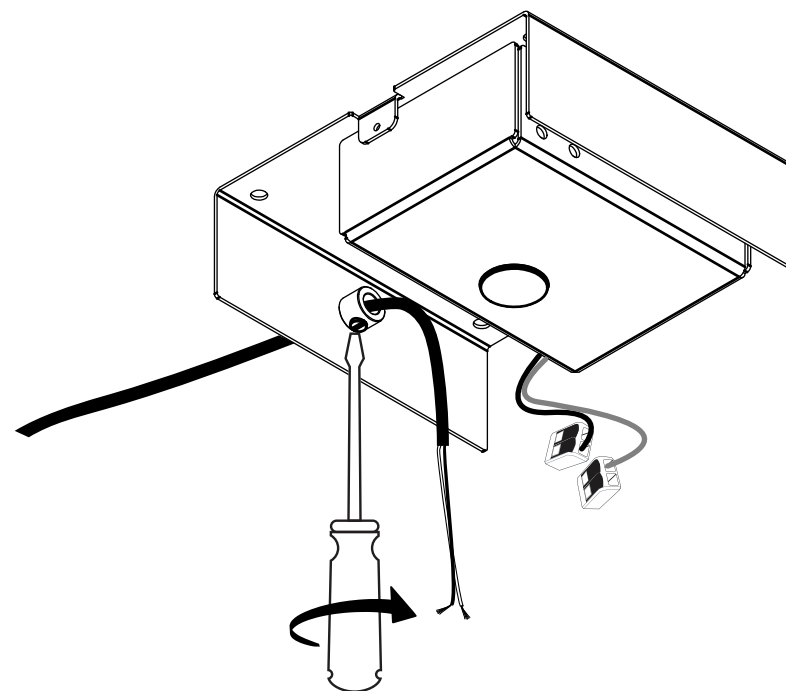

*screw gently but firmly

**CONNECT LUMINAIRE CORD
TO DRIVER DC WIRES**

13

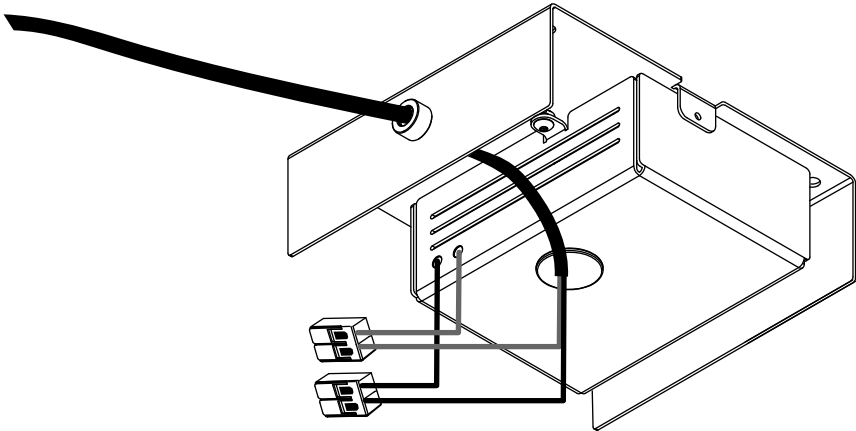


**Trim end of cord
to resemble this.**


6" (153 mm)

Cut green/yellow
as short as possible.
It is not used in
this assembly

Depending on your location,
the luminaire cord will either be
Blue (+) and brown (-)
or
White (+) and Black (-)




OR




14

Close housing.
The canopy cover is secured
in place by a magnet or two screws
depending on your model
and location.

Canopy with magnet

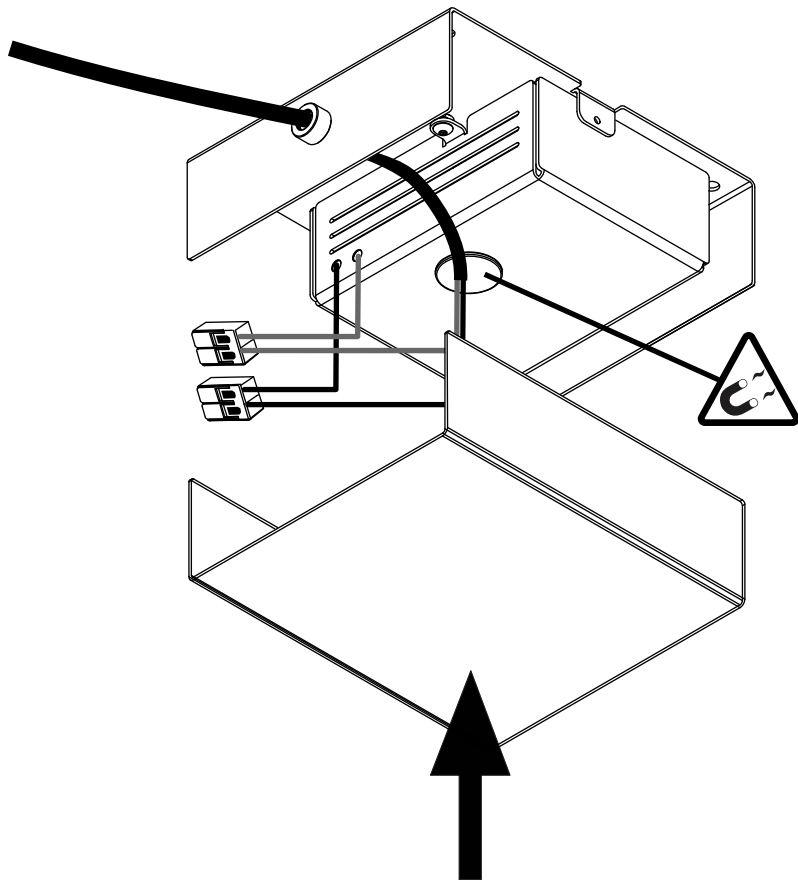

Canopy with screws

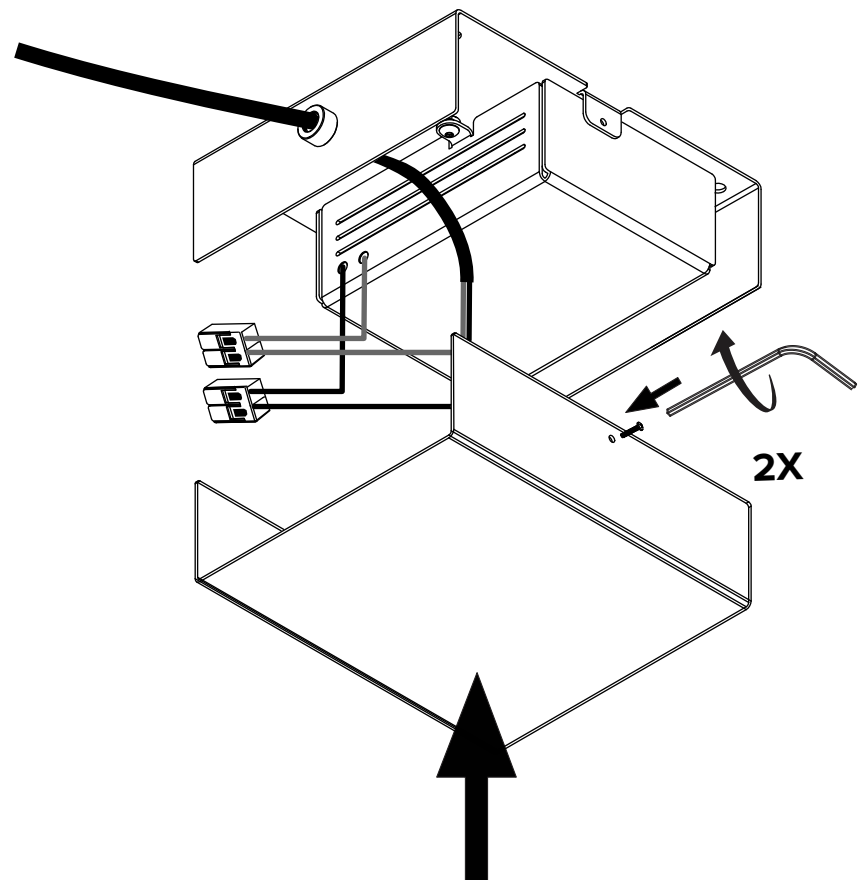


⚠
Ensure no wires
are clipped or pinched
during this step.

LEVELING THE LUMINAIRE

15

Adjust wire length to assure
your lamp is balanced.

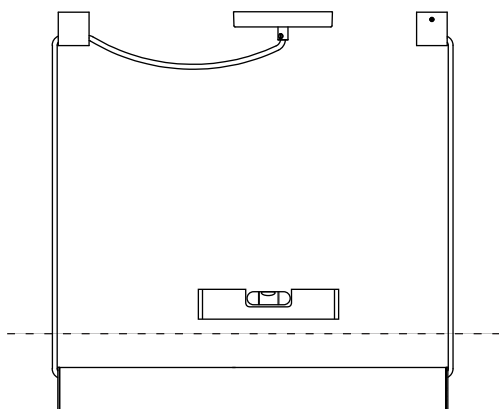

**Readjustments may be required
as your luminaire settles and the
wires flex.**