
# lambert&fils

## **BEAUBIEN SIMPLE SHADE**




type	wall					
materials	shade : body : sphere : hardware : canopy: wire:	powdercoated aluminium powdercoated steel milk glass (G50) brass powdercoated steel nylon				
weight	1.5 lb / 0.7 kg					
light bulb	LED (included), 1x 3,5W					
sockets	G9					
voltage	120V / 240V					
dimmer	refer to our recommended list of dimmer models					
certifications	CE					
notes	<ul> <li>must be installed by an electrician;</li> <li>additional charges for modifications or for special orders</li> </ul>					


- lead time between 8-9 weeks
  dimensions are approximate and may vary slightly

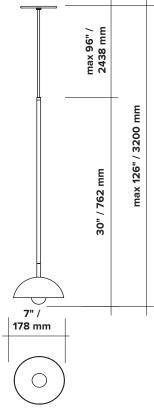

## lambert&fils

### **ORDER GUIDE: SKU**

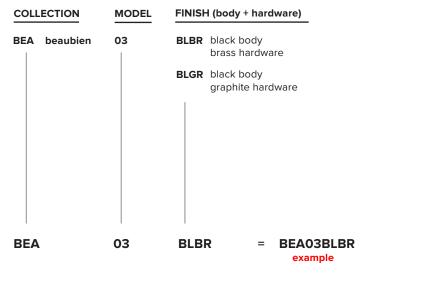



FINISH




## lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS

#### **G9 SOCKETS**

SPHERES



+ 🗖 +

Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty

G50 Ø ±2" / 50 mm

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.