

lambert&fils

CLARK SUSPENSION



type	suspension				
materials	shade :	brass (BR) or powdercoated aluminium (BL/WH)			
	lamp holder cover : lamp tube : cable : wire: canopy:	marble / aluminium frosted glass, Ø 2-1/4" / 57 mm aircraft steel cables nylon/polyester powdercoated steel (WH)			
wire length	96" / 2438 mm				
light bulb	AC LED board (included), 27 W (A) AC LED board (included), 68 W (B)				
voltage	120V / 240V				
dimmer	refer to our recommended list of dimmer models				
notes	 must be installed by an electrician additional charges for modifications or for special orders lead time between 7-9 weeks dimensions are approximate and may vary slightly 				

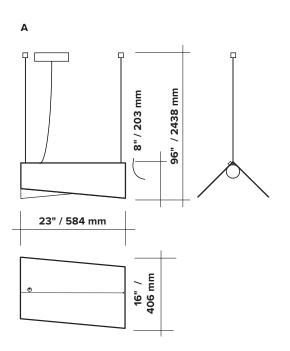

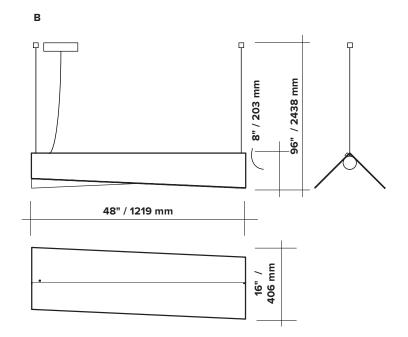

lambert&fils

ORDER GUIDE: SKU





lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

AC LED BOARD - SIZE A

27 W 100V-120V / 240V 100 Lumens / inches LED 2700K 50 000 H CRI ≥90 2 years warranty 3 SDCM consistency

AC LED BOARD - SIZE B

68 W 100V-120V / 240V 100 Lumens / inches LED 2700K 50 000 H CRI ≥90 2 years warranty 3 SDCM consistency

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.