# lambert&fils

## **DOT WALL**



type wall

materials body: brass (BR) or

powdercoated steel and

aluminium (BL/WH)

sphere: milk glass (G50)

wire: vinyl

wire length 96" / 2438 mm

(softwire) switch positionned at 18"/457 mm from body

**weight** 1.5 lb / 0.7 kg

light bulb LED (included), 3,5W

sockets G9

**voltage** 120V / 240V

**dimmer** For hardwire installation only

refer to our recommended list of dimmer models

certifications CE


**notes** — must be installed by an electrician


– lead time between 8-9 weeks

dimensions are approximate and may vary slightly


### **HARDWIRE**

# SOFTWIRE

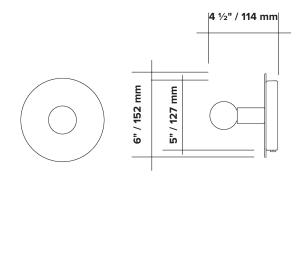

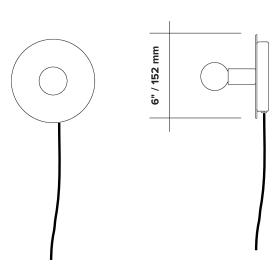

# lambert&fils

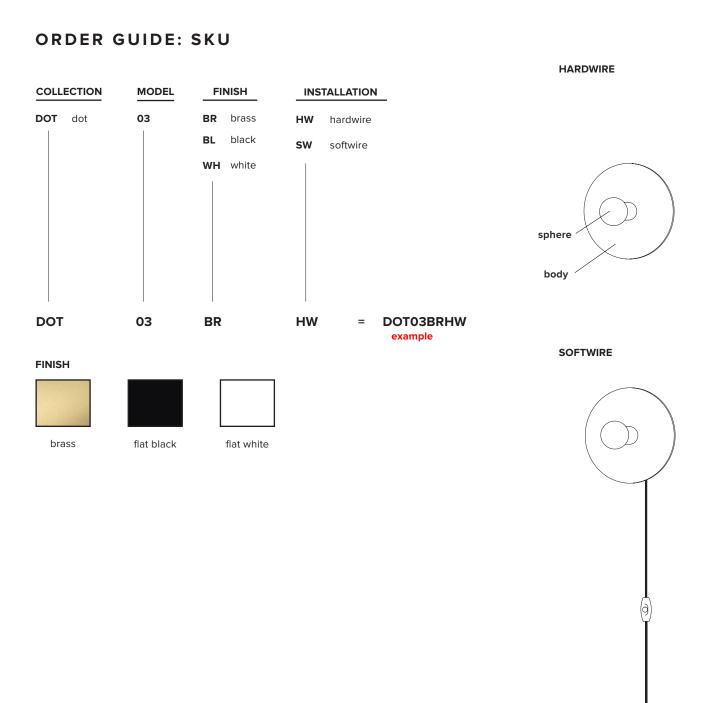

# lambert&fils

# LIGHT BULB & DIMMER SPECIFICATIONS

# G9 SOCKETS Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty C€

### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.