


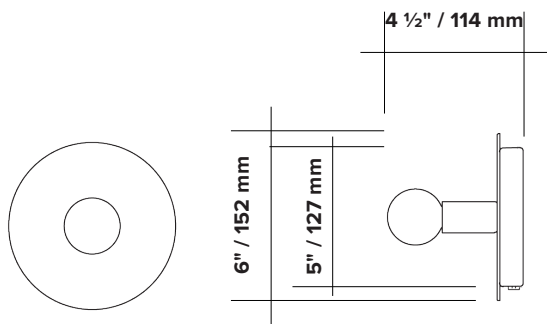


DOT WALL




type	wall	
materials	body :	brass (BR) or powdercoated steel and aluminium (BL/WH)
	sphere :	milk glass (G50)
	wire :	vinyl
wire length (softwire)	96" / 2438 mm switch positionned at 18"/457 mm from body	
weight	1.5 lb / 0.7 kg	
light bulb	LED (included), 3,5W	
sockets	G9	
voltage	120V / 240V	
dimmer	For hardwire installation only refer to our recommended list of dimmer models	
certifications	  	
notes	<ul style="list-style-type: none"> - must be installed by an electrician - lead time between 8-9 weeks - dimensions are approximate and may vary slightly 	

HARDWIRE



SOFTWIRE

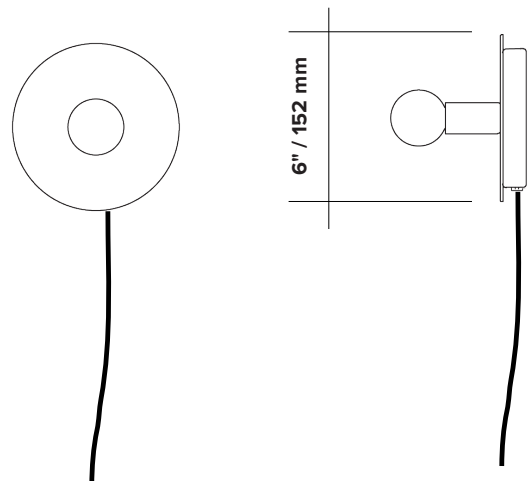


ORDER GUIDE: SKU

<u>COLLECTION</u>	<u>MODEL</u>	<u>FINISH</u>	<u>INSTALLATION</u>
DOT dot	03	BR brass BL black WH white	HW hardwire SW softwire
DOT	03	BR	HW

= **DOT03BRHW**
example

FINISH



brass




black




white

HARDWIRE




SOFTWIRE

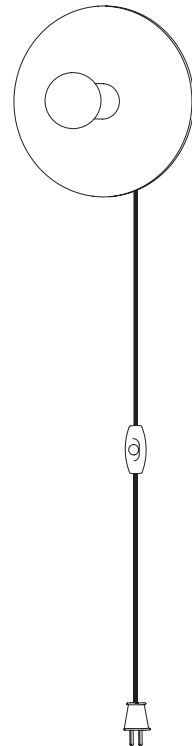

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS



Frosted
3.5W
100V-120V / 240V
350 Lumens
2700 K
25 000 H
CRI ≥80
2 years warranty



SPHERES



G100 $\varnothing \pm 4" / 100 \text{ mm}$



G80 $\varnothing \pm 3" / 80 \text{ mm}$



G60 $\varnothing \pm 2" / 60 \text{ mm}$



G50 $\varnothing \pm 2" / 50 \text{ mm}$



tube $\varnothing 1" / 27 \text{ mm}$
length $\pm 2" / 60 \text{ mm}$

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MAX LEVEL</u>	<u>MIN LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.