

lambert&fils

DOT - ANTIPODE



type	suspension						
materials	body : spheres : hardware :	brass milk glass (G50 + G100) brass					
height	8 ½" 14 ½" 216 mm 368 mm	20 ½" 26 ½" 38 ½" 521 mm 673 mm 978 mm					
weight	min. 2 lb / 0.9 kg - max. 2.5 lb / 1.1 kg						
light bulb	LED (included), 1x 4.5W + 1x 3.5W						
sockets	G9						
voltage	120V / 240V						
dimmer	refer to our recommended list of dimmer models						
certifications	°∰s C€⊕						
notes	 must be installed by an electrician; additional charges for modifications or for special orders; lead time between 8-9 weeks; dimensions are approximate and may vary slightly. 						

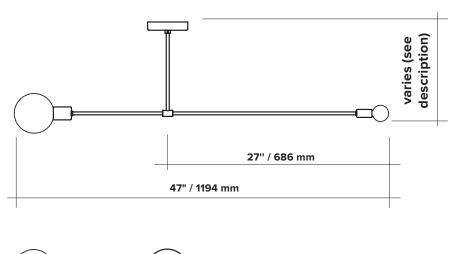






lambert&fils

ORDER GUIDE: SKU

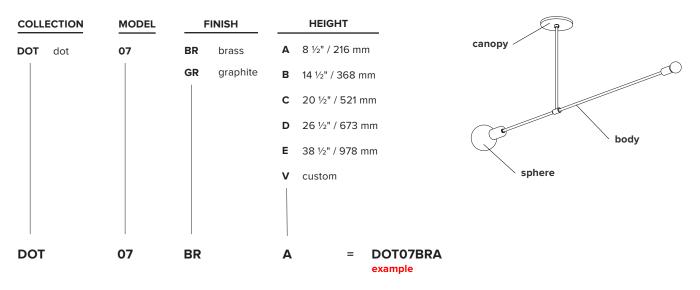

FINISH



brass

graphite


CANOPY swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS

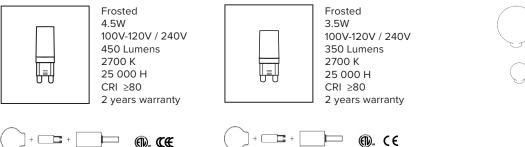

SPHERES



DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL		FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.