# lambert&fils

## DOT - LINE WALL



type	wall					
materials	body : hardware : sphere : canopy :	brass (BR) or powder coated aluminium (BL/WH) brass milk glass (G50) brass (BR) or				
wire length	wire :	powder coated steel (BL/WH) nylon (SW only)				
weight	1.8 lb / 0.8 kg					
light bulb	LED (included), 5x 3,5W					
sockets	G9					
voltage	120V / 240V					
dimmer	hardwire installation only refer to our recommended list of dimmer models					
certifications	e∰w C € ⊕					
notes	<ul> <li>must be installed by an electrician (HW)</li> <li>canopy position must be determined by client</li> <li>lead time between 8-9 weeks</li> <li>dimensions are approximate and may vary slightly</li> </ul>					


HARDWIRE




## lambert&fils



HARDWIRE

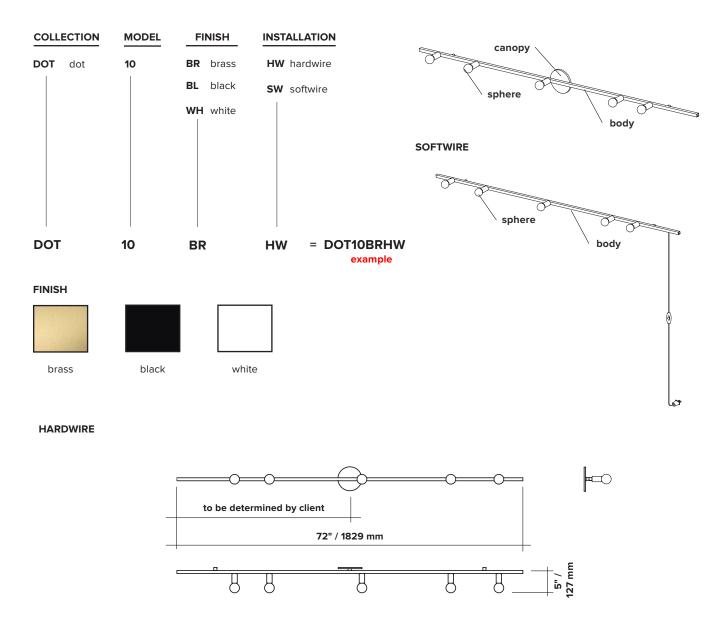

SOFTWIRE

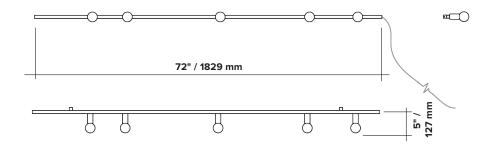

## lambert&fils

## LIGHT BULB & DIMMER SPECIFICATIONS

#### **G9 SOCKETS**

#### SPHERES



### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

\*Other dimmers can yield good results and we recommand conducting your own test before final installation.