
lambert&fils

MILE 02

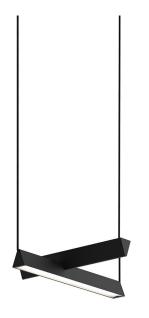

type: suspension

materials: body: powder coated aluminum

lens: frosted polycarbonate hardware: powder coated aluminum

wire: polyester

wire length: 108" live wire feed

84" unloaded wire

weight: 3.9 lb / 1.8 kg

light source: 47W

(see light source section for specifications)

voltage: 120V / 240V

dimmer: refer to our recommended list of dimmer models

certifications: $\mathbb{Q}_{uste} \subset \mathbb{Q}_{us} \subset \mathbb{Q}_{us}$

notes: – must be installed by an electrician


– additional charges for modifications


or for special orders

– dimensions are approximate and may

vary slightly


- lead time 12 weeks

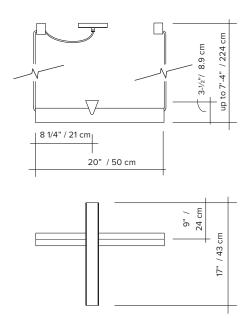





lambert&fils

ORDER GUIDE: SKU

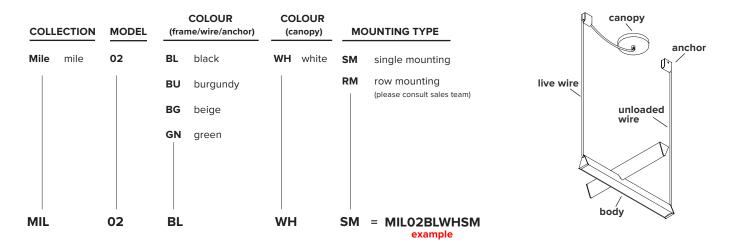


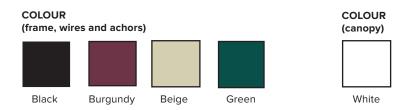

MOUNTING TYPE

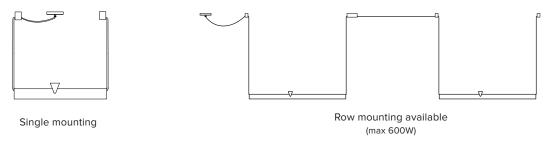

ANCHORS



Updated: July 2018

lambert&fils

LIGHT SOURCE & DIMMER SPECIFICATIONS

AC LED BOARD

47 W
100V-120V / 240V
uplight 1040 lumens
downlight 1430 lumens
LED 2700K
50 000 H
CRI ≥90
2 years warranty
3 SDCM consistency
Replacement parts available through Lambert & Fils

DIMMER LIST COMPATIBILITY - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.