# lambert&fils

## MILE 03



**type:** suspension

materials: body: powder coated aluminum

lens: frosted polycarbonate

hardware: powder coated aluminum & steel

wire: polyester

wire length: 108" live wire feed

84" unloaded wire

**weight:** 5.5 lb / 2.5 kg

light source: 88W

(see light source section for specifications)

voltage: 120V / 240V

dimmer: refer to our recommended list of dimmer models

certifications: c⊕uste C €⊕


**notes:** – must be installed by an electrician

– additional charges for modifications

or for special orders


dimensions are approximate and may vary slightly

– lead time 7-9 weeks

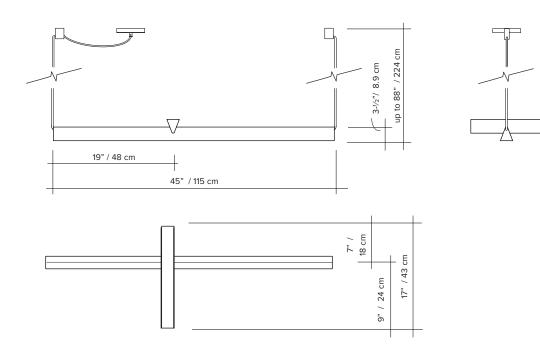


# lambert&fils

## **ORDER GUIDE: SKU**

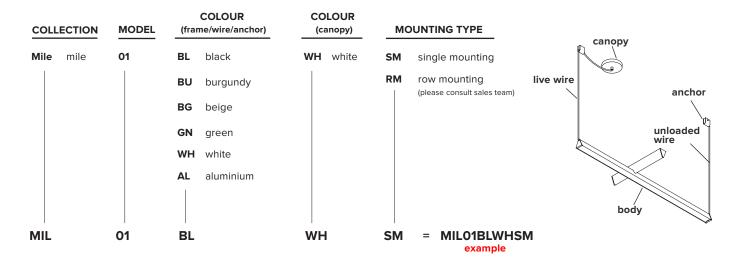




#### **MOUNTING TYPE**

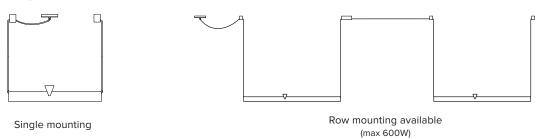


#### **ANCHORS**



# lambert&fils

### LIGHT SOURCE & DIMMER SPECIFICATIONS

#### **AC LED BOARD**



88 W
100V-120V / 240V
uplight 1040 lumens
downlight 2860 lumens
LED 2700K
50 000 H
CRI ≥90
2 years warranty
3 SDCM consistency

Replacement parts available through Lambert & Fils

### **DIMMER LIST COMPATIBILITY - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

 $<sup>^{*}</sup>$ Other dimmers can yield good results and we recommand conducting your own test before final installation.