
lambert&fils


BEAUBIEN 06




Туре	Suspension					
Materials	Body: Hardware: Sphere: Canopy:	powder coated aluminium or brass brass milk glass (G50-G80) powder coated steel or brass				
Total Height	Height to be specified upon order					
Weight	12lb / 5.4kg					
Light Bulb	LED (included), 2 x 4.5W + 8 x 3.5W					
Sockets	G9					
Voltage	120V / 240V					
Dimmer	Refer to our recommended list of dimmer models					
Certifications	ten C€ ⊕.					
Notes	 Must be installed by an electrician Additional charges for modifications Lead time between 10–12 weeks Dimensions are approximate and may vary clightly. 					

 $\boldsymbol{\cdot}$ Dimensions are approximate and may vary slightly

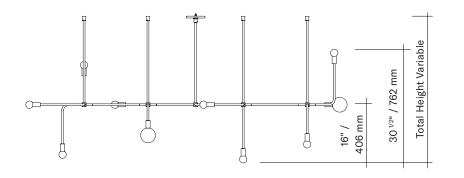





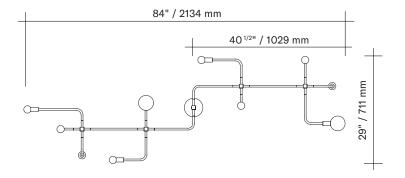

lambert&fils

ORDER GUIDE: SKU

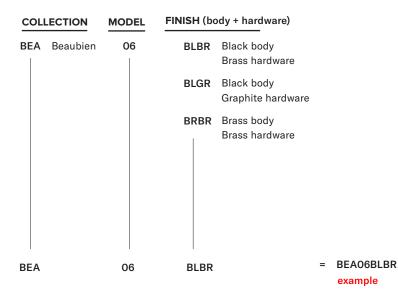



Finish







Graphite

Brass

Flat black

Canopy


Swivel option for slanted ceiling



lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS

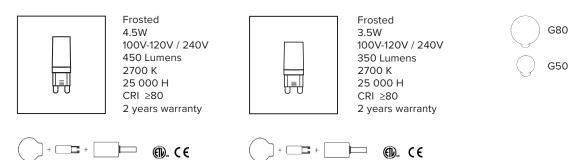

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

SPHERES

Ø ±3"/80 mm

Ø ±2"/50 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	100%	2%	no	very good
LEGRAND - NILOÉ	3 996 35	87%	15%	no	good
NIKO	310-0280X	94%	5%	no	very good
NIKO	310-0190X	100%	1%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.