








## CLARK SUSPENSION

The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

- type:** suspension
- construction:** polished brass or powder coated aluminium shade  
milk polycarbonate diffuser with marble endcap  
polyester cord
- specifications:** source: LED array, integrated  
colour temperature: 2700K, 3000K  
colour rendering index: ≥90 CRI  
colour consistency: 3 SDCM  
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V: On/Off, Phase Dimming, DALI  
refer to our recommended list of dimmer models
- cord length:** 96" / 244 cm
- certifications:**     IP20
- warranty:** 2 years

	length	power consumption	lumen output (2700K) brass / black / white	weight aluminium // brass
<b>B</b>	24" / 61 cm	15.4W	940 / 629 / 960lm	3.6lbs / 1.63kg // 11.28lbs / 5.12kg
<b>D</b>	46.25" / 117.5cm	30W	1880 / 1256 / 1920lm	6.94lbs / 3.15kg // 21.75lbs / 9.87kg
<b>F</b>	68.35" / 174 cm	45W	2820 / 1884 / 2880lm	10.25lbs / 4.65kg // 32.10lbs / 13.56kg


### model D

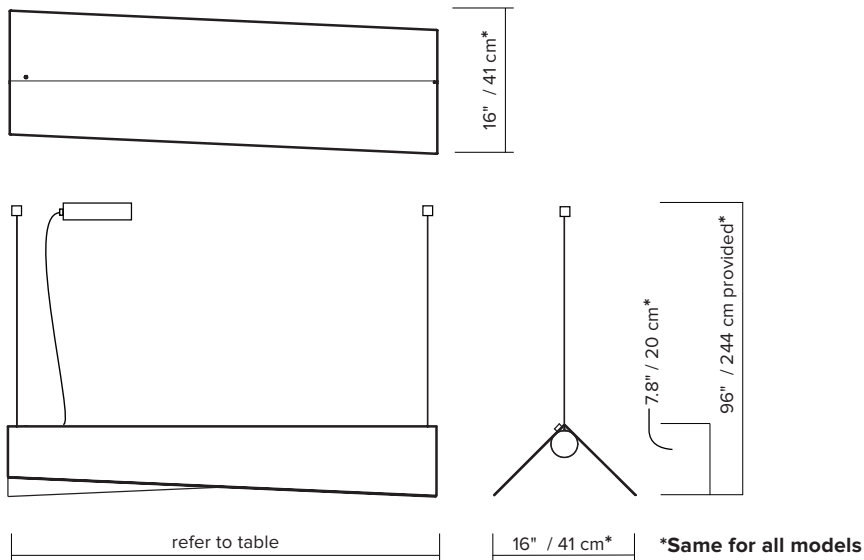

\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	LENGTH*	SHADE	CORD
CLA clark	02	B 24"	BR brass	BK black
		D 46.3"	BK black	WH white
		F 68.4"	WH white	
		*other sizes available upon request		
CLA	02	B	BR	BK

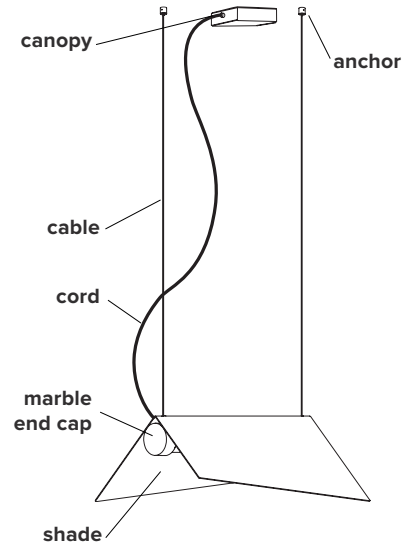

CANOPY AND ANCHORS	COLOUR TEMPERATURE (CCT)	DIMMING
BK black	WL warm light (2700K)	ZT 0-10V dimming (120V only)
WH white	NL neutral light (3000K)	PH phase dimming
	D27 dim to warm (2700K-2200K)	DA DALI (220-240V only)
	D30 dim to warm (3000K-2200K)	
	CCT other CCT available upon request *	
BK	WL	ZT = <b>CLA02BBRBKWKWLZT</b> example

\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### FINISH



textured black



textured white



brass

### CORD



black



white

### END CAP



marble

### NOTES:

- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Lutron	DVELV303P	100%	9%	Phase Cut
Lutron	MAELV600	100%	3%	Phase Cut
Lutron	SELV300P	100%	9%	Phase Cut
Lutron	CTELV-303P	100%	5%	Phase Cut
Lutron	CTRP-253P	100%	5%	Phase Cut
Lutron	PD-5NE	100%	7%	Phase Cut
Lutron	DVRP-253P	100%	5%	Phase Cut
Lutron	MA-PRO	100%	6%	Phase Cut
Lutron	NTRP-250	100%	8%	Phase Cut
Lutron	NTELV-300	100%	9%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

#### Clark B

Dimmer brand	Model	Max level	Min level	Dimming Protocol
BerKer	283010	100%	6.2%	Phase Cut
Busch-Jaeger	6523U	100%	0.6%	Phase Cut
CLIPSAL	32E450LM	100%	5.4%	Phase Cut
CLIPSAL	32E450TM	100%	5.3%	Phase Cut
CLIPSAL	32E450UDM	100%	6.3%	Phase Cut
Diginet	MEDM	100%	0.0%	Phase Cut
Diginet	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	1.6%	Phase Cut
Finder	15.91.8	100%	6.1%	Phase Cut
Gira	117600/101	100%	9.1%	Phase Cut
Hager	EVN011	100%	3.1%	Phase Cut
Hager	EVN012	100%	3.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300.RC	100%	8.0%	Phase Cut

#### Clark D

Dimmer brand	Model	Max level	Min level	Dimming Protocol
CLIPSAL	32E450TM	100%	1.4%	Phase Cut
CLIPSAL	32E450UDM	100%	2.0%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.1%	Phase Cut
ELKO	316GLED	100%	8.8%	Phase Cut
GIRA	117600/101	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300.RC	100%	2.5%	Phase Cut

#### Clark F

Dimmer brand	Model	Max level	Min level	Dimming Protocol
CLIPSAL	32E450TM	100%	1.9%	Phase Cut
CLIPSAL	32E450UDM	100%	2.4%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.3%	Phase Cut
ELKO	316GLED	100%	2.2%	Phase Cut
GIRA	117600/101	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300.RC	100%	2.3 %	Phase Cut


Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue. We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.


## EU ENERGY LABEL

**lambert&fils** CLARK 02B


 This luminaire contains build-in LED lamps:

A++ } LED  
A+ }  
A }  
~~B }  
C }  
D }  
E }~~

The lamps cannot be changed in the luminaire.


874/2012 

**lambert&fils** CLARK 02D


 This luminaire contains build-in LED lamps:

A++ } LED  
A+ }  
A }  
~~B }  
C }  
D }  
E }~~

The lamps cannot be changed in the luminaire.

874/2012 

**lambert&fils** CLARK 02F

 This luminaire contains build-in LED lamps:

A++ } LED  
A+ }  
A }  
~~B }  
C }  
D }  
E }~~

The lamps cannot be changed in the luminaire.

874/2012 