






CLARK SUSPENSION




The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

TYPE	Suspension
CONSTRUCTION	Polished brass or powder coated aluminium shade milk polycarbonate diffuser with marble endcap polyester cord
SPECIFICATIONS	Source: LED array, integrated Power consumption: D: 30W, F: 45W Lumen output 2700K : brass / black / white D: 1880 / 1256 / 1920lm F: 2820 / 1884 / 2880lm Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
CONTROL	120/277V on/off, 0-10V or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models
CORD LENGTH	120"/ 304 cm
STAINLESS STEEL CABLE	96"/ 244cm
WEIGHT	Brass: Powder coated aluminum: D: 6.94lbs / 3.15kg D: 10.25lbs / 4.65kg F: 32.10lbs / 13.56kg F: 10.25lbs / 4.65kg
CERTIFICATIONS	     IP20
WARRANTY	2 years


NOTES

- Luminaire total height (ceiling to lowest point of luminaire). (96" / 244 cm aircraft cables provided)
Min - 14" / 36 cm
Max - 104" / 264 cm (96" aircraft cables provided)
*For any height outside these parameters, contact Lambert & Fils
- Luminaire height is adjustable on site
- Luminaire can be installed on a slanted ceiling - 45° or less, contact Lambert & Fils
- Dimensions are approximate and may vary slightly

Model D

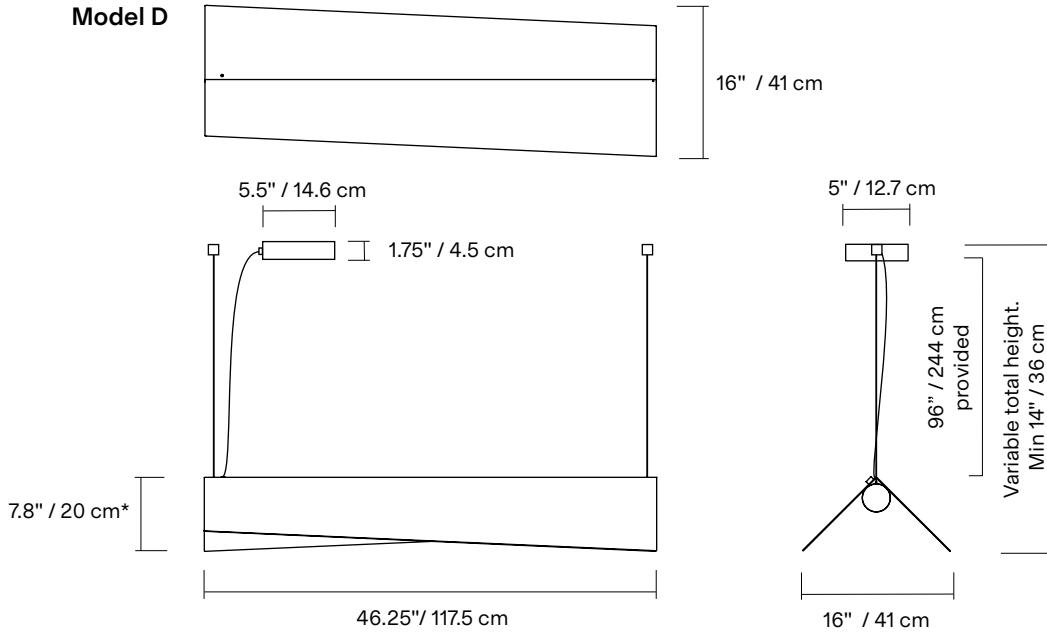

Model F

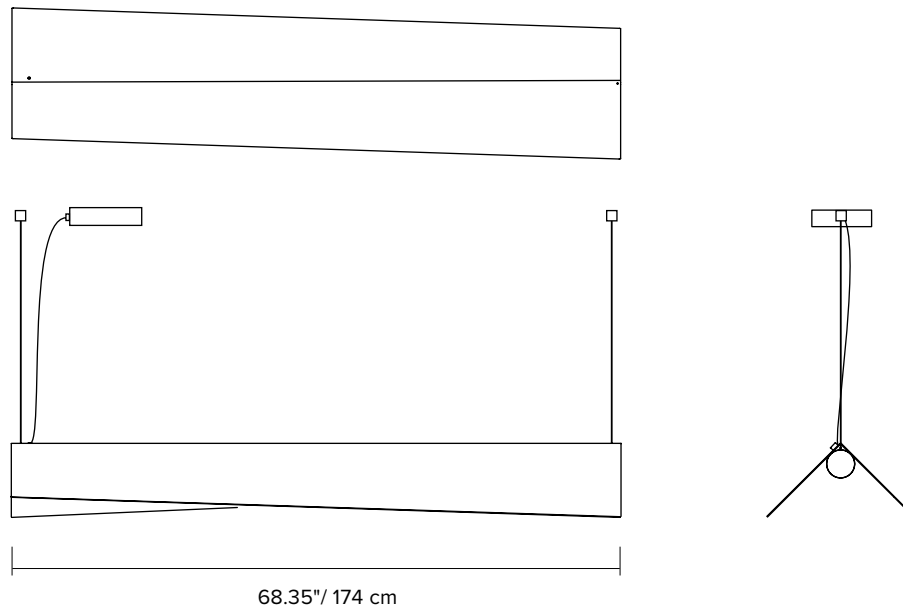

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White

CORD



BK
Black



WH
White


END CAP



Marble

ANCHORS


Swivel option available for slanted ceilings (45 ° max angle)



NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on website for cleaning instructions

LAMP ANATOMY

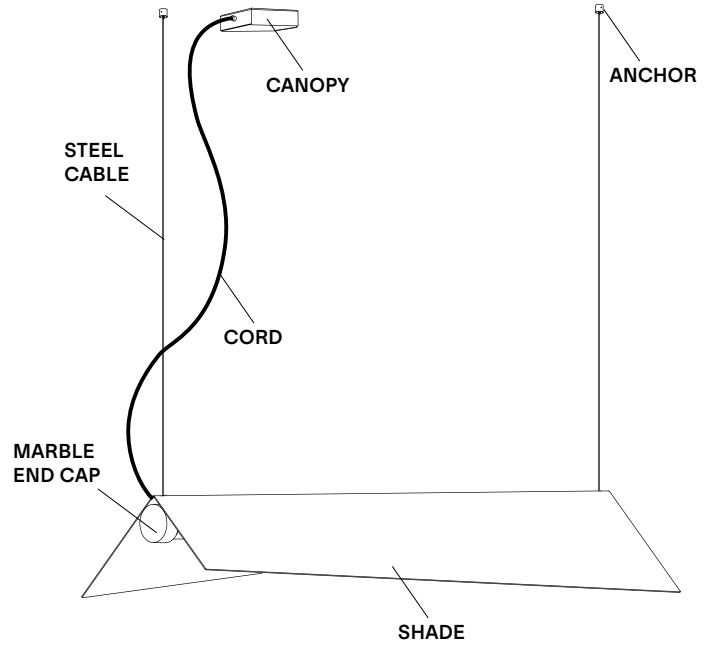

		Example	Fill with your selection
COLLECTION	CLA Clark	CLA	CLA
MODEL	02	02	02
LENGTH*	D 46.3" F 68.4"	D	
SHADE	BR Brass BK Textured black WH Textured white	BR	
CORD	BK Black WH White	BK	
CANOPY AND ANCHORS	BK Textured black WH Textured white	BK	
COLOUR TEMPERATURE (CCT)	WL Warm light (2700K) NL Neutral light (3000K) D27 Dim to warm (2700K-2200K) D30 Dim to warm (3000K-2200K) CCT Other CCT available upon request**	WL	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming DA DALI (220-240VAC only)	ZT	
FULL SKU		CLA02DBRBKWBKWLZT	
NOTES			

*Other sizes available upon request.

**Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively.
Not available with Dim-to-Warm feature.

TESTED DIMMER COMPATIBILITY LIST - 120V*

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON	DVELV303P	100%	9%	Phase Cut
LUTRON	MAELV600	100%	3%	Phase Cut
LUTRON	SELV300P	100%	9%	Phase Cut
LUTRON	CTELV-303P	100%	5%	Phase Cut
LUTRON	CTRP-253P	100%	5%	Phase Cut
LUTRON	PD-5NE	100%	7%	Phase Cut
LUTRON	DVRP-253P	100%	5%	Phase Cut
LUTRON	MA-PRO	100%	6%	Phase Cut
LUTRON	NTRP-250	100%	8%	Phase Cut
LUTRON	NTELV-300	100%	9%	Phase Cut

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase cut dimming (leading edge or trailing edge**)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
CLIPSAL	32E450TM	100%	1.4 - 1.9%	Phase Cut
CLIPSAL	32E450UDM	100%	2.0 - 2.4%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.1 - 0.3%	Phase Cut
ELKO	316GLED	100%	2.2 - 8.8%	Phase Cut
GIRA	117600/101	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300.RC	100%	2.3 - 2.5%	Phase Cut

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.