






# CLARK SUSPENSION




The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

<b>TYPE</b>	Suspension
<b>CONSTRUCTION</b>	Polished brass or powder coated aluminium shade milk polycarbonate diffuser with marble endcap polyester cord
<b>SPECIFICATIONS</b>	Source: LED array, integrated Power consumption: <b>D:</b> 30W, <b>F:</b> 45W Lumen output 2700K : brass / black / white <b>D:</b> 1880 / 1256 / 1920lm <b>F:</b> 2820 / 1884 / 2880lm  Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V or phase dimming (120V only) 220-240V: On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models
<b>CORD LENGTH</b>	120"/ 304 cm
<b>STAINLESS STEEL CABLE</b>	96"/ 244cm
<b>WEIGHT</b>	Brass: Powder coated aluminum: <b>D:</b> 6.94lbs / 3.15kg <b>D:</b> 10.25lbs / 4.65kg <b>F:</b> 32.10lbs / 13.56kg <b>F:</b> 10.25lbs / 4.65kg
<b>CERTIFICATIONS</b>	     IP20
<b>WARRANTY</b>	2 years


## NOTES

- Luminaire total height (ceiling to lowest point of luminaire). 96" / 244 cm aircraft cables provided  
 Min - 14" / 36 cm  
 Max - 104" / 264 cm (96" aircraft cables provided)  
 \*For any height outside these parameters, contact Lambert & Fils
- Luminaire height is adjustable on site
- Luminaire can be installed on a slanted ceiling - 45° or less, contact Lambert & Fils
- Dimensions are approximate and may vary slightly

**Model D**

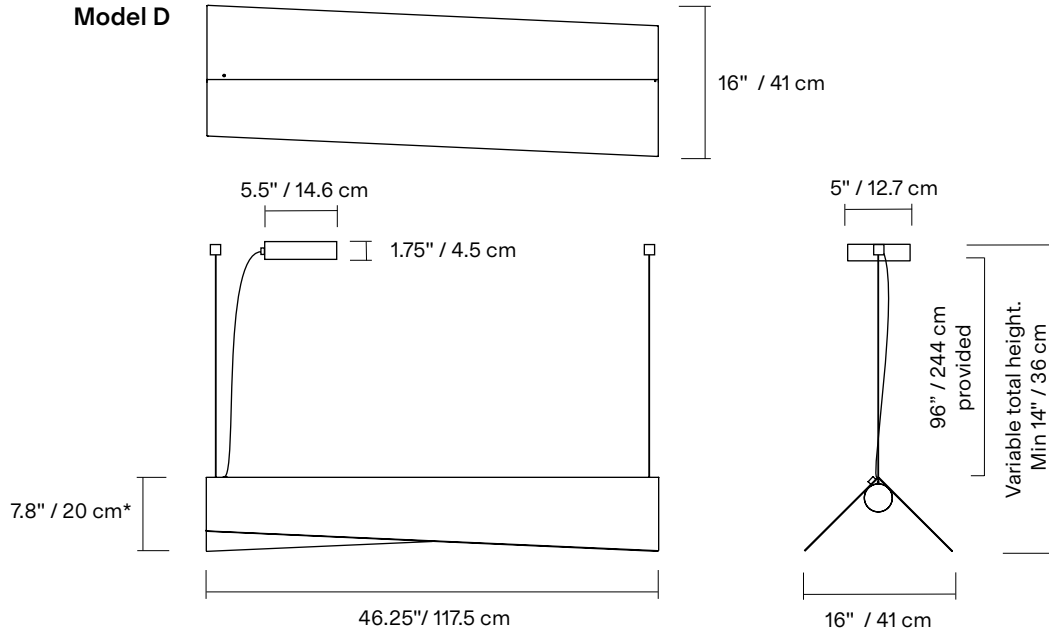

**Model F**

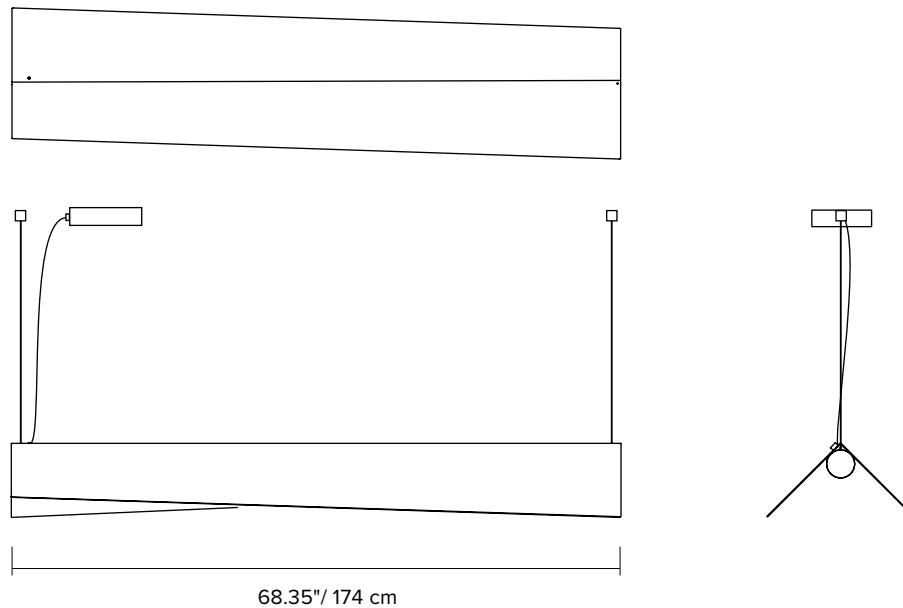

## FINISH



**BR**  
Brass



**BK**  
Textured  
Black



**WH**  
Textured  
White

## CORD



**BK**  
Black



**WH**  
White


## END CAP



Marble

## ANCHORS


Swivel option available for slanted ceilings (45 ° max angle)



## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on website for cleaning instructions

## LAMP ANATOMY

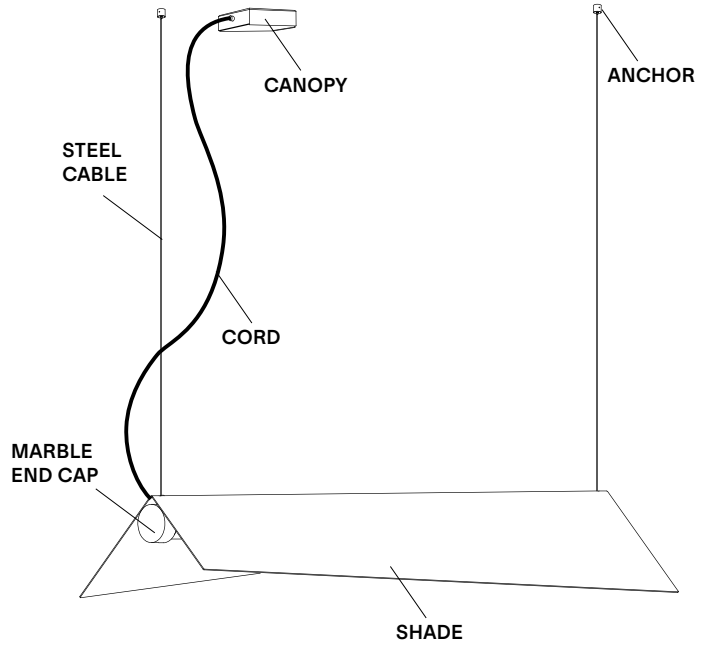

		Example	Fill with your selection
<b>COLLECTION</b>	<b>CLA</b> Clark	<b>CLA</b>	<b>CLA</b>
<b>MODEL</b>	<b>02</b>	<b>02</b>	<b>02</b>
<b>LENGTH*</b>	<b>D</b> 46.3" <b>F</b> 68.4"	<b>D</b>	
<b>SHADE</b>	<b>BR</b> Brass <b>BK</b> Textured black <b>WH</b> Textured white	<b>BR</b>	
<b>CORD</b>	<b>BK</b> Black <b>WH</b> White	<b>BK</b>	
<b>CANOPY AND ANCHORS</b>	<b>BK</b> Textured black <b>WH</b> Textured white	<b>BK</b>	
<b>COLOUR TEMPERATURE (CCT)</b>	<b>WL</b> Warm light (2700K) <b>NL</b> Neutral light (3000K) <b>D27</b> Dim to warm (2700K-2200K) <b>D30</b> Dim to warm (3000K-2200K) <b>CCT</b> Other CCT available upon request**	<b>WL</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming <b>DA</b> DALI (220-240VAC only)	<b>ZT</b>	
<b>FULL SKU</b>		<b>CLA02DBRBKWBKWLZT</b>	
		<b>NOTES</b>	

\*Other sizes available upon request.

\*\*Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively.  
Not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON	DVELV303P	100%	9%	Phase Cut
LUTRON	MAELV600	100%	3%	Phase Cut
LUTRON	SELV300P	100%	9%	Phase Cut
LUTRON	CTELV-303P	100%	5%	Phase Cut
LUTRON	CTRP-253P	100%	5%	Phase Cut
LUTRON	PD-5NE	100%	7%	Phase Cut
LUTRON	DVRP-253P	100%	5%	Phase Cut
LUTRON	MA-PRO	100%	6%	Phase Cut
LUTRON	NTRP-250	100%	8%	Phase Cut
LUTRON	NTELV-300	100%	9%	Phase Cut

## TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
CLIPSAL	32E450TM	100%	1.4 - 1.9%	Phase Cut
CLIPSAL	32E450UDM	100%	2.0 - 2.4%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.1 - 0.3%	Phase Cut
ELKO	316GLED	100%	2.2 - 8.8%	Phase Cut
GIRA	117600/101	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300.RC	100%	2.3 - 2.5%	Phase Cut

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.