# lambert&fils

### **CLARK SUSPENSION**



**type** suspension

materials shade: brass (BR) or

powdercoated aluminium (BL/WH)

lamp holder

cover: marble / aluminium

lamp tube: frosted glass, Ø 2-1/4" / 57 mm

cable: aircraft steel cables wire: nylon/polyester

canopy: powdercoated steel (WH)

wire length 96" / 2438 mm

light bulb AC LED board (included), 27 W (A)

AC LED board (included), 68 W (B)

voltage 120V / 240V

**dimmer** refer to our recommended list of dimmer models


**notes** – must be installed by an electrician

- additional charges for modifications or for

special orders


– lead time between 7-9 weeks


 $\boldsymbol{\mathsf{-}}$  dimensions are approximate and may vary slightly

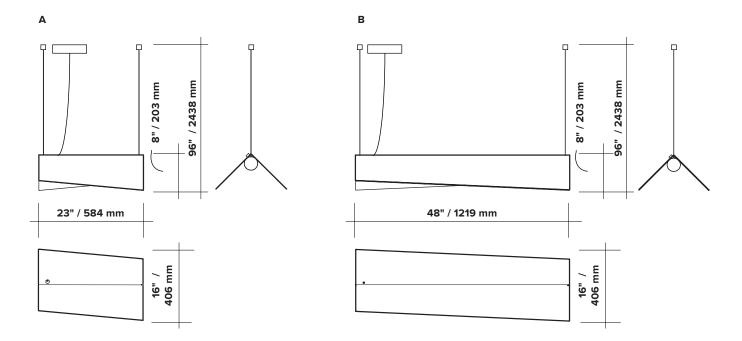

# lambert&fils

## **ORDER GUIDE: SKU**

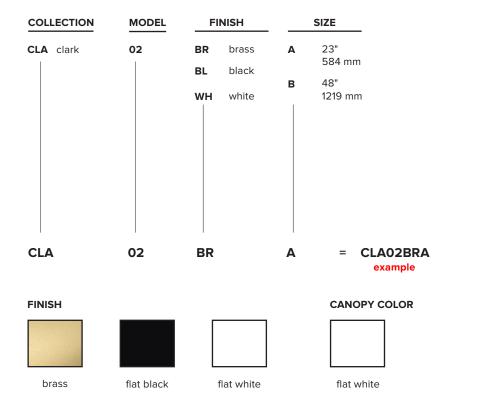





## lambert&fils

### LIGHT BULB & DIMMER SPECIFICATIONS

#### **AC LED BOARD - SIZE A**

#### **AC LED BOARD - SIZE B**





#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

#### **DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V**

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.