



CLARK SUSPENSION

The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

- type:





suspension
- construction:

polished brass or powder coated aluminium shade
milk polycarbonate diffuser with marble endcap
polyester cord
- specifications:

source: LED array, integrated
colour temperature: 2700K, 3000K,
dim to warm (2700k to 2200k)
colour rendering index: ≥90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h
- control:

120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
- cord length:


96" / 120 cm
- certifications:

    IP20
- warranty:

2 years

	length	power consumption	lumen output brass / black / white	weight
				aluminium // brass
B	24" / 61 cm	15.4W	940 / 629 / 960lm	3.6lbs / 1.63kg // 11.28lbs / 5.12kg
D	46.25" / 117.5cm	30W	1880 / 1256 / 1920lm	6.94lbs / 3.15kg // 21.75lbs / 9.87kg
F	68.35" / 174 cm	45W	2820 / 1884 / 2880lm	10.25lbs / 4.65kg // 32.10lbs / 13.56kg

model D

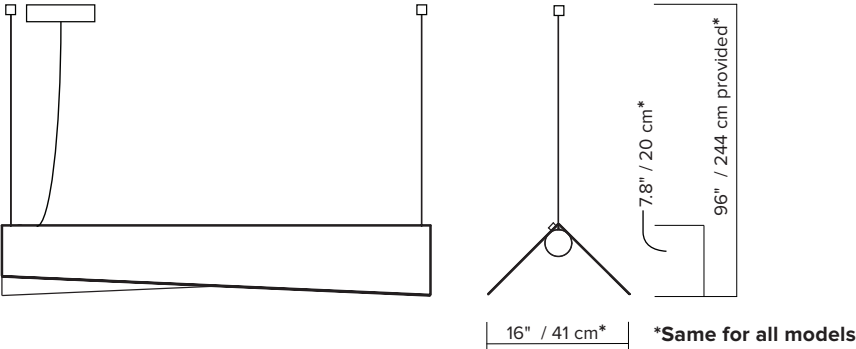

refer to table




*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU


COLLECTION	MODEL	LENGTH*	SHADE	CORD
CLA clark	02	B 24"	BR brass	BK black
		D 46.3"	BK black	WH white
		F 68.4"	WH white	
		*other sizes available upon request		
CLA	02	B	BR	BK

CANOPY AND ANCHORS	COLOUR TEMPERATURE (CCT)	DIMMING
BK black	WL warm light (2700K)	ZT 0-10V dimming
WH white	NL neutral light (3000K)	OT 1-10V dimming
	DW dim to warm (2700K to 2200K)	PH phase dimming
	V variable	
BR	WL	ZT

= CLAO2BBRBKBKWLZT
 example

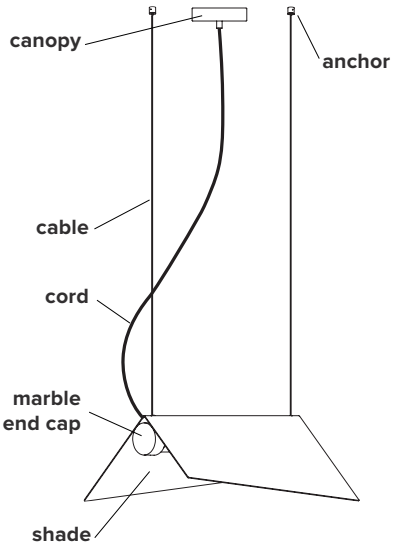

FINISH



flat black flat white brass

CORD



black white

END CAP



marble

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer Brand	Dimmer Model	Dimmer protocol	Min level	Max level
Leviton	VPE06	Phase dimming	9%	100%
Lutron	DVELV303P	Phase dimming	5%	100%
Lutron	SELV300P	Phase dimming	6%	100%
Lightolier	ZP260QEW	Phase dimming	9%	100%
Lutron	FAELV500	Phase dimming	12%	100%
Lutron	MAELV600	Phase dimming	11%	100%
Leviton	IPE04	Phase dimming	5%	100%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)

Dimmer Brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	23%	100%
Clipsal	32E450TM	Phase dimming	19%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

