








CLARK SUSPENSION

The Clark Collection pushes the limits of form without sacrificing functionality. Cut and bent metal create shades that both block and reflect the lamp's light source, casting an even wash of light on any surface. Marble is used not only to anchor the lamps, but also to provide a contemporary touch to its surrounding environment. The rich materials and subtle used of angles in these lamps seamlessly blend elegance and playfulness.

- type:** suspension
- construction:** polished brass or powder coated aluminium shade
milk polycarbonate diffuser with marble endcap
polyester cord
- specifications:** source: LED array, integrated
colour temperature: 2700K, 3000K,
dim to warm (2700k to 2200k)
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
- cord length:** 96" / 244 cm
- certifications:**     IP20
- warranty:** 2 years


	length	power consumption	lumen output brass / black / white	weight aluminium // brass
B	24" / 61 cm	15.4W	940 / 629 / 960lm	3.6lbs / 1.63kg // 11.28lbs / 5.12kg
D	46.25" / 117.5cm	30W	1880 / 1256 / 1920lm	6.94lbs / 3.15kg // 21.75lbs / 9.87kg
F	68.35" / 174 cm	45W	2820 / 1884 / 2880lm	10.25lbs / 4.65kg // 32.10lbs / 13.56kg

model D

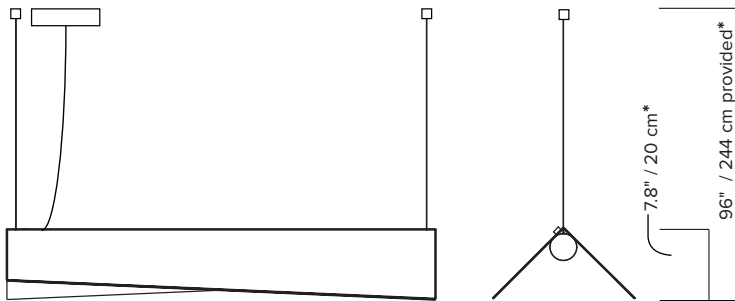

16" / 41 cm* *Same for all models


refer to table

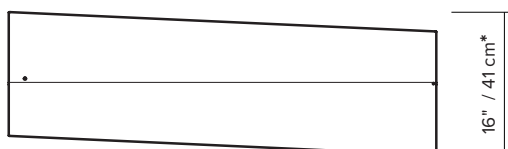







ORDER GUIDE: SKU

COLLECTION	MODEL	LENGTH*	SHADE	CORD
CLA clark	O2	B 24"	BR brass	BK black
		D 46.3"	BK black	WH white
		F 68.4"	WH white	
		*other sizes available upon request		
CLA	O2	B	BR	BK

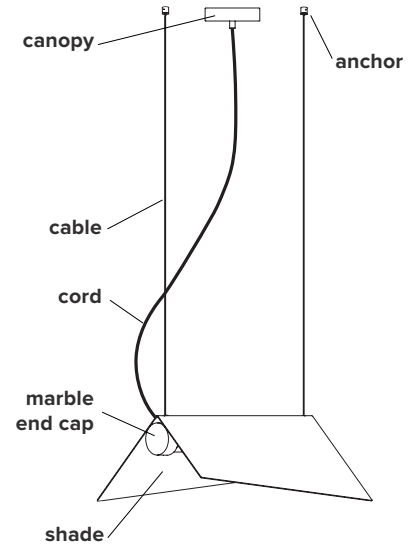CANOPY AND ANCHORS	COLOUR TEMPERATURE (CCT)	DIMMING
BK black	WL warm light (2700K)	ZT 0-10V dimming
WH white	NL neutral light (3000K)	OT 1-10V dimming
	D27 dim to warm (2700K to 2200K)	PH phase dimming
	D30 dim to warm (3000K to 2200K)	
	V variable	
BR	WL	ZT = CLA02BBRBKBRWLZT example



FINISH	CORD	END CAP
 flat black	 black	 marble
 flat white	 white	
 brass		

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer Brand	Dimmer Model	Dimmer protocol	Min level	Max level
Leviton	VPE06	Phase dimming	9%	100%
Lutron	DVELV303P	Phase dimming	5%	100%
Lutron	SELV300P	Phase dimming	6%	100%
Lightolier	ZP260QEW	Phase dimming	9%	100%
Lutron	FAELV500	Phase dimming	12%	100%
Lutron	MAELV600	Phase dimming	11%	100%
Leviton	IPE04	Phase dimming	5%	100%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 0-10V, Phase dimming (trailing edge only**)

Dimmer Brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	23%	100%
Clipsal	32E450TM	Phase dimming	19%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

