

DOT WALL









SOFTWIRE




HARDWIRE


The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

| | |
|----------------|--|
| TYPE | Wall - softwire (SW) or hardwire (HW) |
| CONSTRUCTION | Brass or powder coated steel and brass body Milk glass globes Polyester cord (SW) |
| SPECIFICATIONS | Source: LED lamp provided (G9 base) Power consumption: 3.5W Lumen output: 289lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: $\geq 15\ 000$ h |
| CONTROL | Refer to our recommended list of dimmer models (HW) |
| CORD LENGTH | Softwire: 96" / 244 cm Hand switch at 18" / 46 cm from lamp |
| WEIGHT | min. 1.5 lb / 0.7 kg |
| CERTIFICATIONS |      IP20  |
| WARRANTY | 2 years |

HARDWIRE

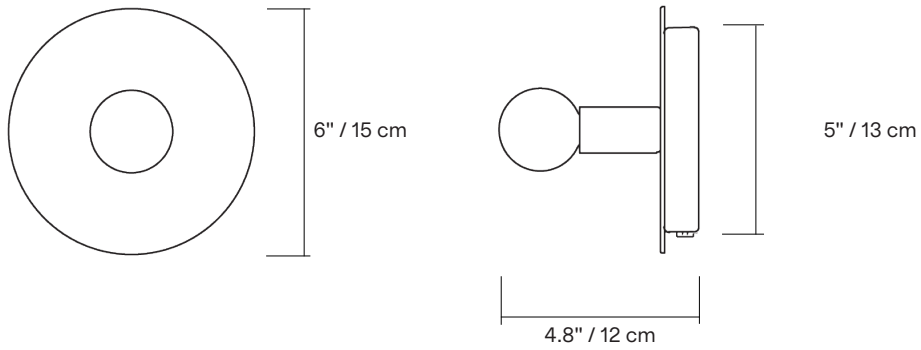

SOFTWIRE

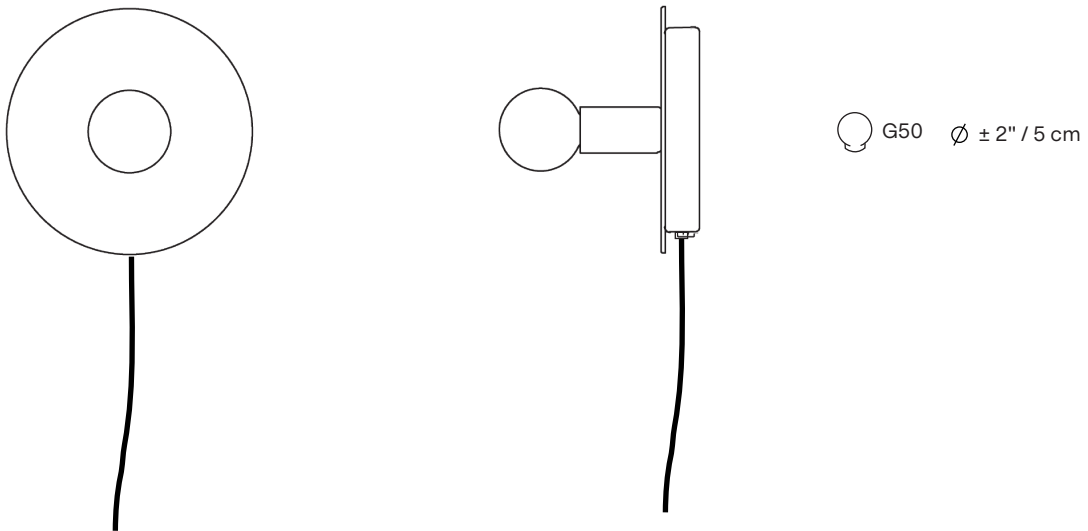

*dimensions are approximate and may vary slightly

FINISH



BR
Brass



BK
Textured
Black



WH
Textured
White



BG
Textured
Beige



MB
Textured
Midnight
Blue

CORD



BK
Black



WH
White



BG
Beige




MB
Midnight
Blue

NOTES


- Must be installed by an electrician (HW only)
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- Wall mount only

LAMP ANATOMY

HARDWIRE

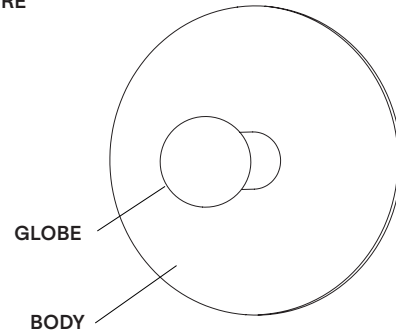

SOFTWIRE

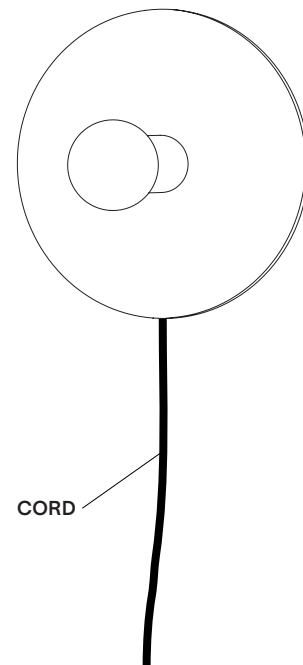

| | | Example | Fill with your selection |
|----------------------------------|---|------------------|--------------------------|
| COLLECTION | DOT Dot | DOT | DOT |
| MODEL | 03 | 03 | 03 |
| INSTALLATION | HW Hardwire SW Softwire | HW | |
| BODY | BR Brass BK Textured Black WH Textured White BG Textured Beige MB Textured Midnight Blue CC Custom colour* | BR | |
| CORD FOR SOFTWIRE ONLY | BK Black WH White BG Beige MB Midnight Blue CC Custom colour* | BK | |
| FULL SKU | | DOT03HWBR | |
| | | NOTES | |

*Custom colour available upon request. Material library on website.

FOR HARDWIRE ONLY

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|------------------|----------------|-----------|-----------|------------------|
| LUTRON - MAESTRO | MAELV-600 | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | CTELV-303P | 100% | 0% | Phase Cut |
| LUTRON - DIVA | DVELV-300P | 100% | 0% | Phase Cut |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100% | 30% | Phase Cut |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|-----------------|-----------|-----------|-----------|------------------|
| VARILIGHT | V-PRO | 100% | 2% | Phase Cut |
| LEGRAND - NILOÉ | 3 996 35 | 87% | 15% | Phase Cut |
| NIKO | 310-0280X | 94% | 5% | Phase Cut |
| NIKO | 310-0190X | 100% | 1% | Phase Cut |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.
