

lambert&fils



LAURENT 10


The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.


type:	pendant
construction:	handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
specifications:	source: LED lamp provided (G9 base) power consumption: 4,5W lumen output: 319lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	84" / 213 cm
weight:	3.1 lb / 1.4 kg
certifications:	
warranty:	2 years

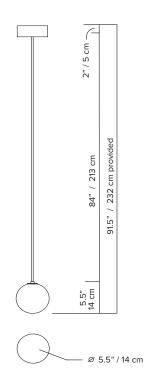

lambert&fils

ORDER GUIDE: SKU

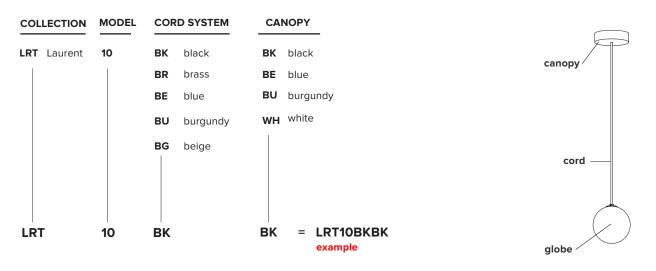

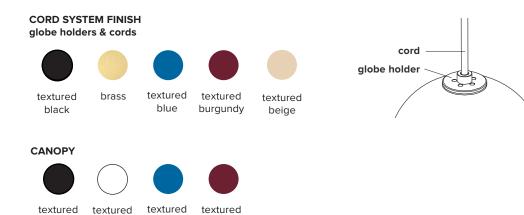

blue

burgundy

black

white

lambert&fils

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO LUTRON - SKYLARK LUTRON - SKYLARK LUTRON - DIVA LEGRAND - ADORNE	MAELV-600 SELV-300P SELV-303P CTELV-303P DVELV-300P TRUE UNIVERSAL	0% 0% 0% 0% 30%	100% 100% 100% 100% 100%	0%-10% no no no no	good very good very good very good very good good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL



NOTES:

- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions