lambert&fils



LAURENT 10

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

type: pendant

construction: handblown opaline glass globe

powder coated aluminium or brass hardware

polyester cord

specifications: source: LED lamp provided (G9 base)

power consumption: 4,5W lumen output: 319Im

colour temperature: 2700K included * 3000K available upon request

colour rendering index: 80 CRI standard


* ≥ 90 CRI upon request expected lifetime: 25 000h

control: refer to our recommended list of dimmer models

cord length: 84" / 213 cm


weight: 3.1 lb / 1.4 kg

warranty: 2 years

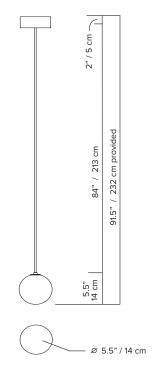

lambert&fils

ORDER GUIDE: SKU

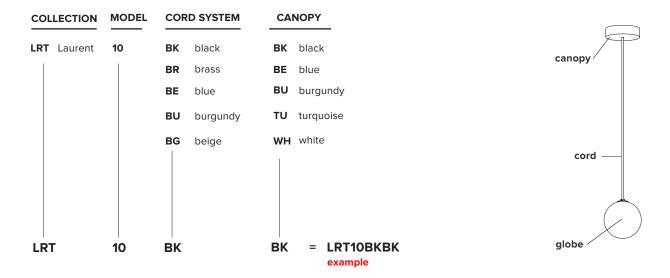










textured blue



textured burgundy



textured beige



CANOPY

black



black





textured blue



textured burgundy



textured turquoise

lambert&fils

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO LUTRON - SKYLARK LUTRON - SKYLARK LUTRON - SKYLARK LUTRON - DIVA LEGRAND - ADORNE	MAELV-600 SELV-300P SELV-303P CTELV-303P DVELV-300P TRUE UNIVERSAL	0% 0% 0% 0% 0% 30%	100% 100% 100% 100% 100%	0%-10% no no no no no	good very good very good very good very good good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL

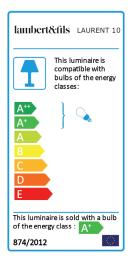

NOTES:

- must be installed by an electrician
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

Updated: Dec 2019