


BEAUBIEN 06



- To be installed by an electrician to an electrical box
- Use appropriate screws where necessary
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site




12 lbs. / 5 kg In need of background nailing

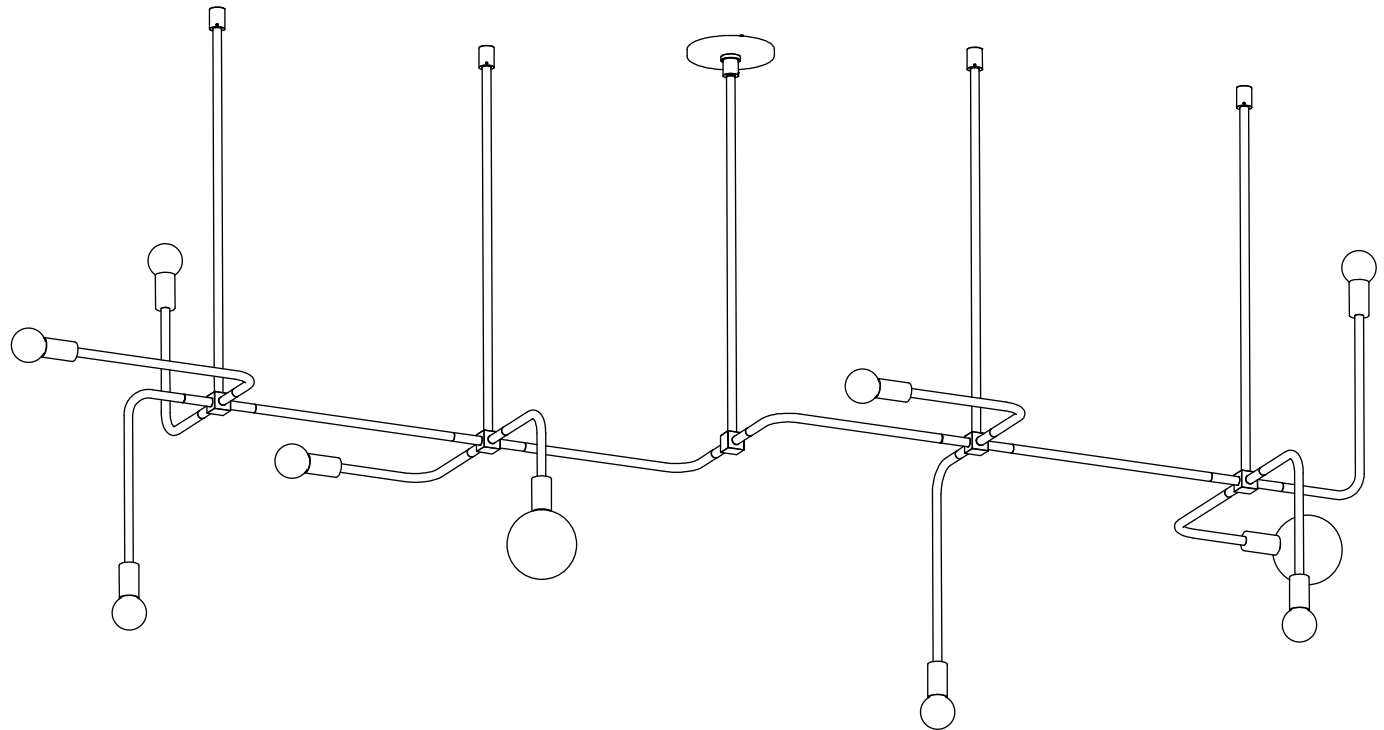


1

The luminaire has been shipped as two sections. Carefully feed wires from section **A** up and through the cube of section **B**.

Tighten set screw when connector tube is fully inserted.

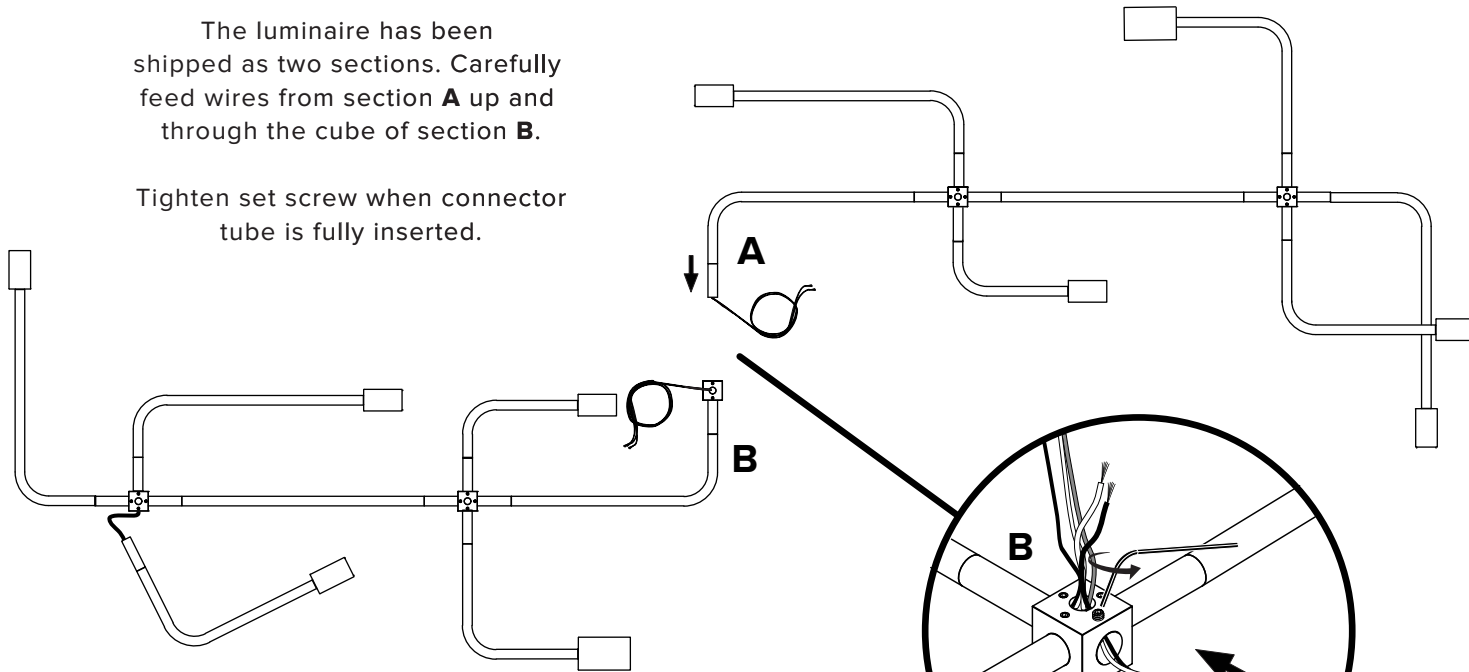

Insert removed arm into the cubes and secure set screws. The arms will be repositioned properly once the fixture has been installed to the ceiling.



Insert arms then tighten set screw gently, but firmly.

* Screw gently, but firmly




**Rotate arms shortest distance possible.
Do not rotate 3/4 turn.**

2

Mark anchor locations using
your electrical box as a guide


• Anchor location

○ Junction box

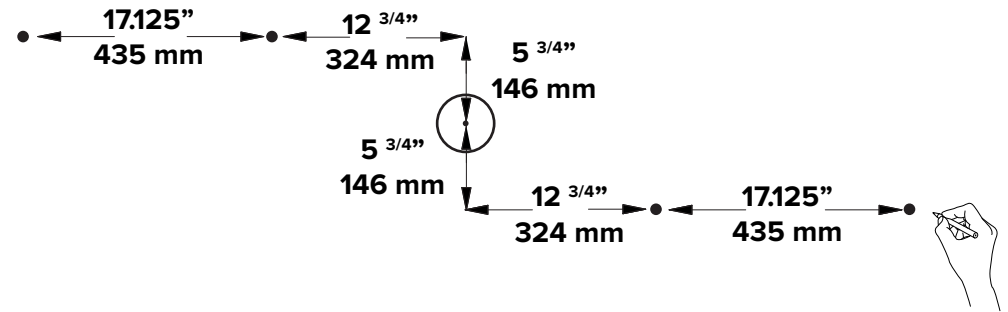


3

Screw in ceiling mounts
and canopy

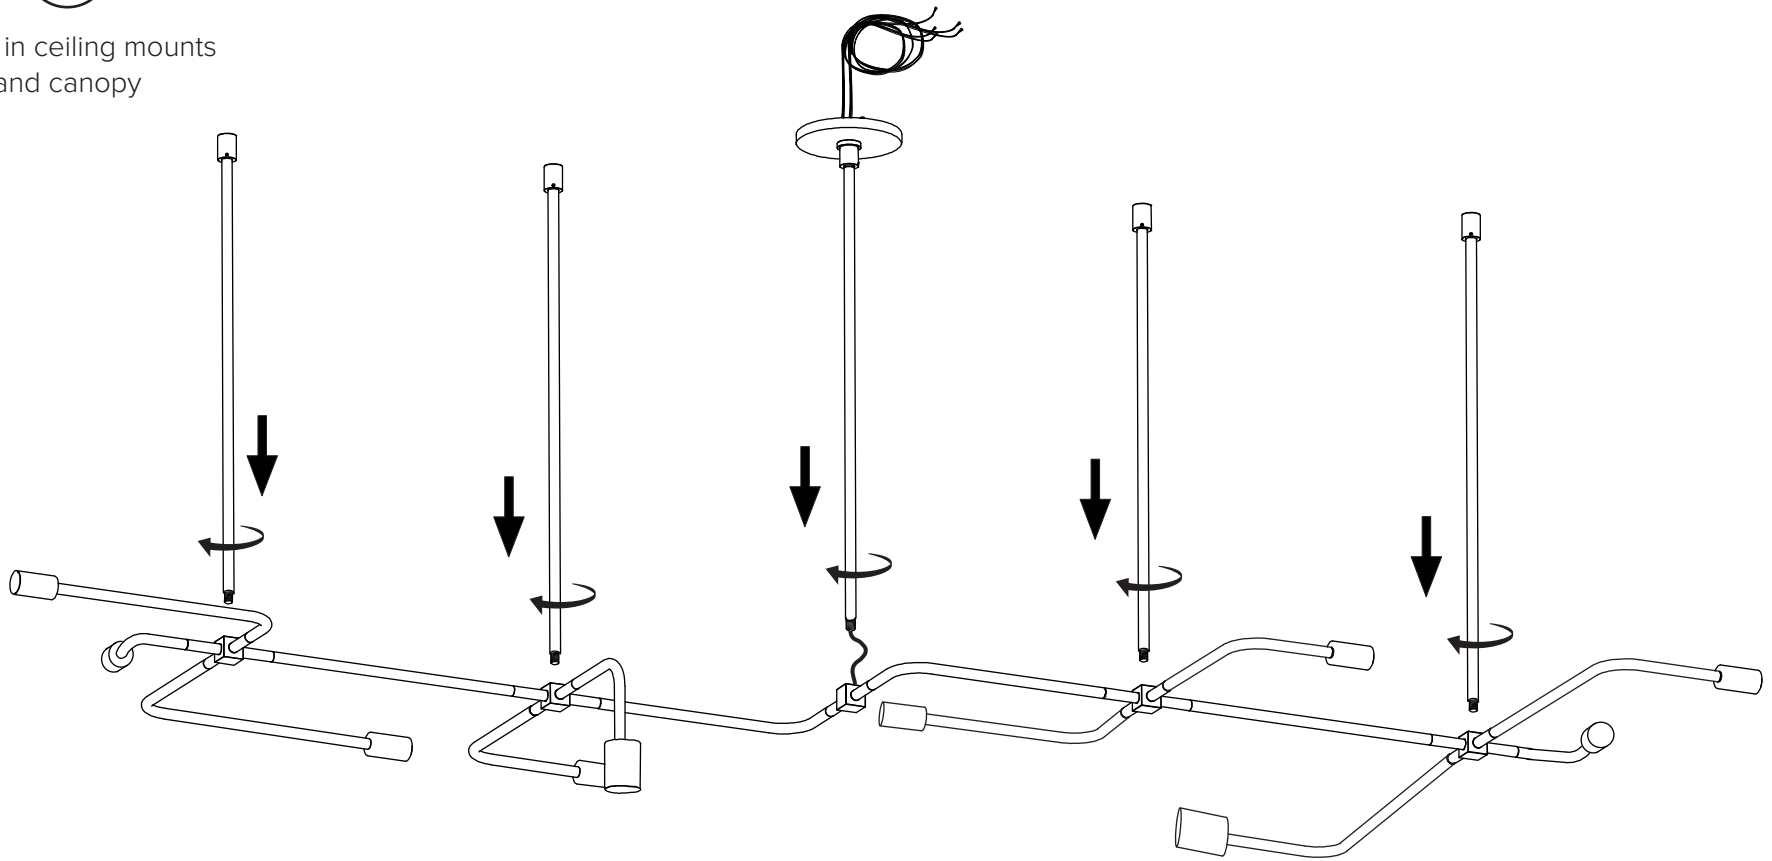


4


After having marked anchor location on the ceiling, screw in ceiling anchors using appropriate screws

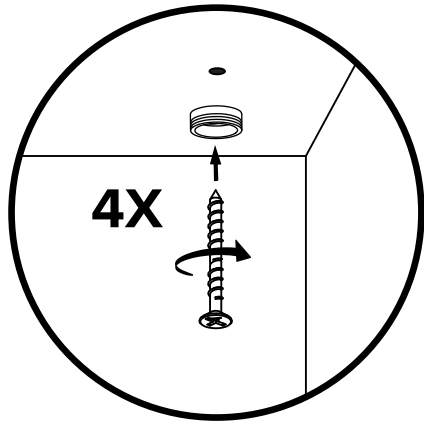

5



Loosen set screw and lower ceiling rod to allow mount to be screwed into the ceiling anchor






SCREW GENTLY BUT FIRMLY

Raise ceiling stems into the anchored ceiling mount and tighten the set screw


6

Make connection

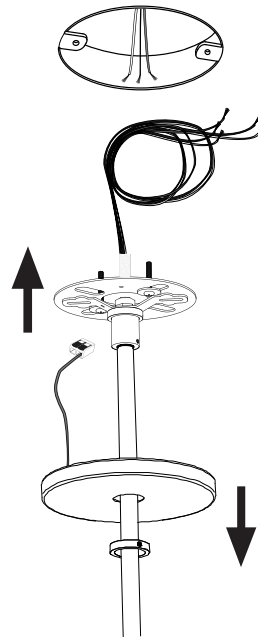
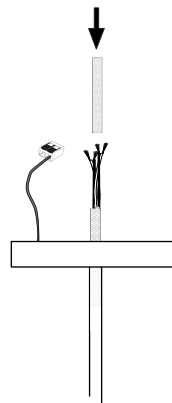


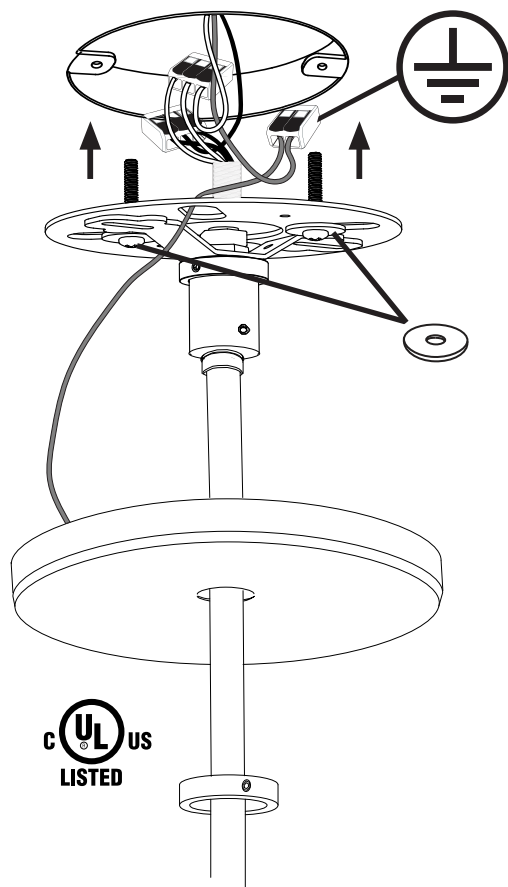

green white black
⊕ (neutral) (live)

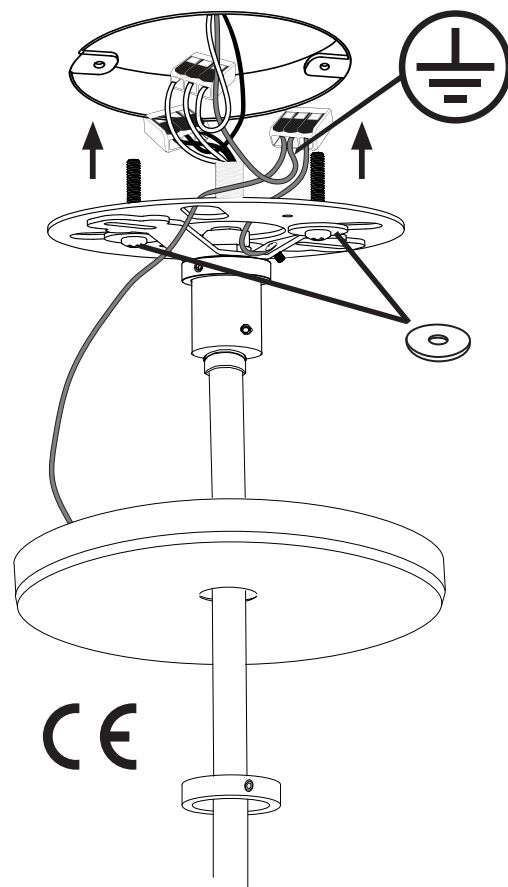


⊕ green/ blue brown
yellow (neutral) (live)

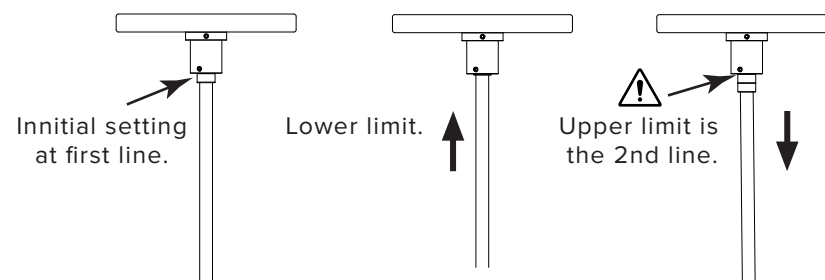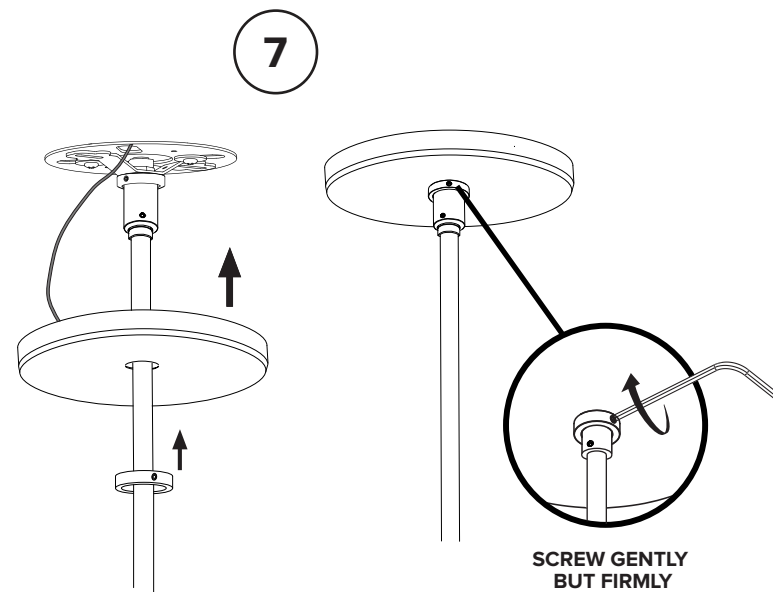

Note that the ceiling rod is adjustable

8



Reposition arms into their proper final positions. These arms were turned to facilitate shipping

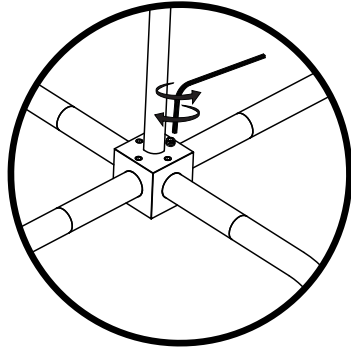


Loosen set screw, reposition arm then tighten set screw gently, but firmly.




Rotate arms shortest distance possible.
Do not rotate 3/4 turn.

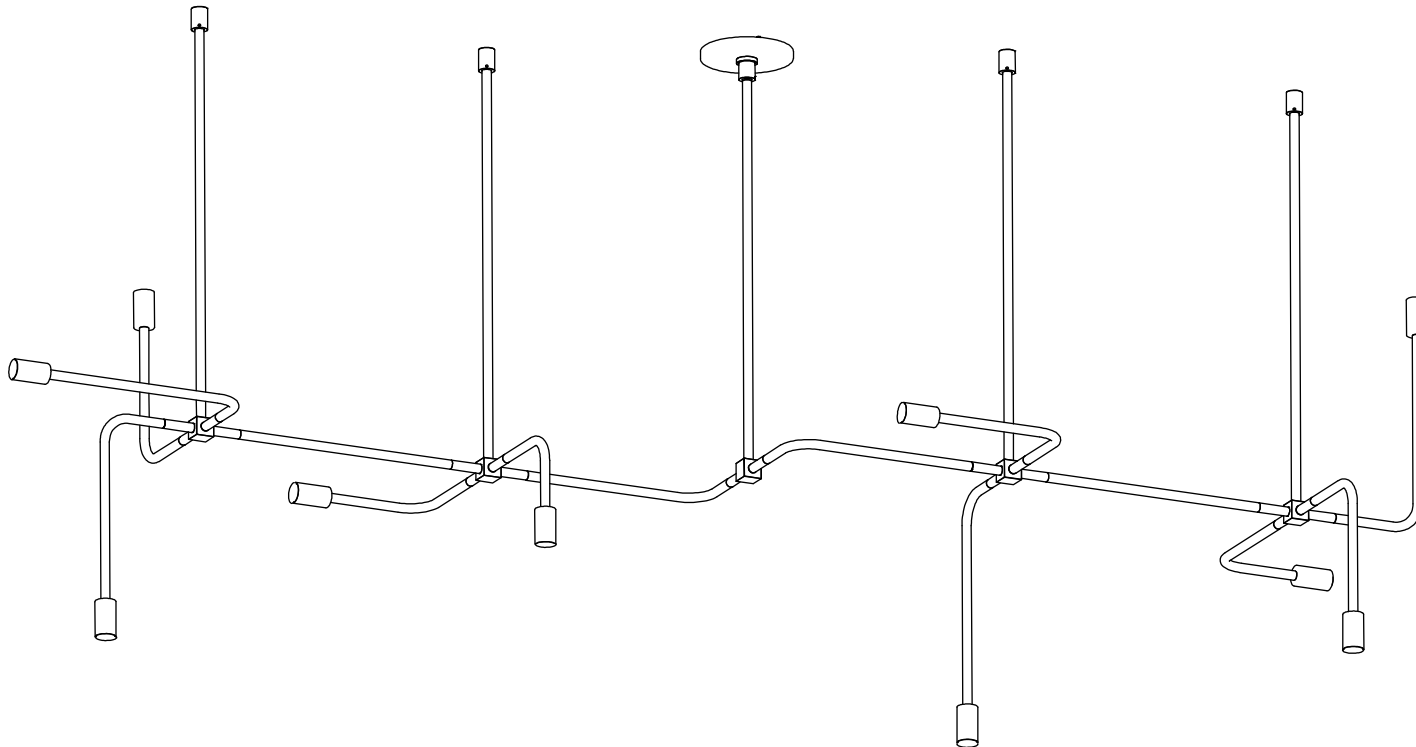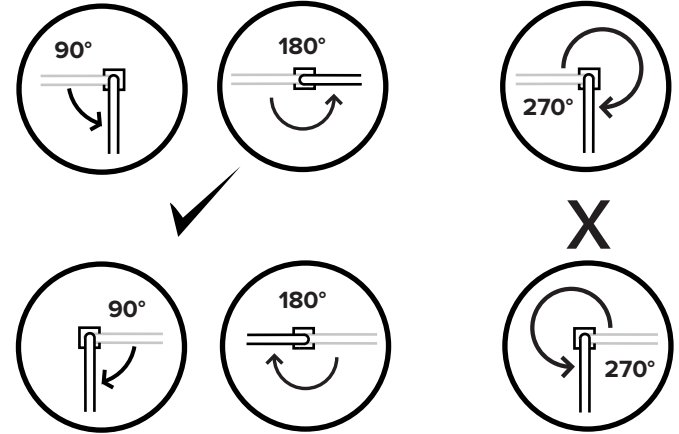

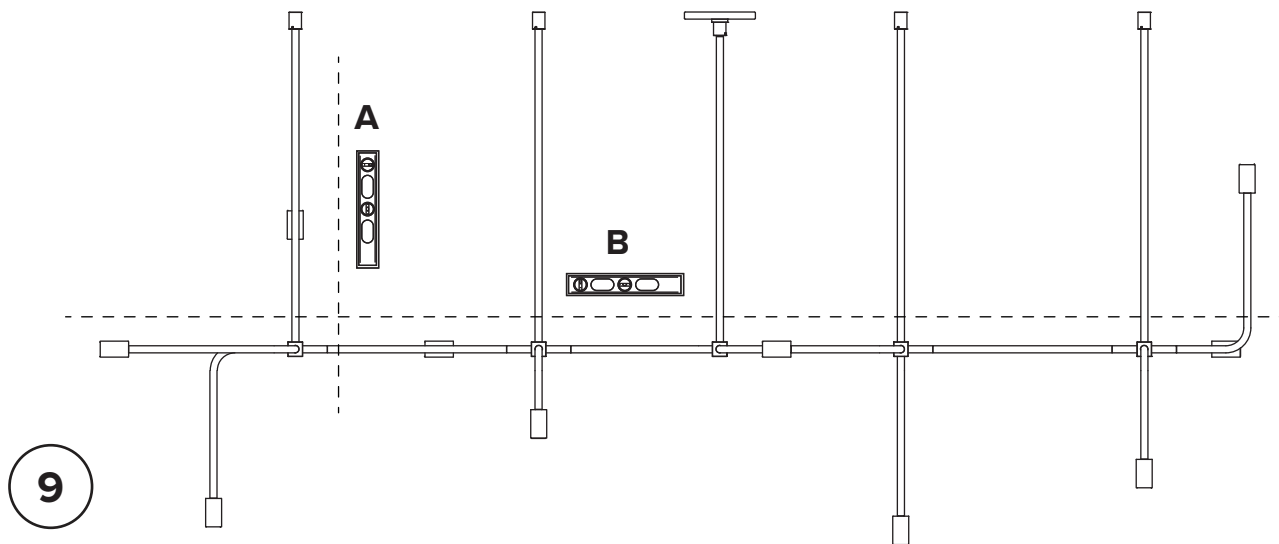


A
Horizontal level is adjusted
by tightening and loosening
the ceiling mount screws.
Be sure that screws are
sufficiently secured for safety

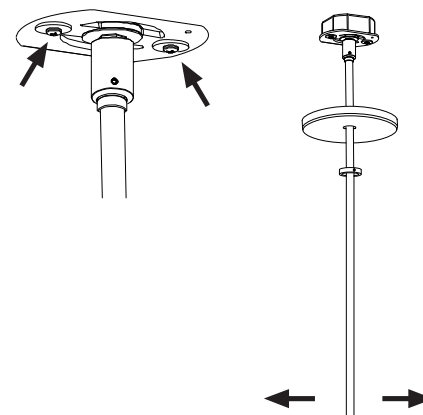


Cubes may have shifted during shipping so assure that
all cubes are straight and parallel with one another




X

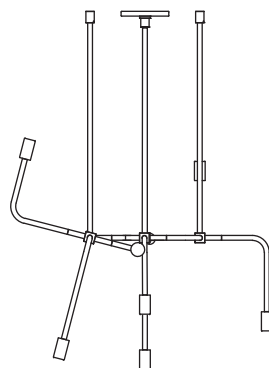

X

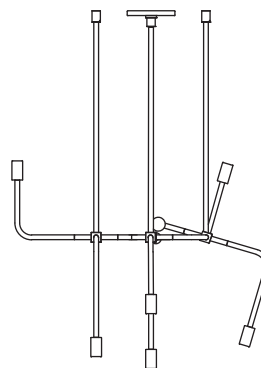

B
Vertical level is adjusted
by moving the stem up and down
between the two segmented lines



10

Insert bulbs and globes
into the sockets

