

BEAUBIEN

The Beaubien Collection's strong black lines bend in and out of space, moving effortlessly between simplicity and ornamentation. Round and cubic brass connectors complete the lamps' structures and add a rich material contrast to the powder coated rods. The collection's industrial and graphic aesthetic is imbued with a palette of influences, from traditional Chinese screens to the Memphis movement. Each influence strengthens the collection, creating nuance within its timeless character.

type: ceiling (CE), floor (FL)

wall (WA): hardwire (HW) or softwire (SW)

construction: powder coated steel and aluminum body

brass hardware milk glass globe

polyester cord, vinyl cord for floor or wall softwire

in Australia

specifications: source: LED lamp provided (G9 base)

power consumption: 1 x 4.5W, 4 x 3.5W

lumen output: 1573lm

colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard

* ≥ 90 CRI upon request expected lifetime: ≥ 25 000h

control: refer to our recommended list of dimmer models

cord length: 120" / 305 cm


CE- 120" / 305 cm of cord and 96" / 244 cm of brass beads chain (or stainless steel cable)
FL- footswitch positioned at 60"/ 152 cm from body
WASW- footswitch positioned at 72"/ 183 cm from body
WASW- handswitch positioned at 18"/ 46 cm from body

weight: starting at 7.5 lb / 3.4 kg certifications:

warranty: 2 years




FLOOR

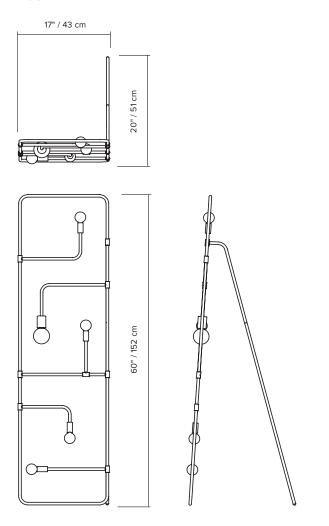



WALL

17" / 43 cm

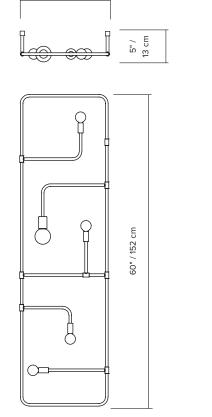




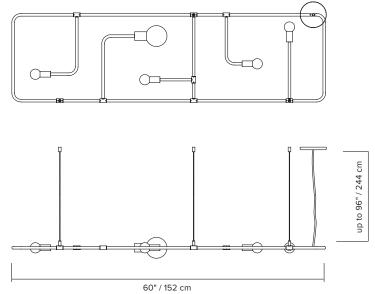








ORDER GUIDE: SKU

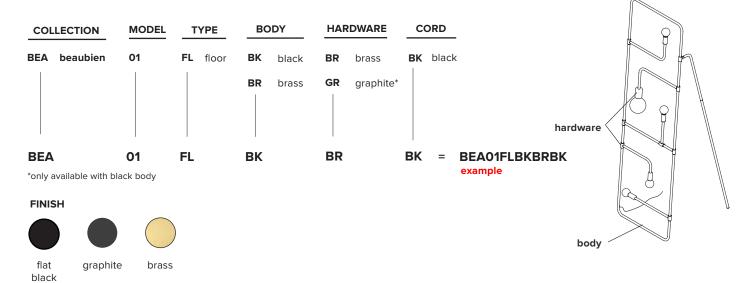

COLLECTION	MODEL	TYPE	BODY	HARDWARE*	CORD	CANOPY
BEA beaubien	01	CE ceiling	BK black	BR brass	BK black	BK black
			BR brass	GR graphite*	*	BR brass
						WH white
BEA	01	CE	DI/	BR	BK	BK = BEA01CEBKBRBKBK
DEA	01	CE	BK	DK	DK	example

*brass hardware includes brass bead chains and brass ceiling anchors. graphite hardware includes stainless steel cables and flat black ceiling anchors.

^{**}only available with black body














brass flat white



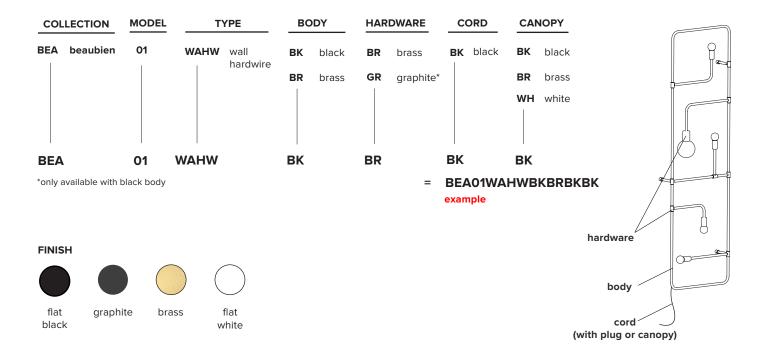

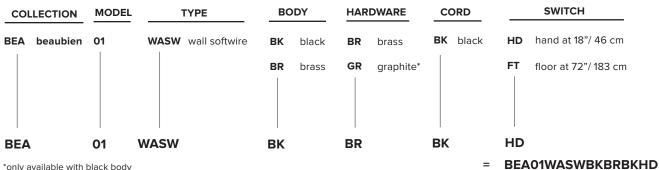

example

*only available with black body

FINISH



NOTES:

- must be installed by an electrician (except floor and wall softwire version)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

*Only applicable for the ceiling and wall hardwire models.

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL



Updated: July 2020