





BEAUBIEN

The Beaubien Collection's strong black lines bend in and out of space, moving effortlessly between simplicity and ornamentation. Round and cubic brass connectors complete the lamps' structures and add a rich material contrast to the powder coated rods. The collection's industrial and graphic aesthetic is imbued with a palette of influences, from traditional Chinese screens to the Memphis movement. Each influence strengthens the collection, creating nuance within its timeless character.



- type:** ceiling (CE), floor (FL)
wall (WA): hardwire (HW) or softwire (SW)
- construction:** powder coated steel and aluminum body
brass hardware
milk glass globe
polyester cord, vinyl cord for floor or wall softwire in Australia
- specifications:** source: LED lamp provided (G9 base)
power consumption: 1 x 4.5W, 4 x 3.5W
lumen output: 1573lm
colour temperature: 2700K included
* 3000K available upon request
colour rendering index: 80 CRI standard
* ≥ 90 CRI upon request
expected lifetime: ≥ 25 000h
- control:** refer to our recommended list of dimmer models
- cord length:** 120" / 305 cm
CE- 120" / 305 cm of cord and 96" / 244 cm of brass beads chain (or stainless steel cable)
FL- footswitch positioned at 60" / 152 cm from body
WASW- footswitch positioned at 72" / 183 cm from body
WASW- handswitch positioned at 18" / 46 cm from body
- weight:** starting at 7.5 lb / 3.4 kg
- certifications:**    
- warranty:** 2 years




FLOOR

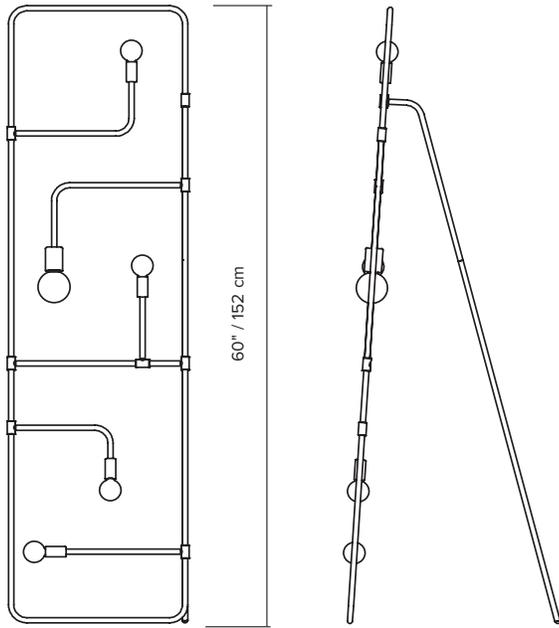



WALL

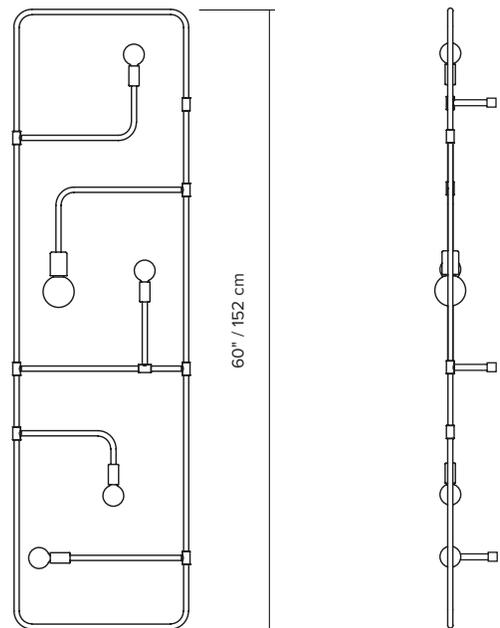

CEILING

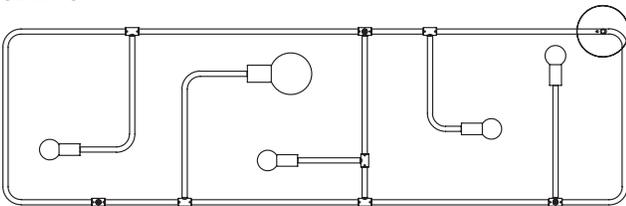

-  G80 $\varnothing \pm 3" / 80 \text{ mm}$
-  G50 $\varnothing \pm 2" / 50 \text{ mm}$

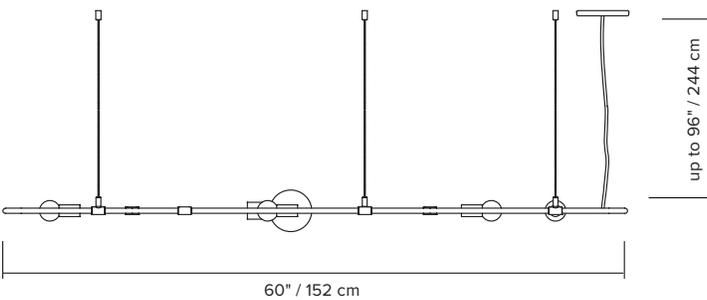


ORDER GUIDE: SKU

| COLLECTION | MODEL | TYPE | BODY | HARDWARE | CORD |
|--------------|-------|----------|----------------------|--------------------------|----------|
| BEA beaubien | 01 | FL floor | BK black BR brass | BR brass GR graphite* | BK black |

BEA 01 FL BK BR BK = BEA01FLBKBRBK
example

*only available with black body

FINISH

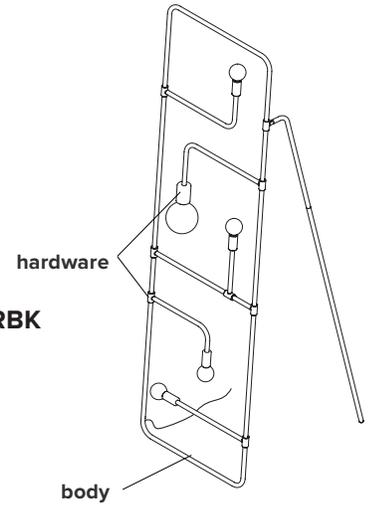


| COLLECTION | MODEL | TYPE | BODY | HARDWARE* | CORD | CANOPY |
|--------------|-------|------------|----------------------|---------------------------|----------|----------------------------------|
| BEA beaubien | 01 | CE ceiling | BK black BR brass | BR brass GR graphite** | BK black | BK black BR brass WH white |

BEA 01 CE BK BR BK BK = BEA01CEBKBRBK
example

*brass hardware includes brass bead chains and brass ceiling anchors.
 graphite hardware includes stainless steel cables and flat black ceiling anchors.

**only available with black body

FINISH

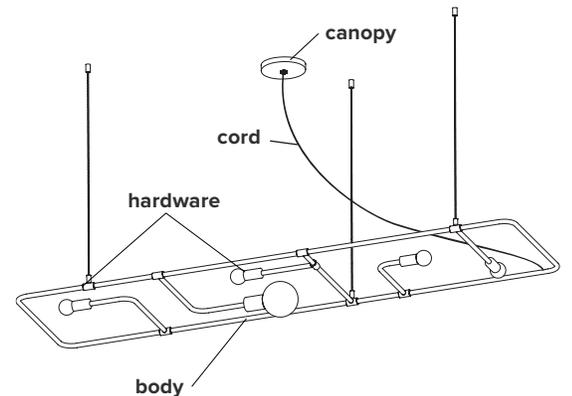

| COLLECTION | MODEL | TYPE | BODY | HARDWARE | CORD | CANOPY |
|--------------|-------|-----------------------|----------------------|--------------------------|----------|----------------------------------|
| BEA beaubien | 01 | WAHW wall hardwire | BK black BR brass | BR brass GR graphite* | BK black | BK black BR brass WH white |
| BEA | 01 | WAHW | BK | BR | BK | BK |

*only available with black body

= **BEA01WAHWBKBRBK**
example

FINISH



flat
black




graphite



brass



flat
white

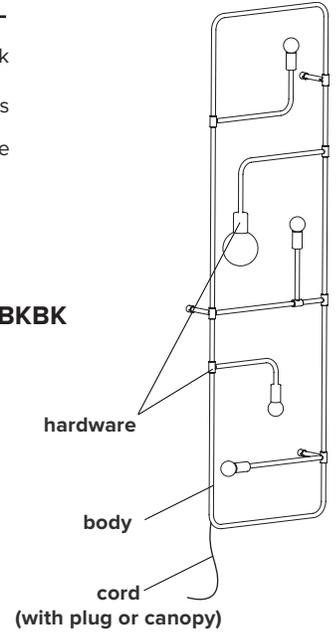

| COLLECTION | MODEL | TYPE | BODY | HARDWARE | CORD | SWITCH |
|--------------|-------|-----------------------|----------------------|--------------------------|----------|--|
| BEA beaubien | 01 | WASW wall softwire | BK black BR brass | BR brass GR graphite* | BK black | HD hand at 18"/ 46 cm FT floor at 72"/ 183 cm |
| BEA | 01 | WASW | BK | BR | BK | HD |

*only available with black body

= **BEA01WASWBKBRBKHD**
example

FINISH



flat
black



graphite



brass

NOTES:

- must be installed by an electrician (except floor and wall softwire version)
- stainless steel cables not meant for slanted ceilings
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

*Only applicable for the ceiling and wall hardwire models.

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND | MODEL NUMBER | MIN LEVEL | MAX LEVEL | FLICKERING | OVERALL QUOTE |
|------------------|----------------|-----------|-----------|------------|---------------|
| LUTRON - MAESTRO | MAELV-600 | 0% | 100% | 0%-10% | good |
| LUTRON - SKYLARK | SELV-300P | 0% | 100% | no | very good |
| LUTRON - SKYLARK | SELV-303P | 0% | 100% | no | very good |
| LUTRON - SKYLARK | CTELV-303P | 0% | 100% | no | very good |
| LUTRON - DIVA | DVELV-300P | 0% | 100% | no | very good |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 30% | 100% | no | good |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

| DIMMER BRAND | MODEL NUMBER | MIN LEVEL | MAX LEVEL | FLICKERING | OVERALL QUOTE |
|-----------------|--------------|-----------|-----------|------------|---------------|
| VARILIGHT | V-PRO | 2% | 100% | no | very good |
| LEGRAND - NILOÉ | 3 996 35 | 15% | 87% | no | good |
| NIKO | 310-0280X | 5% | 94% | no | very good |
| NIKO | 310-0190X | 1% | 100% | no | very good |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL

