









BEAUBIEN


The Beaubien Collection's strong black lines bend in and out of space, moving effortlessly between simplicity and ornamentation. Round and cubic brass connectors complete the lamps' structures and add a rich material contrast to the powder coated rods. The collection's industrial and graphic aesthetic is imbued with a palette of influences, from traditional Chinese screens to the Memphis movement. Each influence strengthens the collection, creating nuance within its timeless character.

- type:** ceiling (CE), wall (WA): hardwire (HW) or softwire (SW)
- construction:** powder coated steel and aluminum body
brass hardware
milk glass globe
polyester cord, vinyl cord for floor or wall softwire in Australia
- specifications:** source: LED lamp provided (G9 base)
power consumption: 1 x 4.5W, 4 x 3.5W
lumen output: 1573lm
colour temperature: 2700K included
* 3000K available upon request
colour rendering index: 80 CRI standard
* ≥ 90 CRI upon request
expected lifetime: ≥ 25 000h
- control:** refer to our recommended list of dimmer models
- cord length:** 120" / 305 cm
CE- 120" / 305 cm of cord and 96" / 244 cm of brass beads chain (or stainless steel cable)
WASW- footswitch positioned at 72" / 183 cm from body
WASW- handswitch positioned at 18" / 46 cm from body
- weight:** starting at 7.5 lb / 3.4 kg
- certifications:**     IP20
- warranty:** 2 years



WALL

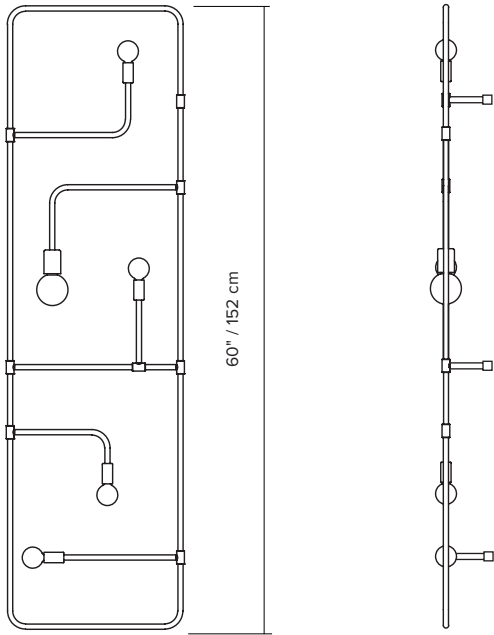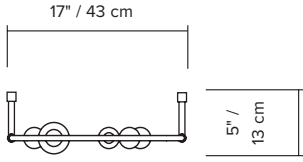

CEILING

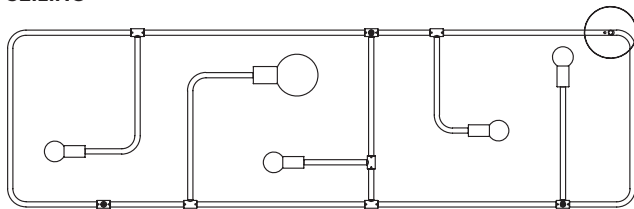

- G80 $\varnothing \pm 3" / 80 \text{ mm}$
- G50 $\varnothing \pm 2" / 50 \text{ mm}$

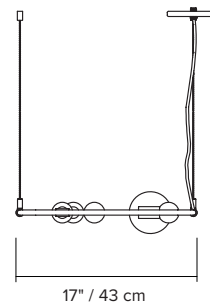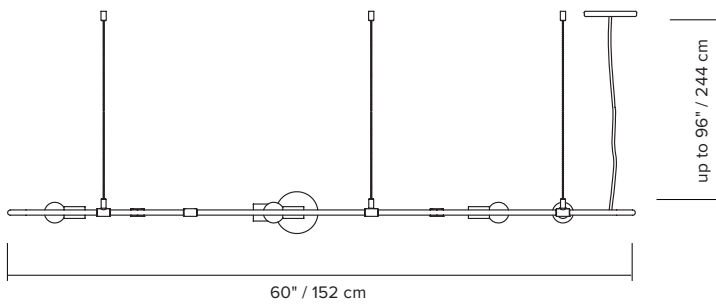

ORDER GUIDE: SKU

COLLECTION	MODEL	TYPE	BODY	HARDWARE*	CORD	CANOPY
BEA beaubien	01	CE ceiling	BK black BR brass	BR brass GR graphite**	BK black	BK black BR brass WH white
BEA	01	CE	BK	BR	BK	BK = BEA01CEBKBRBK example

*brass hardware includes brass bead chains and brass ceiling anchors.
graphite hardware includes stainless steel cables and flat black ceiling anchors.

**only available with black body

FINISH



flat black




graphite



brass



flat white

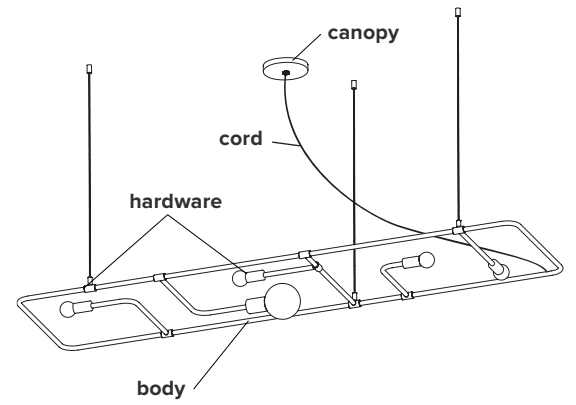

COLLECTION	MODEL	TYPE	BODY	HARDWARE	CORD	CANOPY
BEA beaubien	01	WAHW wall hardwire	BK black BR brass	BR brass GR graphite*	BK black	BK black BR brass WH white
BEA	01	WAHW	BK	BR	BK	BK

*only available with black body

= **BEA01WAHWBKBRBK**
example

FINISH



flat black




graphite



brass



flat white

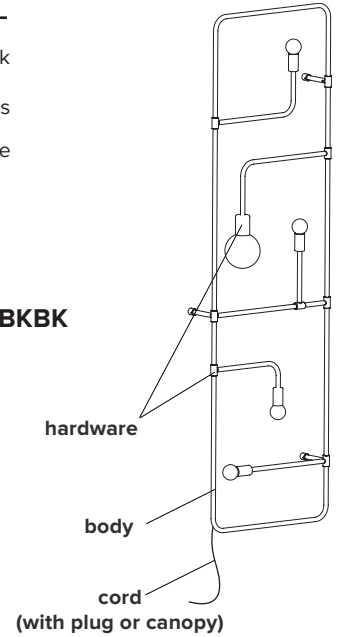

COLLECTION	MODEL	TYPE	BODY	HARDWARE	CORD	SWITCH
BEA beaubien	01	WASW wall softwire	BK black BR brass	BR brass GR graphite*	BK black	HD hand at 18"/ 46 cm FT floor at 72"/ 183 cm
BEA	01	WASW	BK	BR	BK	HD

*only available with black body

= **BEA01WASWBKBRBKHD**
example

FINISH



flat black



graphite



brass

NOTES:

- must be installed by an electrician (except floor and wall softwire version)
- stainless steel cables not meant for slanted ceilings
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

DIMMER SPECIFICATIONS

*Only applicable for the ceiling and wall hardwire models.

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.