lambert&fils

BEAUBIEN SIMPLE SHADE



30" / 762 mm 2438 mm max 96" / max 126" / 3200 mm

type wall

materials shade: powdercoated aluminium

body: powdercoated steel sphere: milk glass (G50)

hardware: brass

canopy: powdercoated steel

wire: nylon

weight 1.5 lb / 0.7 kg

light bulb LED (included), 1x 3,5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models

certifications of the certifications

notes – must be installed by an electrician;

additional charges for modifications or for special orders


lead time between 8-9 weeks

- dimensions are approximate and may vary

slightly

lambert&fils


ORDER GUIDE: SKU

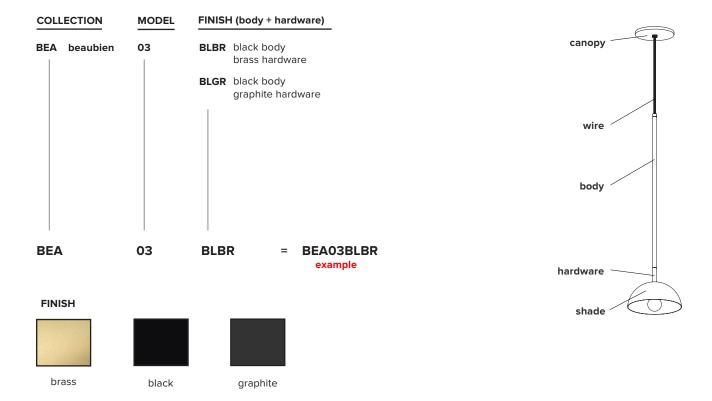


lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS




Frosted 3.5W 100V-120V / 240V 350 Lumens 2700 K 25 000 H CRI ≥80 2 years warranty





SPHERES



tube \emptyset 1" / 27 mm length ± 2" / 60 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommand conducting your own test before final installation.