


# DOT LINE WALL







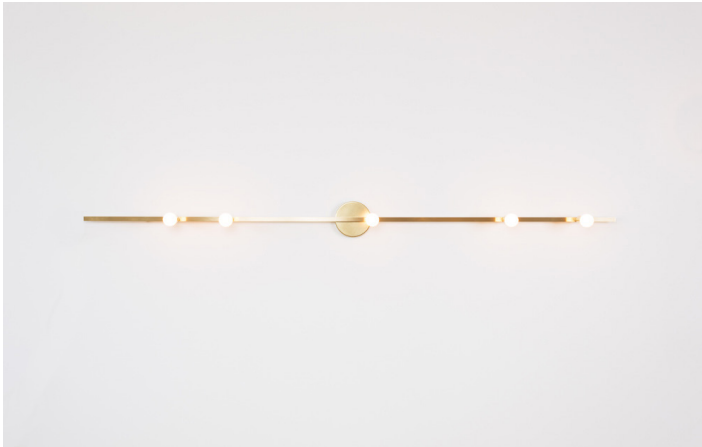

HARDWIRE





SOFTWIRE



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.


<b>TYPE</b>	Wall - softwire (SW) or hardwire (HW)
<b>CONSTRUCTION</b>	Brass or powder coated aluminum and brass body Brass or powder coated brass hardware Milk glass globes Polyester cord (SW)
<b>SPECIFICATIONS</b>	Source: LED lamp provided (G9 base) Power consumption: 5x 3.5W Lumen output: 1202lm  Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard * ≥ 90 CRI upon request Expected lifetime: ≥ 15 000h
<b>CONTROL</b>	Refer to our recommended list of dimmer models (HW)
<b>CORD LENGTH</b>	Softwire hand switch: 96"/ 244 cm provided Switch positioned at 18"/ 46 cm from body  Softwire foot switch: 120"/ 305 cm provided Switch positioned at 72"/ 183 cm from body
<b>WEIGHT</b>	Brass: 4.6 lb / 2.1 kg Powder coated aluminum: 3.8 lbs / 1.8 kg
<b>CERTIFICATIONS</b>	     IP20 
<b>WARRANTY</b>	2 years

## HARDWIRE



## SOFTWIRE

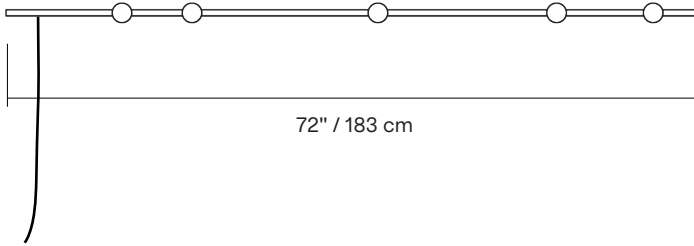

 G50  $\varnothing \pm 2" / 50 \text{ mm}$

\*dimensions are approximate and may vary slightly

## FINISH



**BR**  
Brass



**BK**  
Textured  
Black



**WH**  
Textured  
White



**BG**  
Textured  
Beige



**MB**  
Textured  
Midnight  
Blue

## CORD

(\*CORDS ONLY AVAILABLE IN BLACK VINYL FOR AUSTRALIA FOR FOOTSWITCH, BLACK OR WHITE FOR HANDSWITCH)



**BK**  
Black



**WH**  
White



**BG**  
Beige




**MB**  
Midnight  
Blue

## NOTES


- Must be installed by an electrician (HW only)
- Wall mount only
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

### HARDWIRE

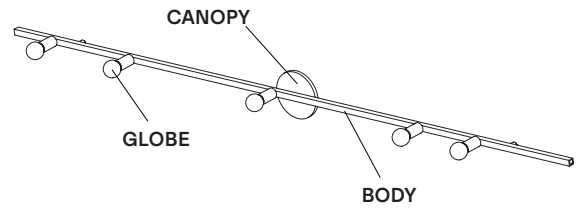

### SOFTWIRE

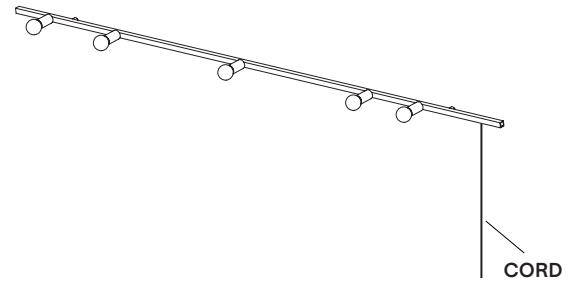

## HARDWARE

		Example	Fill with your selection
<b>COLLECTION</b>	<b>DOT</b> Dot	<b>DOT</b>	<b>DOT</b>
<b>MODEL</b>	<b>10</b>	<b>10</b>	<b>10</b>
<b>INSTALLATION</b>	<b>HW</b> Hardwire	<b>HW</b>	<b>HW</b>
<b>BODY</b>	<b>BR</b> Brass <b>BK</b> Textured Black <b>WH</b> Textured White <b>BG</b> Textured Beige <b>MB</b> Textured Midnight Blue <b>CC</b> Custom colour*	<b>BR</b>	
<b>CANOPY</b>	<b>BR</b> Brass <b>BK</b> Textured Black <b>WH</b> Textured White <b>BG</b> Textured Beige <b>MB</b> Textured Midnight Blue <b>CC</b> Custom colour*	<b>BR</b>	
<b>FULL SKU</b>		<b>DOT10HWBRBR</b>	
		<b>NOTES</b>	

## SOFTWARE

		Example	Fill with your selection
<b>COLLECTION</b>	<b>DOT</b> Dot	<b>DOT</b>	<b>DOT</b>
<b>MODEL</b>	<b>10</b>	<b>10</b>	<b>10</b>
<b>INSTALLATION</b>	<b>SW</b> Software	<b>SW</b>	<b>SW</b>
<b>BODY</b>	<b>BR</b> Brass <b>BK</b> Textured Black <b>BG</b> Textured Beige <b>MB</b> Textured Midnight Blue <b>CC</b> Custom colour*	<b>BR</b>	
<b>CORD**</b>	<b>BK</b> Black <b>WH</b> White <b>BG</b> Beige <b>MB</b> Midnight Blue <b>CC</b> Custom colour*	<b>BK</b>	
<b>SWITCH TYPE</b>	<b>HD</b> Hand switch at 18"/ 46 cm <b>FT</b> Foot switch at 72"/ 183 cm	<b>HD</b>	
<b>FULL SKU</b>		<b>DOT10SWBRBKHD</b>	
		<b>NOTES</b>	

\*Custom colour available upon request. Material library on website.

\*\*Cords only available in black vinyl for Australia for footswitch, black or white for handswitch)

## FOR HARDWIRE ONLY

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

---

Some dimmers require a minimum load, check specifications.

---

\*Other dimmers that specify LED lamp compatibility may operate without issue.

---

We recommend conducting your own test before final installation.

---

\*\*Leading edge is also known as TRIAC or Forward Phase.

---

Trailing edge is also known as ELV or Reverse Phase.

---