lambert&fils

DOT LINE SUSPENSION



type suspension

materials body: brass (BR) or

powder coated aluminium (BL/WH)

hardware: brass

sphere: milk glass (G50) canopy: brass (BR) or

powder coated steel (BL/WH)

chain: brass (BR) or steel (BL/WH)

wire: nylon

wire length 96" / 2438 mm

cable length 90" / 2286 mm

weight 1.8 lb / 0.8 kg

light bulb LED (included), 5x 3,5W

sockets G9

voltage 120V / 240V

dimmer refer to our recommended list of dimmer models


certifications (()

notes – must be installed by an electrician

additional charges for modifications or for special orders


lead time between 8-9 weeks


dimensions are approximate and may vary slightly

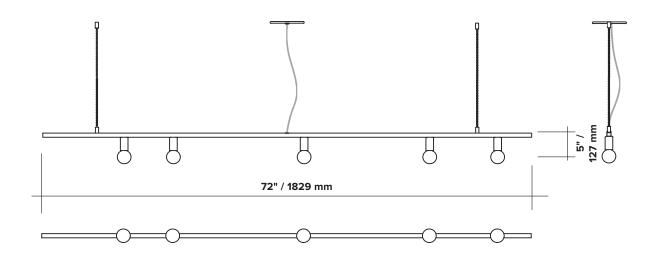

lambert&fils

ORDER GUIDE: SKU





FINISH








brass

flat white

lambert&fils

LIGHT BULB & DIMMER SPECIFICATIONS

G9 SOCKETS SPHERES









DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	0%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	0%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	0%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	0%	no	very good
LUTRON - DIVA	DVELV-300P	100%	0%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

G50 Ø ±2" / 50 mm

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS - 230V

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT LEGRAND - NILOÉ NIKO	V-PRO 3 996 35 310-0280X	100% 87% 94%	2% 15% 5%	no no no	very good good very good
NIKO	310-0190X	100%	1%	no	very good

^{*}Other dimmers can yield good results and we recommend conducting your own test before final installation.