

# RECESSED CANOPY

## 120V installation



COVER PLATE A01





COVER PLATE C03



COVER PLATE B01

A low-voltage lighting fixture requires the use of a power supply (driver) to be powered. This requires the use of a significant canopy size that can be quite imposing on an aesthetic point of view. To reduce its footprint and streamline visual impact we offer the use of a recessed canopy for some of our models. In short, the power supply is concealed in the ceiling offering a refined look and emphasizing the attention on the fixture's design.

|                 |  |
|-----------------|--|
| TYPE            | Recessed canopy  |
| APPLICABLE WITH | Mile collection<br>Clark 02<br>Dorval 05<br>Sainte collection<br>Silo collection   |
| CONSTRUCTION    | Powder coated steel and aluminum body<br>Powder coated steel cover plate   |
| INSTALLATION    | For non-insulated hollow ceiling   |
| WEIGHT          | max. 2.2 lb / 1 kg (including cover plate)   |
| CERTIFICATIONS  |   IP20 |
| WARRANTY        | 2 years  |

## WARNING


Not all ceilings can host a recessed canopy as it requires clearance above the ceiling.  
Please consult the drawings below.

\* Can be mounted on slanted ceilings (max 45 °)

## RECESSED CANOPY - CHECK LIST

- Must be installed in a non-insulated ceiling.
- Confirm you have the required clearance in the ceiling plenum. (See drawing below)
- Respect min and max ceiling thickness. (See drawing below)
- The hole size for installation is 4 1/8" / 10.5 cm

## RECESSED CANOPY WITH AUXILIARY BOX

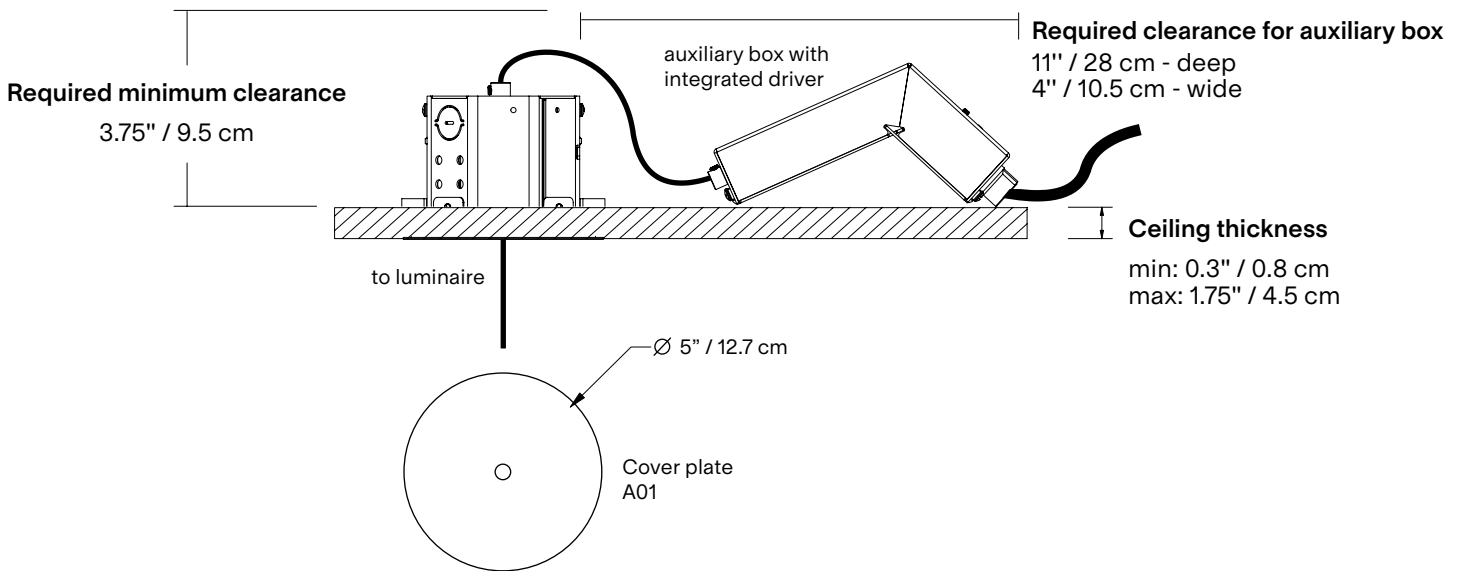

\*dimensions are approximate and may vary slightly

WARNING


Not all ceilings can host a recessed canopy as it requires clearance above the ceiling. Please consult the drawings below.

\* Can be mounted on slanted ceilings (max 45 °)

RECESSED CANOPY - CHECK LIST

- Must be installed in a non-insulated ceiling.
- Confirm you have the required clearance in the ceiling plenum. (See drawing below)
- Respect min and max ceiling thickness. (See drawing below)
- The hole size for installation is 4 1/8" / 10.5 cm

RECESSED CANOPY WITH REMOTE DRIVER

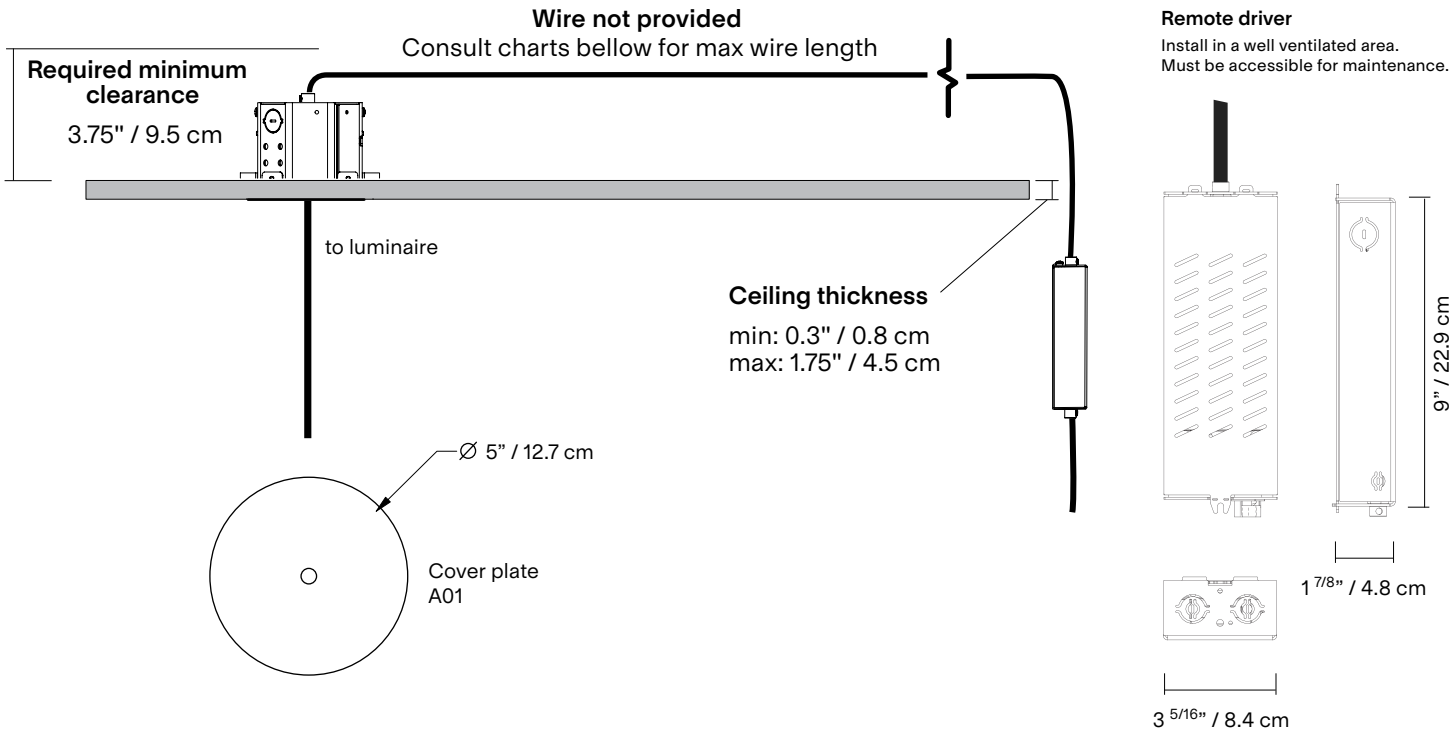

Distance between lamp and driver.

mile, clark 02, dorval 05

| Wire gauge | Max Distance     |
|------------|------------------|
| 18AWG      | 64.6 ft / 19.7m  |
| 16AWG      | 102.7 ft / 31.3m |
| 14AWG      | 163.3 ft / 49.8m |
| 12AWG      | 259.7 ft / 79.1m |

sainte

| Wire gauge | Max Distance      |
|------------|-------------------|
| 18AWG      | 131.3 ft / 40m    |
| 16AWG      | 208.8 ft / 63.7m  |
| 14AWG      | 332.1 ft / 101.2m |
| 12AWG      | 528.1 ft / 161m   |

siilo

| Wire gauge | Max Distance     |
|------------|------------------|
| 18AWG      | 34.4 ft / 10.5m  |
| 16AWG      | 54.7 ft / 16.7m  |
| 14AWG      | 86.9 ft / 26.5m  |
| 12AWG      | 138.2 ft / 42.1m |

\*dimensions are approximate and may vary slightly

COVER PLATE FINISH


BK

Textured black

WH

Textured white

PRODUCT ANATOMY



COVER PLATE

Mile collection, Clark 02 and Dorval 05

A01

Sainte collection

STE 01 to 05, 21 to 25

B01

STE 06 to 09

B02

Silo collection

SIL 2S, 3S, 4S

C01

SIL 10, 11

C02

SIL 12

C03

SIL 13

C04

SIL 14

C05

|                   |     |                                      | Example   | Fill with your selection |
|-------------------|-----|--------------------------------------|-----------|--------------------------|
| INSTALLATION TYPE | RC  | Recessed canopy with auxiliary box   | RC        |                          |
|                   | RM  | Recessed canopy with remote driver   |           |                          |
| COVER PLATE MODEL | A01 | Mile collection, Clark 02, Dorval 05 | A01       |                          |
|                   | B01 | Sainte 01-05, 21-25                  |           |                          |
|                   | B02 | Sainte 06-09                         |           |                          |
|                   | C01 | Silo 2S, 3S, 4S                      |           |                          |
|                   | C02 | Silo 10, 11                          |           |                          |
|                   | C03 | Silo 12                              |           |                          |
|                   | C04 | Silo 13                              |           |                          |
|                   | C05 | Silo 14                              |           |                          |
| FINISH            | BK  | Textured black                       | BK        |                          |
|                   | WH  | Textured white                       |           |                          |
|                   | CC  | Custom colour*                       |           |                          |
| DIMMING           | ZT  | 0-10V                                | ZT        |                          |
|                   | PH  | Phase dimming                        |           |                          |
| FULL SKU          |     |                                      | RCA01BKZT |                          |
|                   |     |                                      | NOTES     |                          |

\*Custom colour available upon request. Material library on website.

# ORDERING NOTICE

SIGNATURE NEEDED

# AVIS DE COMMANDE

SIGNATURE REQUISE

By signing the Ordering Notice, the Purchaser acknowledges having read, understood, and agreed to the Product's specifications and limitations as set forth on pages 2 and 3 of the Recessed canopy specification sheet. The Purchaser understands that the product cannot be reimbursed nor exchanged (final sale), unless the Product has a manufacturing defect, in which case the Product will be subject to Lambert &Fils' standard Terms and Conditions, as stated on our website.

[Terms and conditions](#)

En signant l'Avis de Commande, l'Acheteur reconnaît avoir lu, compris et accepté les spécifications et limitations du Produit telles qu'énoncées aux pages 2 et 3 de la fiche technique du Pavillon encastré (Recessed canopy). L'Acheteur comprend que le produit ne peut être remboursé ni échangé (vente finale), à moins que le Produit présente un défaut de fabrication. Dans ce cas, le Produit sera soumis aux Conditions Générales standards de Lambert &Fils, telles qu'indiquées sur notre site Internet.

[Conditions générales](#)

signature

date