
lambert&fils


MILE 01



| type: | suspension | suspension | | | | |
|-----------------|---|--|--|--|--|--|
| materials: | body: lens: hardware: wire: | powder coated aluminum frosted polycarbonate powder coated aluminum & steel polyester | | | | |
| wire length: | | 108" live wire feed 84" unloaded wire | | | | |
| weight: | 7.2 lb / 3.3 kg | 7.2 lb / 3.3 kg | | | | |
| light source: | 119W (see light source section for specifications) | | | | | |
| voltage: | 120V / 240V | | | | | |
| dimmer: | refer to our recommended list of dimmer models | | | | | |
| certifications: | | | | | | |
| notes: | must be installed by an electrician additional charges for modifications | | | | | |




- or for special orders dimensions are approximate and may vary slightly lead time 7-9 weeks

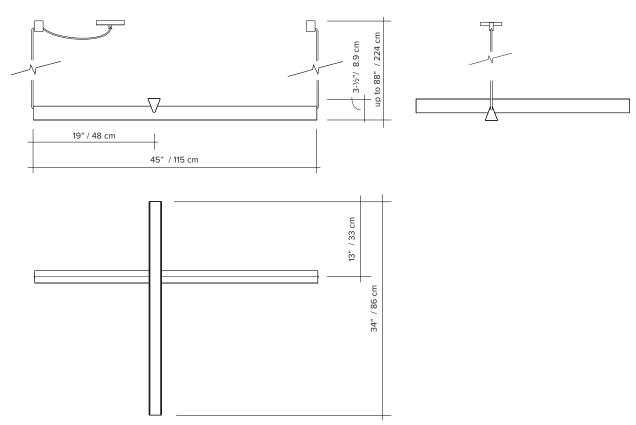

lambert&fils

ORDER GUIDE: SKU

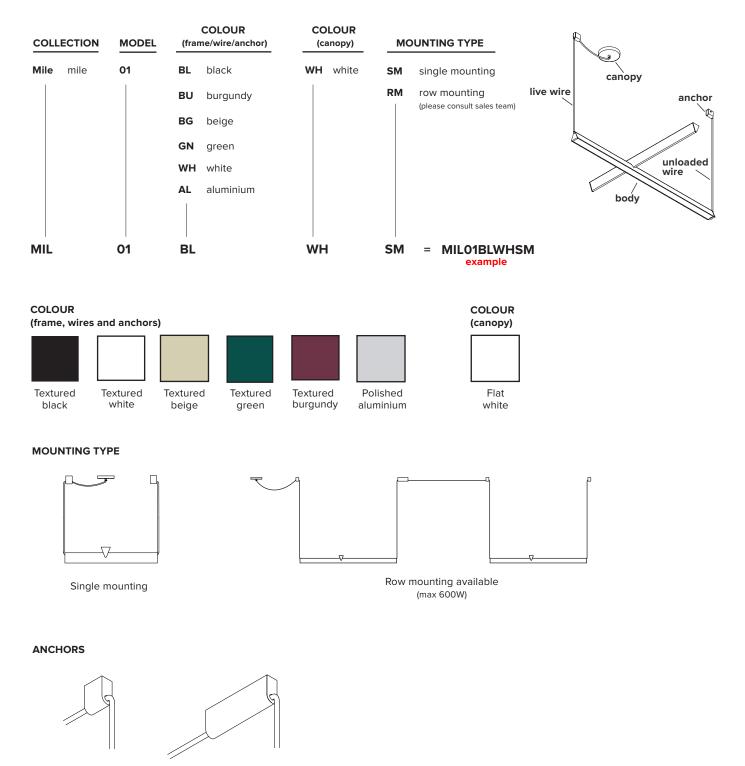

Connecting anchor for row mounting

Regular anchor

lambert&fils

LIGHT SOURCE & DIMMER SPECIFICATIONS

AC LED BOARD

119 W 100V-120V / 240V uplight 2145 lumens downlight 2860 lumens LED 2700K 50 000 H CRI ≥90 2 years warranty 3 SDCM consistency Replacement parts available through Lambert & Fils

DIMMER LIST COMPATIBILITY – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND | MODEL NUMBER | MAX LEVEL | MIN LEVEL | FLICKERING | OVERALL QUOTE |
|------------------|----------------|-----------|-----------|------------|---------------|
| LUTRON - MAESTRO | MAELV-600 | 100% | 10% | 0%-10% | good |
| LUTRON - SKYLARK | SELV-300P | 100% | 10% | no | very good |
| LUTRON - SKYLARK | SELV-303P | 100% | 10% | no | very good |
| LUTRON - SKYLARK | CTELV-303P | 100% | 10% | no | very good |
| LUTRON - DIVA | DVELV-300P | 100% | 10% | no | very good |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100% | 30% | no | good |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.