## lambert&fils

## MILE 01



type: suspension

materials: body: powder coated aluminum lens: frosted polycarbonate

canopy and anchors: powder coated aluminum & steel

wire: polyester

wire length: 108" (274cm) live wire feed

84" (213cm) unloaded wire

weight: 7.2 lb / 3.3 kg
light source: AC LED board

105 W

uplight 1685 lumens / downlight 2243 lumens

LED 2700K 50 000 H CRI ≥90 2 years warranty

3 SDCM consistency 120V / 220-240V

certifications: CE VEOHS IP20

voltage:

dimmer:

**notes:** – must be installed by an electrician

 $- \, \mathsf{LED}$  may only be changed by Lambert & Fils or other


refer to our recommended list of dimmer models


authorized personnel


– additional charges for modifications

or for special orders

- dimensions are approximate and may vary slightly

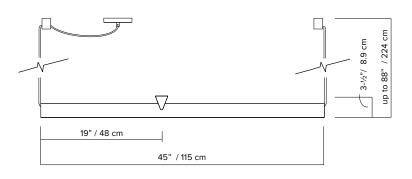




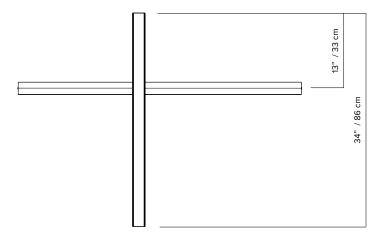


# lambert&fils


## **ORDER GUIDE: SKU**

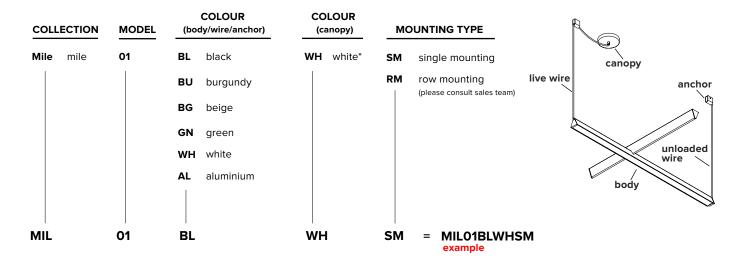






#### **MOUNTING TYPE**

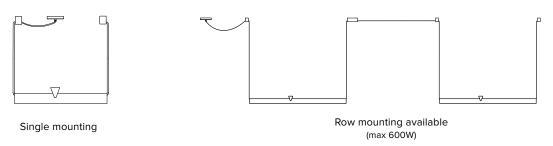

#### **ANCHORS**



# lambert&fils

## **DIMMER SPECIFICATIONS**

## **TESTED DIMMER LIST COMPATIBILITY - 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

<sup>\*</sup>Other dimmers can yield good results and we recommend conducting your own test before final installation.

#### **EU ENERGY LABEL**

