

lambert&fils

MILE 03



type:	suspension					
type.	Suspension	suspension				
materials:	body: lens: hardware: wire:	powder coated aluminum frosted polycarbonate powder coated aluminum & steel polyester				
wire length:	108" live wire feed 84" unloaded wire					
weight:	5.5 lb / 2.5 kg					
light source:	88W (see light source section for specifications)					
voltage:	120V / 240V					
dimmer:	refer to our recommended list of dimmer models					
certifications:	etter to the second sec					
notes:	 must be installed by an electrician additional charges for modifications or for special orders dimensions are approximate and may vary slightly lead time 7-9 weeks 					

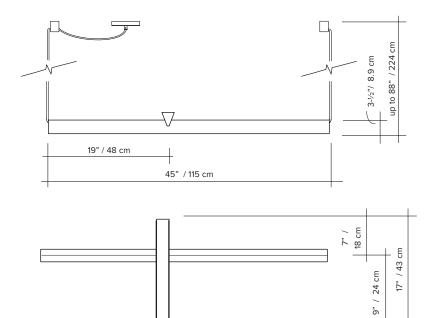




Т

lambert&fils

ORDER GUIDE: SKU

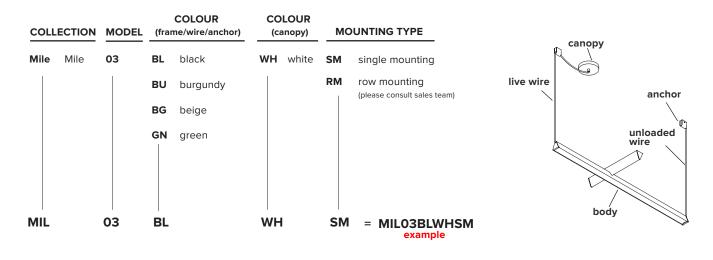

COLOUR COLOUR (frame, wires and anchors) (canopy) Textured Textured Textured Flat Textured black burgundy beige green white MOUNTING TYPE


> Row mounting available (max 600W)

ANCHORS



 ∇

Single mounting



Regular anchor

Connecting anchor for row mounting

lambert&fils

LIGHT SOURCE & DIMMER SPECIFICATIONS

AC LED BOARD

88 W 100V-120V / 240V uplight 1040 lumens downlight 2860 lumens LED 2700K 50 000 H CRI ≥90 2 years warranty 3 SDCM consistency Replacement parts available through Lambert & Fils

DIMMER LIST COMPATIBILITY – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

*Other dimmers can yield good results and we recommand conducting your own test before final installation.