
# lambert&fils


## MILE 03




type:	suspension			
materials:	body: lens: canopy and anchors: wire:	powder coated aluminum frosted polycarbonate powder coated aluminum & steel polyester		
wire length:	108" (274cm) live wire feed 84" (213cm) unloaded wire			
weight:	5.5 lb / 2.5 kg			
light source:	AC LED board 80 W uplight 671 lumens / downlight 2210 lumens LED 2700K 50 000 H CRI ≥90 2 years warranty 3 SDCM consistency			
voltage:	120V / 220-240V			
dimmer:	refer to our recommended list of dimmer models			
certifications:				
	<ul> <li>must be installed by an electrician</li> <li>LED may only be changed by Lambert &amp; Fils or other authorized personnel</li> </ul>			

- authorized personnel – additional charges for modifications
- or for special orders
- dimensions are approximate and may vary slightly

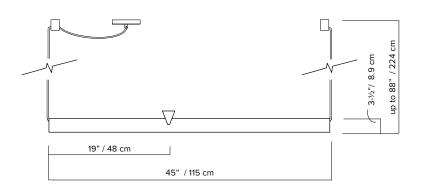


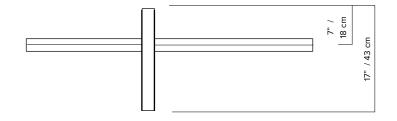





# lambert&fils

### **ORDER GUIDE: SKU**

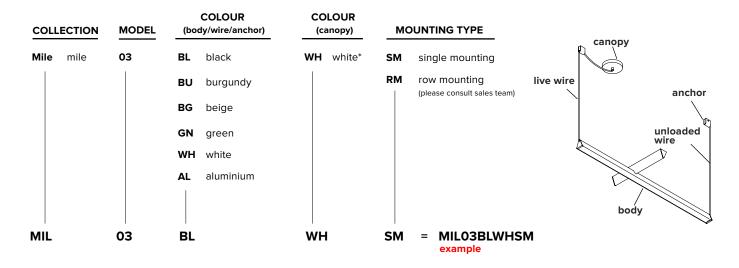

**BODY, WIRES AND ANCHORS** CANOPY \*body colors also available as custom Textured Textured Textured Textured Textured Polished Flat black white beige green burgundy aluminium white MOUNTING TYPE






Single mounting

ow mounting availabl (max 600W)

#### ANCHORS





Regular anchor

Connecting anchor for row mounting

# lambert&fils

## DIMMER SPECIFICATIONS

### **TESTED DIMMER LIST COMPATIBILITY – 120V**

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MAX LEVEL	MIN LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	100%	10%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	100%	10%	no	very good
LUTRON - SKYLARK	SELV-303P	100%	10%	no	very good
LUTRON - SKYLARK	CTELV-303P	100%	10%	no	very good
LUTRON - DIVA	DVELV-300P	100%	10%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	no	good

\*Other dimmers can yield good results and we recommand conducting your own test before final installation.

### **EU ENERGY LABEL**

