

## MILE 04

A collaboration between Lambert & Fils and Guillaume Sasseville, Mile offers a variation on the linear suspension, pared down to its simplest, asymmetrical expression, with two lines floating in surprising equilibrium. Direct and indirect light are separated by a 90° pivot, thus marking out space with light. A play on contrasts, Mile is part art installation and part utilitarian light. The use of linear LED technology and the cords clamped into the structure add to the weightless, almost levitating feel of the lamp.

**type:** suspension

**construction:** powder coated or polished aluminum body  
frosted polycarbonate opal diffuser  
powder coated aluminum canopy, steel anchor  
polyester cord

**specifications:** source: AC LED board  
power consumption:

	A	B	C
LED 2700K	56W 2273 lumens	90W 3410 lumens	105W 3978 lumen
LED 3000K	2478 lumens	2701 lumens	4336 lumens

colour rendering index:  $\geq 90$  CRI  
colour consistency: 3 SDCM  
expected lifetime: 50 000h


**control:** 120-240V on/off, trailing edge (reverse phase)  
refer to our recommended list of dimmer models

**cord length:** unloaded wire 96" / 244cm  
loaded wire 120" / 304cm

**weight:** 4.5lb / 2kg | 6.5lb / 2.9kg | 7lb / 3.2kg

**certifications:**     IP20

**warranty:** 2 years

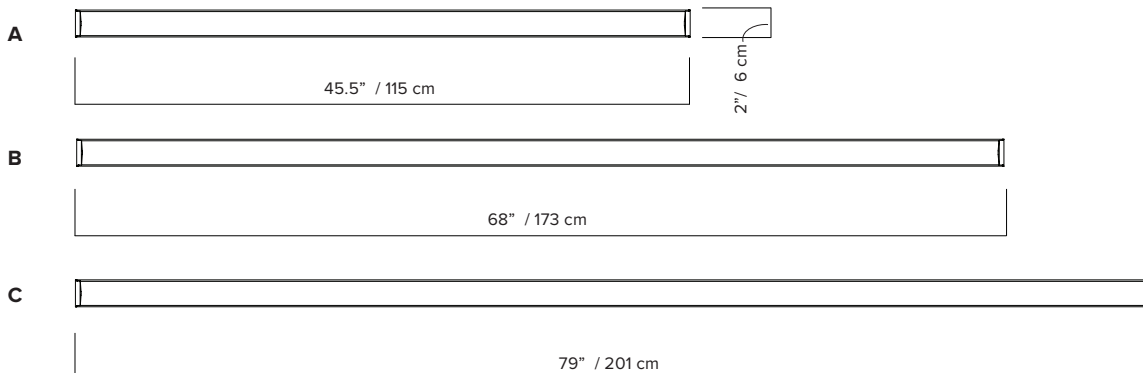


\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION		MODEL	LENGTH		BODY		CORD	
Mile	mile	04	A	3'-9 1/2" / 115 cm	BK	black	BK	black
			B	5'-8" / 173 cm	BU	burgundy	BU	burgundy
			C	6'-7" / 201 cm	BG	beige	BG	beige
					GN	green	GN	green
					WH	white	WH	white
					AL	aluminium	AL	aluminium
<b>MIL</b>		<b>04</b>	<b>A</b>		<b>BK</b>		<b>BK</b>	

CANOPY	COLOUR TEMPERATURE (CCT)	DIMMING	
BK black	WL warm light (2700K)	ZT 0-10V dimming	<b>ZT = MILO4ABKKBKWLZT</b> <b>example</b>
BU burgundy	NL neutral light (3000K)	OT 1-10V dimming	
BG beige	DW dim to warm (2700K to 2200K)	PH phase dimming	
GN green	V varialbe		
WH white			
AL aluminium			
<b>BK</b>	<b>WL</b>	<b>ZT</b>	

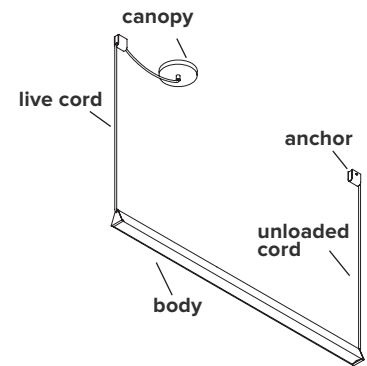

### BODY, CORD AND ANCHOR



### CANOPY



flat white \*body colours also available as custom

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with reverse phase or phase dimming (trailing edge\*\*)

<u>DIMMER BRAND</u>	<u>MODEL NUMBER</u>	<u>MIN LEVEL</u>	<u>MAX LEVEL</u>	<u>FLICKERING</u>	<u>OVERALL QUOTE</u>
LUTRON - MAESTRO	MAELV-600	10%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	10%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	10%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	10%	100%	no	very good
LUTRON - DIVA	DVELV-300P	10%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

