



## MILE 04

A collaboration between Lambert & Fils and Guillaume Sasseville, Mile offers a variation on the linear suspension, pared down to its simplest, asymmetrical expression, with two lines floating in surprising equilibrium. Direct and indirect light are separated by a 90° pivot, thus marking out space with light. A play on contrasts, Mile is part art installation and part utilitarian light. The use of linear LED technology and the cords clamped into the structure add to the weightless, almost levitating feel of the lamp.

**type:** suspension

**construction:** powder coated or polished aluminum body  
powder coated or polished steel anchors  
powder coated steel canopy  
frosted acrylic diffuser  
polyester cord

**specifications:** source: LED array, integrated

power consumption:	120V	230V
<b>A</b>	24W	27W
<b>B</b>	34W	40W
<b>C</b>	40W	

lumen output:

<b>A</b>	LED 2700K	1839lm	2077lm
	LED 3000K	1896lm	2140lm
<b>B</b>	LED 2700K	2706lm	3157lm
	LED 3000K	2709lm	3255lm
<b>C</b>	LED 2700K	3169lm	
	LED 3000K	3267lm	



**control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V: On/Off, Phase Dimming, DALI  
refer to our recommended list of dimmer models

**cord length:** mains/line cord - 120" / 304 cm  
non-electrical cord - 96" / 244 cm

**weight:** A - 3.7 lb - 1.7 kg / B - 4.4 lb - 2 kg / C - 5.2 lb - 2.3 kg

**certifications:**    

**warranty:** 2 years

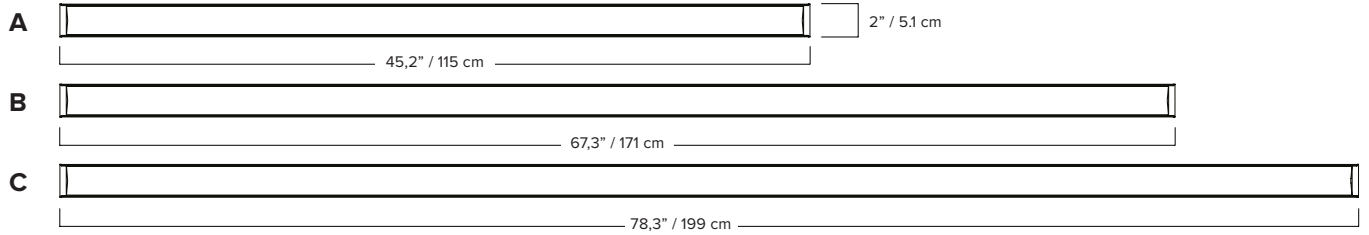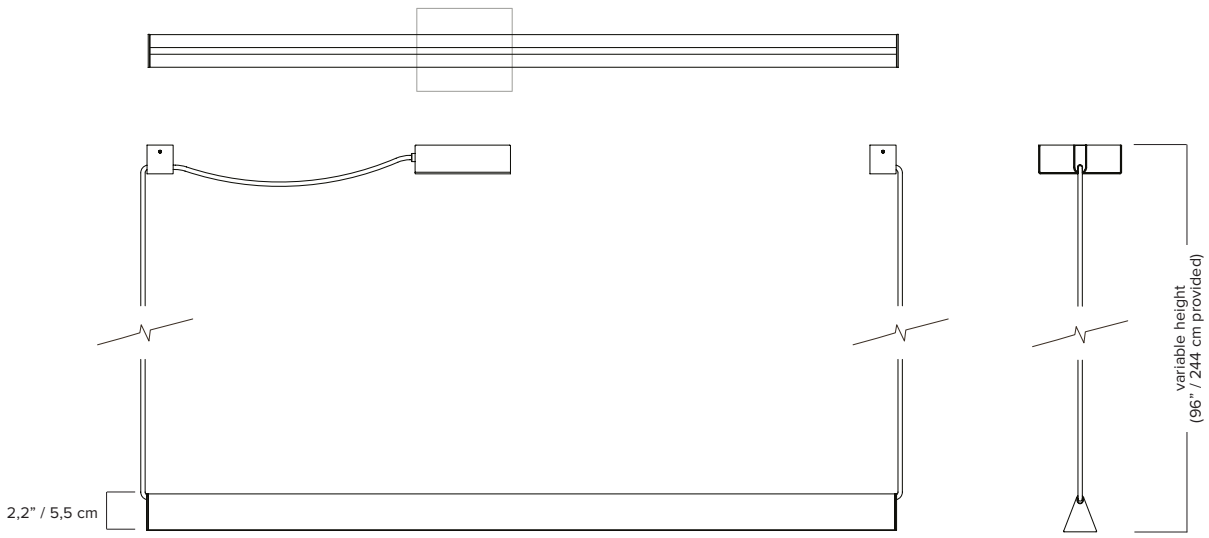

## ORDER GUIDE: SKU

COLLECTION	MODEL	BODY, CORD AND ANCHOR		CANOPY		COLOUR TEMPERATURE (CCT)		DIMMING		
MIL	Mile	04A LV	BK	black	BK	black	WL	warm light (2700K)	ZT	0-10V dimming (120V only)
		04B LV	BG	beige	BG	beige	NL	neutral light (3000K)	PH	phase dimming
		04C LV	BU	burgundy	BU	burgundy	D27	dim to warm (2700K to 2200K)	DA	DALI (230V only)
			GN	green	GN	green	D30	dim to warm (3000K to 2200K)		
			WH	white	WH	white	CCT	other CCT available upon request*		
		AL	aluminum							
MIL	04A LV	BK	BK	WL	ZT	= MIL04ALVBKKBWLZT example				


\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### FINISH



### NOTES

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

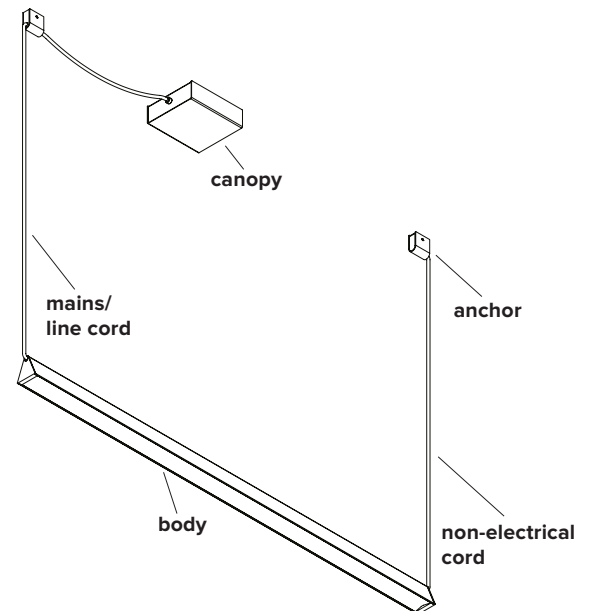

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

#### MILE 04 A

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper	DAL06P	99%	1%	Phase Cut
Cooper	DLC03P	99%	2%	Phase Cut
Cooper	SLC03P	99%	1%	Phase Cut
Leviton	IPE04	99%	7%	Phase Cut
Leviton	IPI06-1LZ	99%	1%	Phase Cut
Leviton	VPE06	99%	10%	Phase Cut
Leviton	6631-2	99%	1%	Phase Cut
Leviton	6633-P	99%	1%	Phase Cut
Leviton	6683-1W	99%	1%	Phase Cut
Lutron	CT103P	99%	10%	Phase Cut
Lutron	DVCL-153P	99%	1%	Phase Cut
Lutron	DV600P	99%	7%	Phase Cut
Lutron	DVELV303P	99%	7%	Phase Cut
Lutron	LG600P	99%	6%	Phase Cut
Lutron	SELV300P	98%	8%	Phase Cut
Lutron	S600P	99%	2%	Phase Cut
Lutron	TGCL-153P	99%	6%	Phase Cut

#### MILE 04 B

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper	SLC03P	98%	1%	Phase Cut
Leviton	IPE04	99%	10%	Phase Cut
Leviton	VPE06	98%	14%	Phase Cut
Lightolier	ZP260QEW	98%	11%	Phase Cut
Lutron	DVELV303P	98%	11%	Phase Cut
Lutron	MAELV600	98%	18%	Phase Cut
Lutron	FAELV500	99%	17%	Phase Cut
Lutron	SELV300P	98%	11%	Phase Cut
Lutron	TGCL-153P	98%	9%	Phase Cut

#### MILE 04 C

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper	DLC03P	100%	2%	Phase Cut
Cooper	SLC03P	100%	1%	Phase Cut
Leviton	IPI06-1LZ	100%	1%	Phase Cut
Leviton	VPE06	100%	10%	Phase Cut
Leviton	6631-2	100%	1%	Phase Cut
Leviton	6633-P	100%	7%	Phase Cut
Leviton	6683-1W	100%	2%	Phase Cut
Lightrolizer	ZP260QEW	100%	5%	Phase Cut
Lutron	DVCL-153P	100%	2%	Phase Cut
Lutron	DVELV303P	100%	9%	Phase Cut
Lutron	DV600P	100%	3%	Phase Cut
Lutron	LG600P	100%	5%	Phase Cut
Lutron	MAELV600	100%	3%	Phase Cut
Lutron	SELV300P	100%	9%	Phase Cut
Lutron	S600P	100%	9%	Phase Cut
Lutron	S-603PG	97%	10%	Phase Cut
Lutron	TG-600P	100%	10%	Phase Cut
Lutron	TGCL-153P	100%	2%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

#### MILE 04 A

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Clipsal	32E450TM	100%	1.4%	Phase Cut
Clipsal	32E450UDM	100%	2.0%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.1%	Phase Cut
ELKO	316GLED	100%	8.8%	Phase Cut
GIRA	117600/I01	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300 RC	100%	2.5%	Phase Cut

#### MILE 04 B

MILE04B is compatible with Trailing edge dimmers only

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Clipsal	32E450TM	100%	25%	Phase Cut
Clipsal	32E450UDM	100%	31%	Phase Cut

#### MILE 04 C

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Clipsal	32E450TM	100%	1.9%	Phase Cut
Clipsal	32E450UDM	100%	2.4%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.3%	Phase Cut
ELKO	316GLED	100%	2.2%	Phase Cut
GIRA	117600/I01	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300 RC	100%	2.3%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

### EU ENERGY LABEL

