








## LAURENT 13

The Laurent Collection distills the milk globe to its essential relationship between circle and sphere. A series of thin forms compliment the Laurent globes—forms that carve through space, moving between line, surface, and volume. These forms combine in endless patterns, making it possible for an installation of Laurent lamps to inhabit any space with subtlety and quiet strength.

<b>type:</b>	suspension
<b>construction:</b>	polished brass, powder coated aluminium or nickel plated steel frame handblown opaline glass globe powder coated aluminium or brass hardware polyester cord
<b>specifications:</b>	source: LED lamp provided (G9 base) power consumption: 9x 4,5W lumen output: 2476lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
<b>control:</b>	refer to our recommended list of dimmer models
<b>cord length:</b>	fixed length to be determined by the client
<b>aircraft cable:</b>	to be determined by the client (adjustable length)- min 4"
<b>weight:</b>	brass/nickel plated: 44.6 lb / 20.2 kg aluminium: 34.5 lb / 15.6 kg
<b>certifications:</b>	    IP20
<b>warranty:</b>	2 years

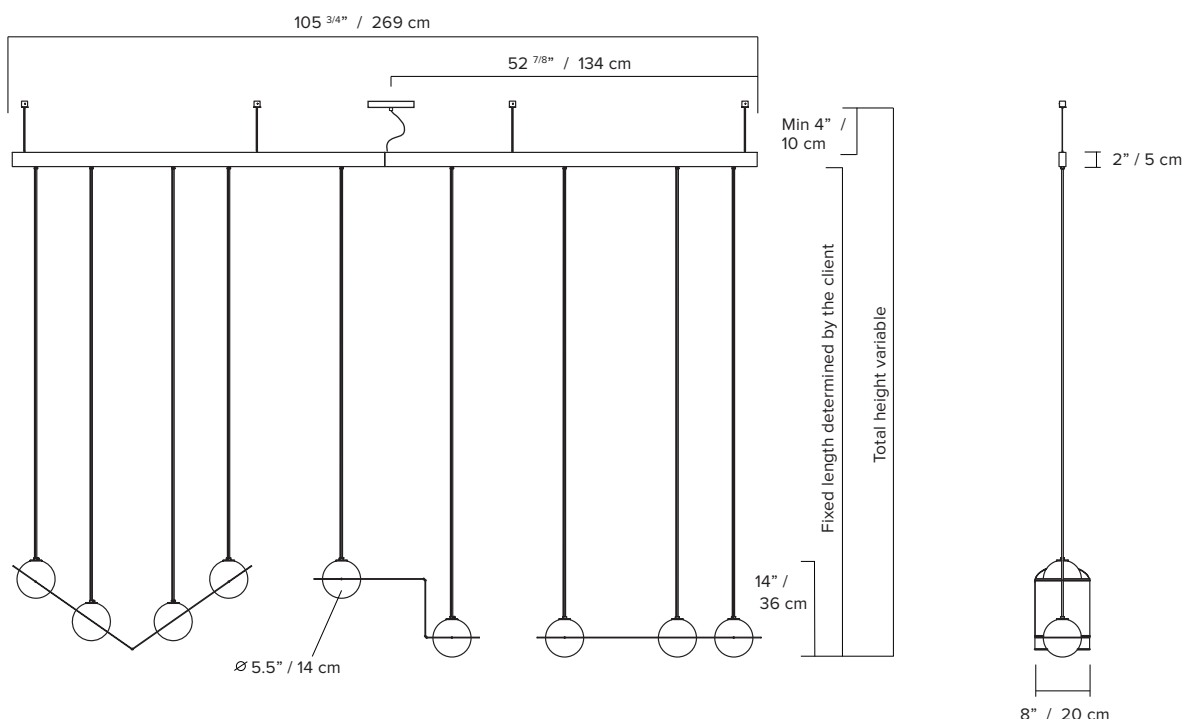



\*dimensions are approximate and may vary slightly


ORDER GUIDE: SKU


COLLECTION		MODEL	FRAME		CORD SYSTEM		PARALLEL BAR		CANOPY/ANCHORS	
LRT	Laurent	13	BK	black	BK	black	BK	black	BK	black
			BR	brass	BR	brass	WH	white	WH	white
			BE	blue	BE	blue	BE	blue	BE	blue
			BU	burgundy	BU	burgundy	BU	burgundy	BU	burgundy
			CH	nickel plated	BG	beige	BG	beige	BG	beige
			TU	turquoise						
LRT		13	BK		BK		BK		BK	= LRT13BKBKBKBK
										example


FRAME


  
textured  
black


  
brass

  
textured  
blue


  
textured  
burgundy


  
nickel  
plated


  
textured  
turquoise





CORD SYSTEM FINISH  
globe holders & cords


  
textured  
black

  
brass


  
textured  
blue


  
textured  
burgundy


  
textured  
beige

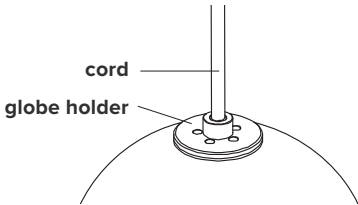



PARALLEL BAR  
black, white or same colour as cord system


  
textured  
black

  
textured  
white


  
textured  
blue

  
textured  
burgundy

  
textured  
beige

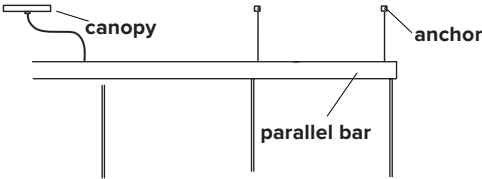


CANOPY and ANCHORS  
black, white or same colour as parallel bar

  
textured  
black

  
textured  
white

  
textured  
blue

  
textured  
burgundy

  
textured  
beige

## DIMMER SPECIFICATIONS

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

## EU ENERGY LABEL

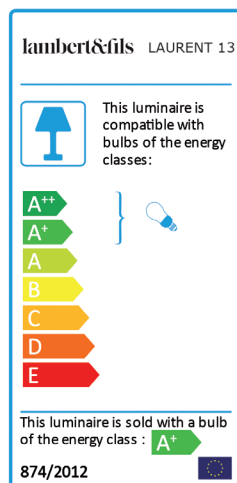

### NOTES:

- must be installed by an electrician
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions