





# DORVAL 01




Based on CLUZEL / PLUCHON's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

<b>TYPE</b>	Pendant
<b>CONSTRUCTION</b>	Polished aluminum body, head and canopy Clear prismatic PMMA lens Polyester cord, steel cord for aluminum finish
<b>SPECIFICATIONS</b>	Source: LED array, integrated Power consumption: 36W Color temperature: 3000K 2700K dim to warm 3000k to 2200k dim to warm 2700k to 2200k Lumen output: 3000K - 3106 lm 2700K - 2888 lm Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h
<b>CONTROL</b>	120/277V on/off, 0-10V or phase dimming (120V only) 220-240V on/off or trailing edge dimming only Refer to our recommended list of dimmer models
<b>CORD LENGTH</b>	108" / 275cm
<b>WEIGHT</b>	11.5lb / 5.2kg
<b>CERTIFICATIONS</b>	    IP20
<b>WARRANTY</b>	2 years

## NOTES

- The canopy can be offset from composition.
- Luminaire total height (ceiling to lowest point of luminaire).  
Min - 26" / 66 cm  
Max - 126" / 320 cm
- \*For any height outside these parameters, contact Lambert & Fils.
- Luminaire height is adjustable on site.
- Luminaire cannot be installed on a slanted ceiling.
- Dimensions are approximate and may vary slightly.

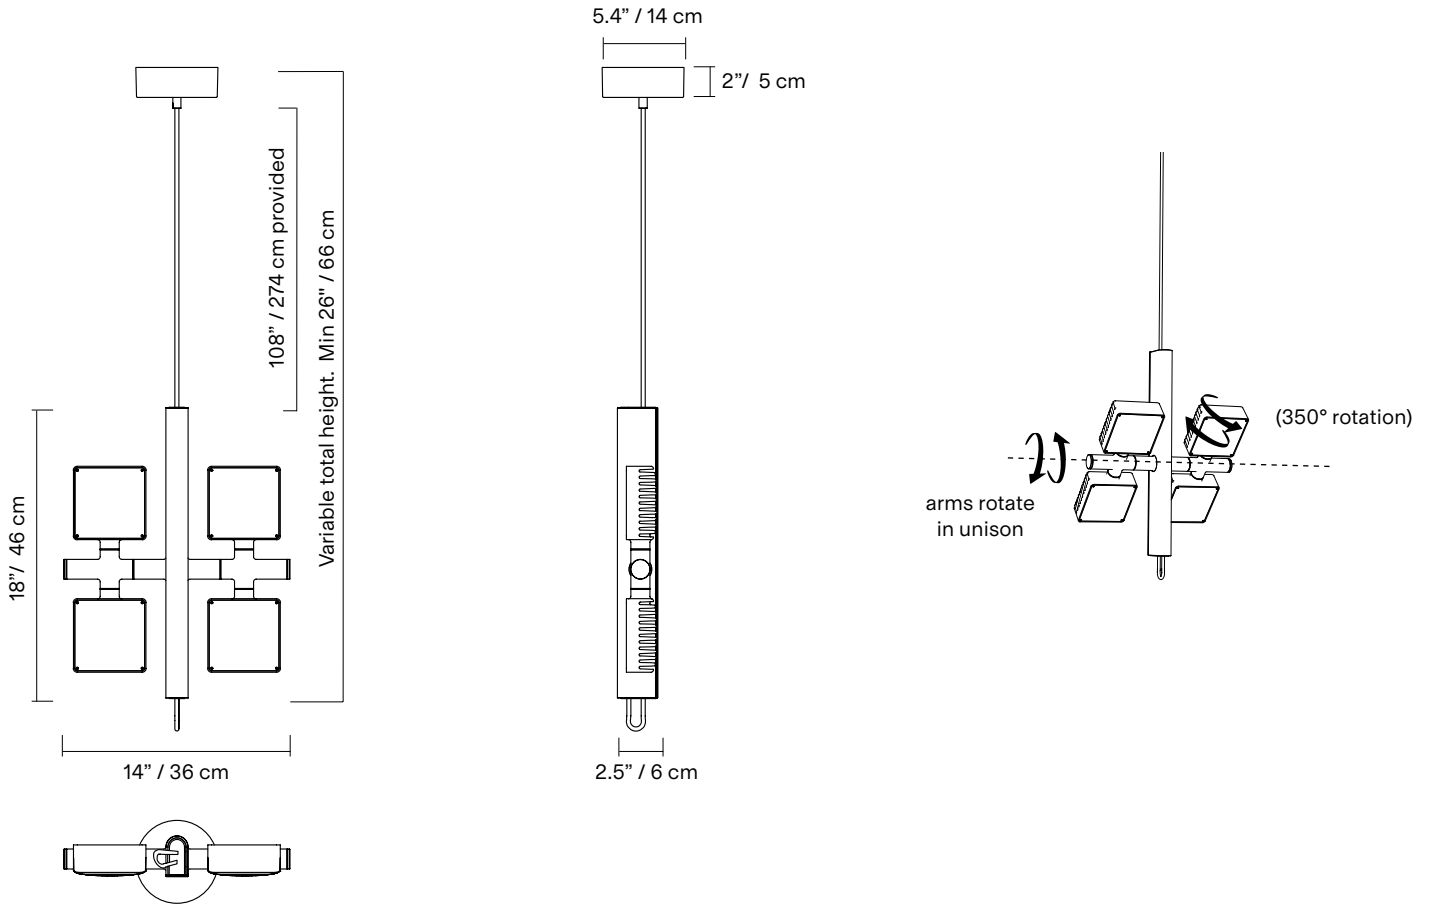

## BODY, CORD AND LOOP



**BK**  
Textured  
black



**WH**  
Textured  
white



**MB**  
Textured  
midnight  
blue



**BG**  
Textured  
beige



**AL**  
Polished  
aluminum

## CANOPY



**BK**  
Textured  
black



**WH**  
Textured  
white



**MB**  
Textured  
midnight  
blue



**BG**  
Textured  
beige




**AL**  
Polished  
aluminum

## NOTES

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- offset available upon request
- not to be suspended by a hook
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

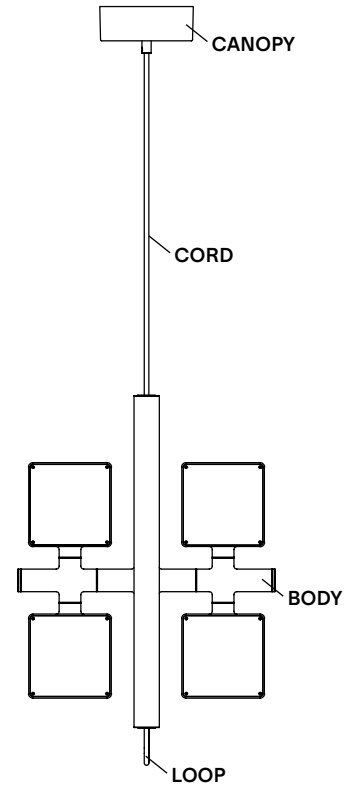

		Example	Fill with your selection
<b>COLLECTION</b>	<b>DORVAL</b> Dor	DOR	DOR
<b>MODEL</b>	<b>01</b>	01	01
<b>BODY, CORD AND LOOP</b>	<b>BK</b> Textured Black <b>WH</b> Textured White <b>MB</b> Textured Midnight Blue <b>BG</b> Textured Beige <b>TC</b> Textured Terracotta <b>AL</b> Aluminum	BK	
<b>CANOPY</b>	<b>BK</b> Textured Black <b>WH</b> Textured White <b>MB</b> Textured Midnight Blue <b>BG</b> Textured Beige <b>TC</b> Textured Terracotta <b>AL</b> Aluminum	BK	
<b>COLOR TEMPERATURE (CCT)</b>	<b>F22</b> Fixed 2200K <b>F27</b> Fixed 2700K <b>F30</b> Fixed 3000K <b>D27</b> Dim to warm 2700K-2200K <b>D30</b> Dim to warm 3000K-2200K <b>CCT</b> Other CCT available upon request *	F22	
<b>DIMMING</b>	<b>ZT</b> 0-10V dimming <b>PH</b> Phase dimming	ZT	
<b>FULL SKU</b>		DOR01BKBKF22ZT	
		<b>NOTES</b>	

\*Custom colour available upon request. Material library on website.

\*\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively.  
Not available with Dim-to-Warm feature.

## TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON	DVELV303P	100%	9%	Phase Cut
LUTRON	MAELV600	100%	3%	Phase Cut
LUTRON	SELV300P	100%	9%	Phase Cut
LUTRON	CTELV-303P	100%	5%	Phase Cut
LUTRON	CTRP-253P	100%	5%	Phase Cut
LUTRON	PD-5NE	100%	7%	Phase Cut
LUTRON	DVRP-253P	100%	5%	Phase Cut
LUTRON	MA-PRO	100%	6%	Phase Cut
LUTRON	NTRP-250	100%	8%	Phase Cut
LUTRON	NTELV-300	100%	9%	Phase Cut

## TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase dimming (trailing edge only\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
CLIPSAL	32E450UDM	100%	31%	Phase Cut
CLIPSAL	32E450TM	100%	25%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

---

Some dimmers require a minimum load, check specifications.

---

\*Other dimmers that specify LED lamp compatibility may operate without issue.

---

We recommend conducting your own test before final installation.

---

\*\*Leading edge is also known as TRIAC or Forward Phase.

---

Trailing edge is also known as ELV or Reverse Phase.

---