

# Hutchison 02

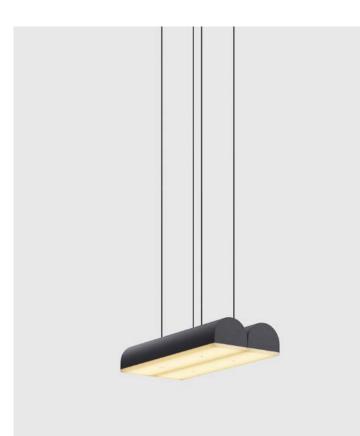

Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs


ТҮРЕ	Suspension		
CONSTRUCTION	Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord		
SPECIFICATIONS	Source: LED array, integrated Power consumption: 10.7W Lumen output: 3000K - 851lm 2700K - 774lm		
	Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h		
CONTROL	120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming		
CORD LENGTH	108" / 275 cm		
WEIGHT	3.4lbs / 1.6Kg		
CERTIFICATIONS	الا المعادية المعادية (CE المحمد ا		
WARRANTY	2 years		

## Spec Drawings

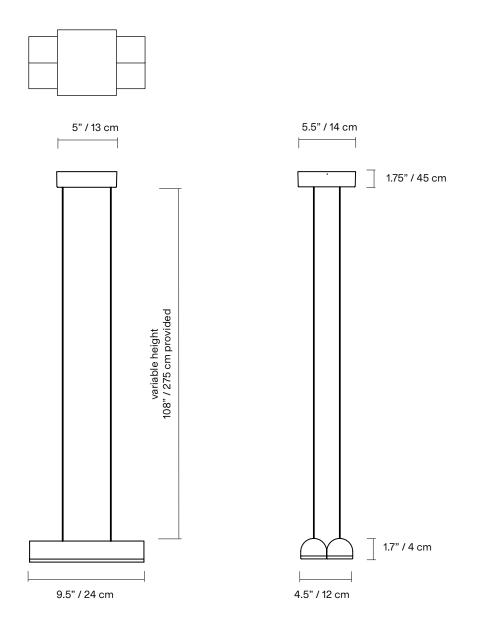

\*dimensions are approximate and may vary slightly


### lambert&fils

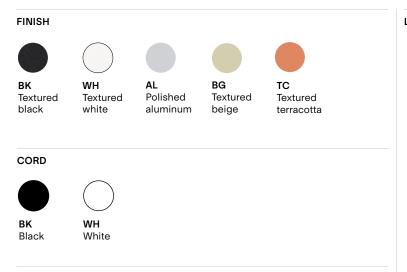

#### NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions



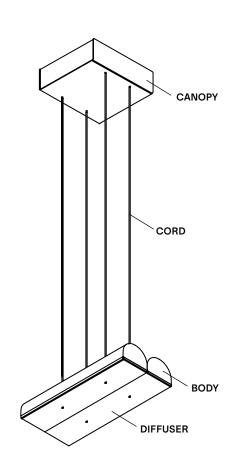

#### Order Guide: SKU

		Example	Fill with your selection
COLLECTION	HUT Hutchison	HUT	НИТ
MODEL	02	02	02
BODY	BKTextured blackWHTextured whiteALPolished aluminumBGTextured beigeTCTextured terracottaCCCustom colour*	ВК	
CORD	BK Black WH White	ВК	
CANOPY	BKTextured blackWHTextured whiteBGTextured beigeTCTextured terracottaCCCustom colour**	ВК	
COLOUR TEMPERATURE (CCT)	WLWarm light (2700K)NLNeutral light (3000K)D27Dim to warm (2700K-2200K)D30Dim to warm (3000K-2200K)CCTOther CCT available upon request**	WL	
DIMMING	<b>ZT</b> 0-10V (120VAC only) <b>PH</b> Phase dimming	ZT	
FULL SKU		HUT02BKBKBKWLZT	
		NOTES	

\*Custom colour available upon request. Material library on website. \*\*Specific CCT selection only available in 100k increments, from 2200K to 4000K

inclusively and not available with Dim-to-Warm feature.