Hutchison 02




Hutchison is the thoughtful study of soft curves and hard lines—a rivalry of vertical and horizontal forces and a play of scale and repetition. Alone, it self-defines as a frank, decorative pendant light. In multiples, it evokes the iconic patterns of Middle Eastern archways and Roman terracotta roofs

Suspension		
Powder coated or polished aluminum body PMMA frosted diffuser Polyester cord		
Source: LED array, integrated Power consumption: 10.7W Lumen output: 3000K - 851Im 2700K - 774Im		
Colour rendering index: ≥90 CRI Colour consistency: 3 SDCM Expected lifetime: ≥50 000h		
120/277V on/off, 0-10V, or phase dimming (120V only) 220-240V: On/Off, Phase Dimming		
108" / 275 cm		
3.4lbs / 1.6Kg		
°® (€ CA ⊀oHS & IP20		
2 years		

NOTES

- Luminaire total height (ceiling to lowest point of luminaire). (108 "/ 274 cm wires provided)
 - Min 8" / 20 cm
 - Max 112" / 284 cm + variable
 - *For any height outside these parameters, contact Lambert & Fils
- · Luminaire height is adjustable on site
- Luminaire cannot be installed on a slanted ceiling
- Dimensions are approximate and may vary slightly

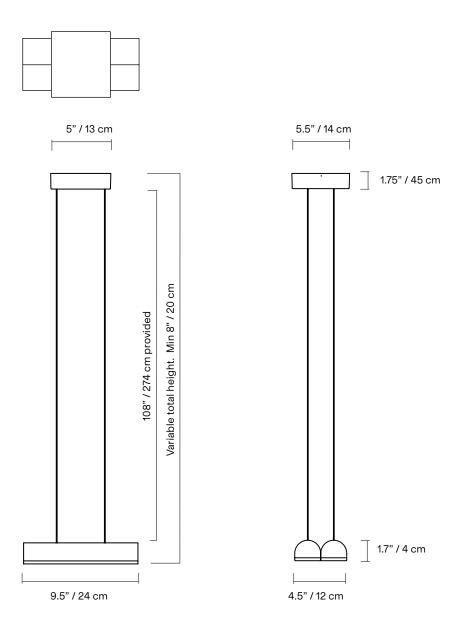

FINISH











AL Polished aluminum



Textured beige



Textured terracotta

CORD






BK Black

WH White

NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Offset option available upon request
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

LAMP ANATOMY

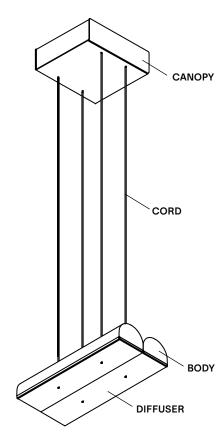

		Example	Fill with your selection
COLLECTION	HUT Hutchison	HUT	нит
MODEL	02	02	02
BODY	BK Textured black WH Textured white AL Polished aluminum BG Textured beige TC Textured terracotta CC Custom colour*	вк	
CORD	BK Black WH White	ВК	
CANOPY	BK Textured black WH Textured white BG Textured beige TC Textured terracotta CC Custom colour**	вк	
COLOUR TEMPERATURE (CCT)	WL Warm light (2700K) NL Neutral light (3000K) D27 Dim to warm (2700K-2200K) D30 Dim to warm (3000K-2200K) CCT Other CCT available upon request**	WL	
DIMMING	ZT 0-10V (120VAC only) PH Phase dimming	ZT	
FULL SKU		HUT02BKBKBKWLZT	
		NOTES	

^{*}Custom colour available upon request. Material library on website.

**Specific CCT selection only available in 100k increments, from 2200K to 4000K inclusively and not available with Dim-to-Warm feature.