






# PARC 04




Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.

<b>TYPE</b>	Pendant
<b>CONSTRUCTION</b>	Hand blown frosted glass Powder coated aluminum body Polyester cord
<b>SPECIFICATIONS</b>	Source: LED lamp provided (G9 base) Power consumption: 3x 4.5W Lumen output: 957lm  Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 15 000h
<b>CONTROL</b>	Refer to our recommended list of dimmer models
<b>CORD LENGTH</b>	108" / 274 cm
<b>STAINLESS STEEL CABLE</b>	96" / 244 cm
<b>WEIGHT</b>	3.5lb / 1.6kg
<b>CERTIFICATIONS</b>	    IP20 
<b>WARRANTY</b>	2 years

## NOTES

- Luminaire total height (ceiling to lowest point of luminaire). (96" / 244 cm aircraft cable provided with anchor)  
Min - 20" / 51 cm  
Max - 110" / 279 cm with anchor.  
\*For any height outside these parameters, contact Lambert & Fils
- Luminaire height is adjustable on site
- Luminaire can be installed on a slanted ceiling - 45° or less, contact Lambert & Fils
- Dimensions are approximate and may vary slightly

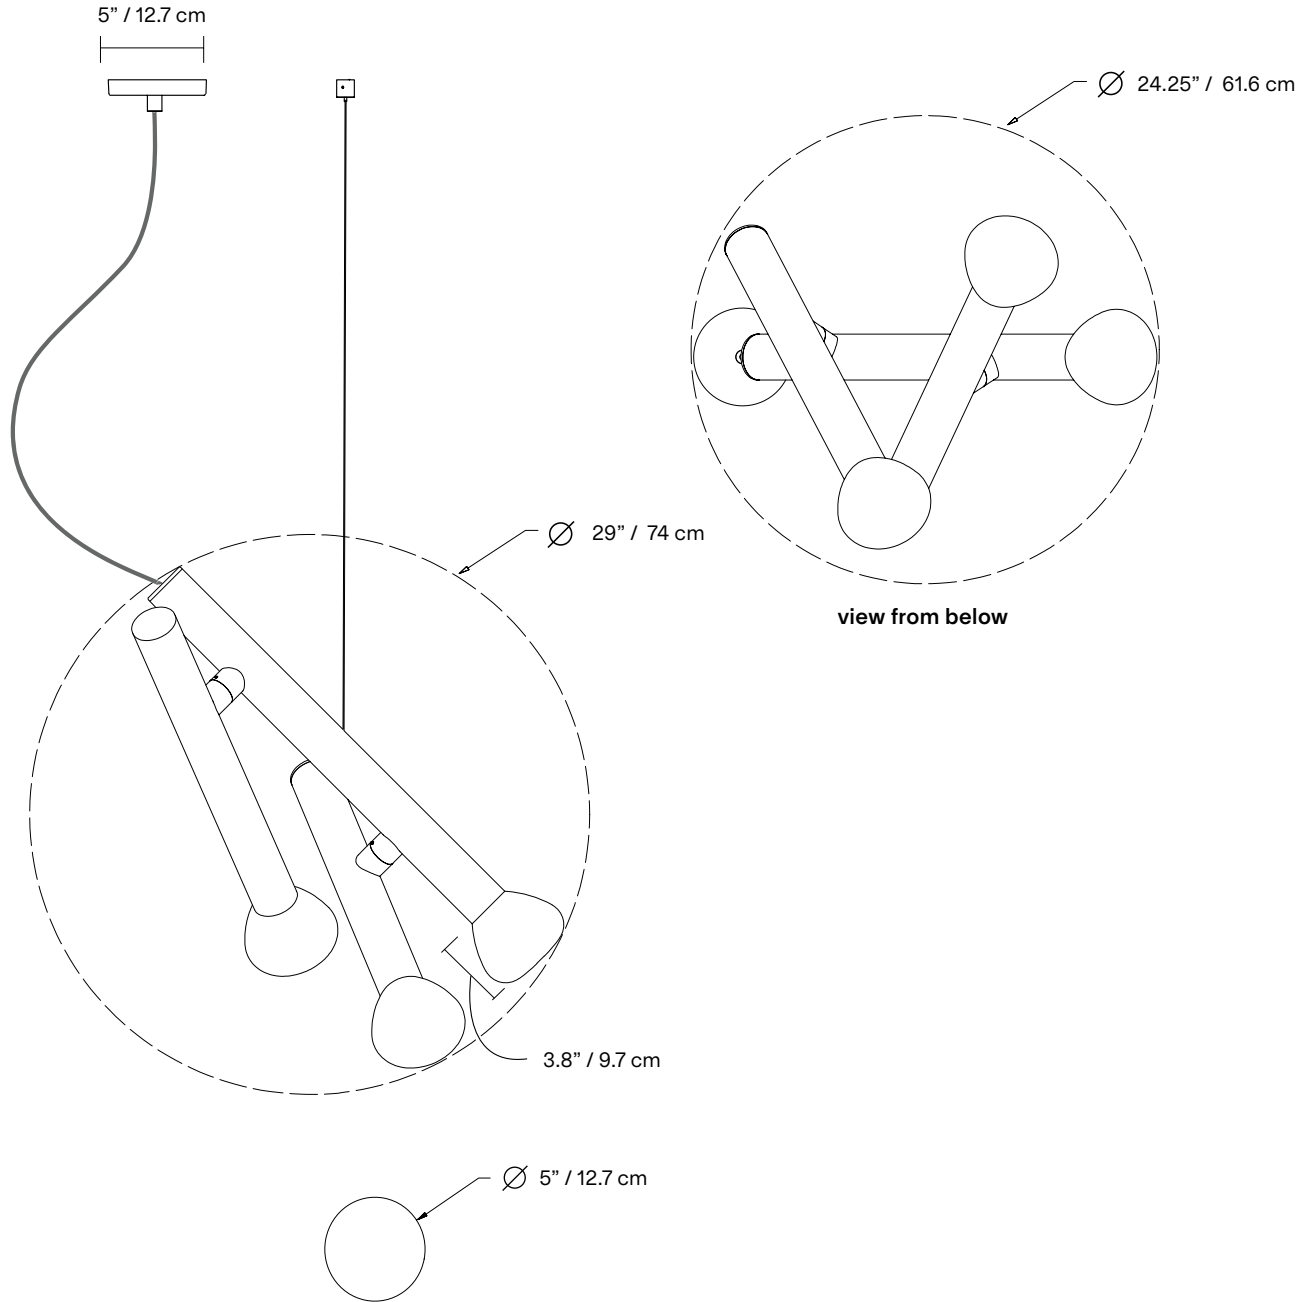

## FINISH



**BK**  
Textured  
black



**WH**  
Textured  
white



**MB**  
Textured  
midnight  
blue



**BG**  
Textured  
beige



**BU**  
Textured  
burgundy



**GN**  
Textured  
green



**TC**  
Textured  
terracotta

## CORD

(\*CORDS ONLY AVAILABLE IN BLACK OR WHITE VINYL FOR AUSTRALIA)



**BK**  
Black



**WH**  
White



**MB**  
Midnight  
blue



**BG**  
Beige




**BU**  
Burgundy



**GN**  
Green

## ANCHORS


Swivel option available for slanted ceilings (45 ° max angle)



## NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- Ceiling anchor not meant for slanted ceilings (available upon request)

## LAMP ANATOMY

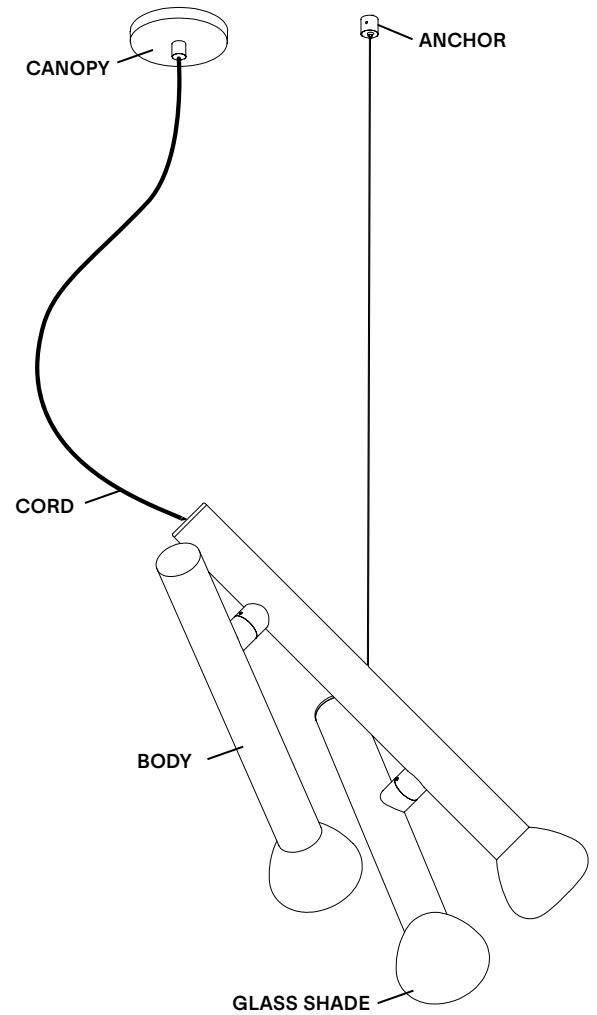

		Example	Fill with your selection
<b>COLLECTION</b>	<b>PARC</b> Prc	<b>PRC</b>	<b>PRC</b>
<b>MODEL</b>	<b>04</b>	<b>04</b>	<b>04</b>
<b>BODY</b>	<b>BK</b> Textured Black <b>WH</b> Textured White <b>MB</b> Textured Midnight Blue <b>BG</b> Textured Beige <b>BU</b> Textured Burgundy <b>GN</b> Textured Green <b>TC</b> Textured Terracotta <b>CC</b> Custom colour*	<b>BK</b>	
<b>CORD</b>	<b>BK</b> Black <b>WH</b> White <b>MB</b> Midnight Blue <b>BG</b> Beige <b>BU</b> Burgundy <b>GN</b> Green <b>CC</b> Custom colour*	<b>BK</b>	
<b>CANOPY AND ANCHOR</b>	<b>BK</b> Textured Black <b>WH</b> Textured White <b>MB</b> Textured Midnight Blue <b>BG</b> Textured Beige <b>BU</b> Textured Burgundy <b>GN</b> Textured Green <b>TC</b> Textured Terracotta <b>CC</b> Custom colour*	<b>BK</b>	
<b>FULL SKU</b>		<b>PRC04BKBK</b>	
		<b>NOTES</b>	

\*Custom colour available upon request. Material library on website.

## DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
LUTRON - MAESTRO	MAELV-600	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	SELV-300P	100%	0%	Phase Cut
LUTRON - SKYLARK	CTELV-303P	100%	0%	Phase Cut
LUTRON - DIVA	DVELV-300P	100%	0%	Phase Cut
LEGRAND - ADORNE	TRUE UNIVERSAL	100%	30%	Phase Cut

## DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge\*\*)

DIMMER BRAND	MODEL	MAX LEVEL	MIN LEVEL	DIMMING PROTOCOL
VARILIGHT	V-PRO	100%	2%	Phase Cut
LEGRAND - NILOÉ	3 996 35	87%	15%	Phase Cut
NIKO	310-0280X	94%	5%	Phase Cut
NIKO	310-0190X	100%	1%	Phase Cut

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

---

Some dimmers require a minimum load, check specifications.

---

\*Other dimmers that specify LED lamp compatibility may operate without issue.

---

We recommend conducting your own test before final installation.

---

\*\*Leading edge is also known as TRIAC or Forward Phase.

---

Trailing edge is also known as ELV or Reverse Phase.