







Side A




Side B

## SAINTE 09

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

<b>type:</b>	suspension
<b>construction:</b>	aluminum polished light block and ceiling anchors laminated glass body nylon ribbon PMMA frosted diffuser
<b>specifications:</b>	source: LED array, integrated power consumption: 15.4 W colour temperature 2700k, 3000k, dim to warm. see order guide colour rendering index: ≥90 CRI colour consistency: 3 SDCM expected lifetime: 50 000h
<b>control:</b>	120-277V: On/Off, 0-10V, Phase Dimming (120V only) 220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only) refer to our recommended list of dimmer models
<b>ribbon length:</b>	20' / 610 cm, width: 3" / 7.6 cm
<b>weight:</b>	31 lb / 14.1 kg
<b>certifications:</b>	   
<b>warranty:</b>	2 years


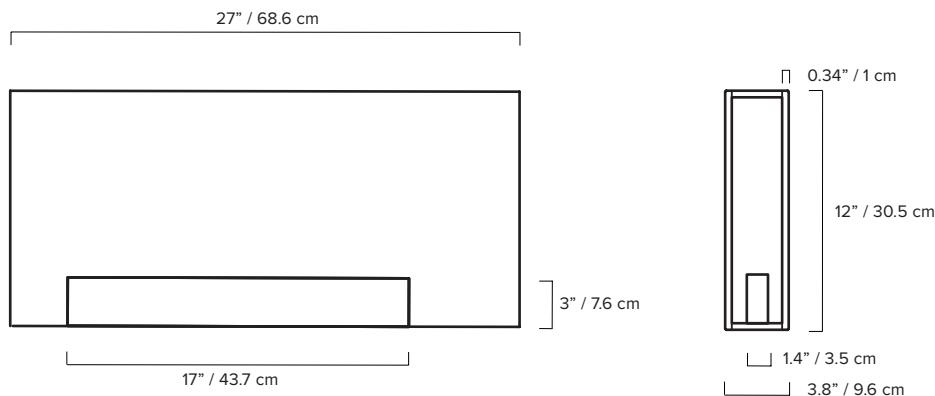


## ORDER GUIDE: SKU


COLLECTION		MODEL	GLASS BODY ( Side A and Side B )	
SNT	sainte	09	LPFG	light peach, frosted grey
			*CC	custom colour
SNT		09	LPFG	

NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)	CONTROL
BK black	BK black	WL warm light (2700K)	ZT 0-10V dimming
	WH white	NL neutral light (3000K)	OT 1-10V dimming
		DW dim to warm (2700K to 2200K)	PH phase dimming
		V variable	
BK	BK	WL	ZT = SNT09L

**ZT = SNT09LPFGBKBKWLZT**  
example

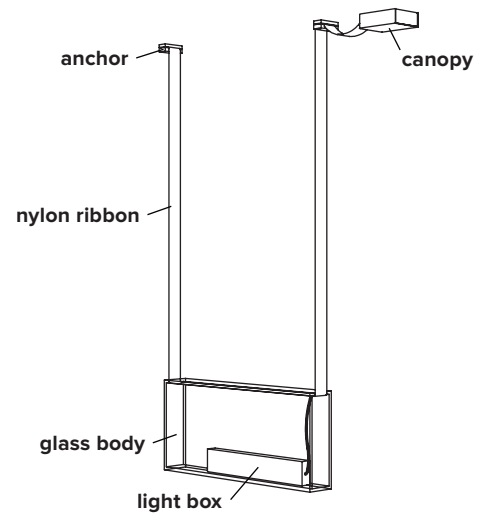


**GLASS BODY**  
(\*Custom colours available upon request)



## NYLON RIBBON



## MOUNTING OPTIONS

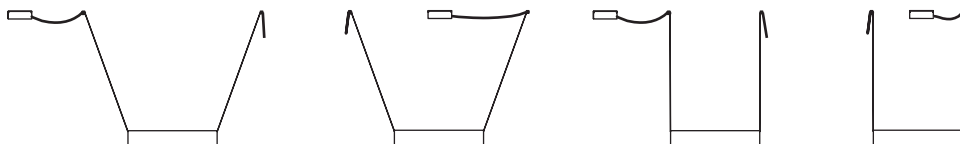

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Compatible with 0-10V, Phase dimming (trailing edge only\*\*)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

\*Other dimmers can yield good results and we recommend conducting your own test before final installation

\*\*Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

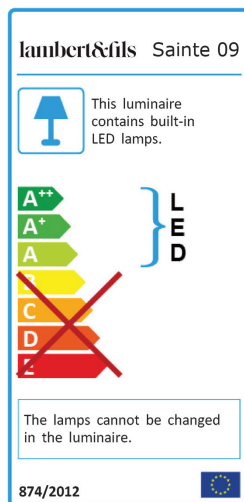

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions