









SAINTE 05

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

| | |
|------------------------|---|
| type: | suspension |
| construction: | aluminum polished light block and ceiling anchors float glass body nylon ribbon PMMA frosted diffuser |
| specifications: | source: LED array, integrated power consumption: 11W colour temperature 2700k, 3000k, dim to warm. see order guide colour rendering index: ≥90 CRI colour consistency: 3 SDCM expected lifetime: 50 000h |
| control: | 120-277V: On/Off, 0-10V, Phase Dimming (120V only) 220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only) refer to our recommended list of dimmer models |
| ribbon length: | 20' / 610 cm, width: 1.5" / 3.8 cm |
| weight: | 15.1 lb / 6.8 kg |
| certifications: |     IP20 |
| warranty: | 2 years |




Canopy
W: 5" / 12.7 cm
L: 7" / 17.8 cm
H: 1.7" / 4.3 cm

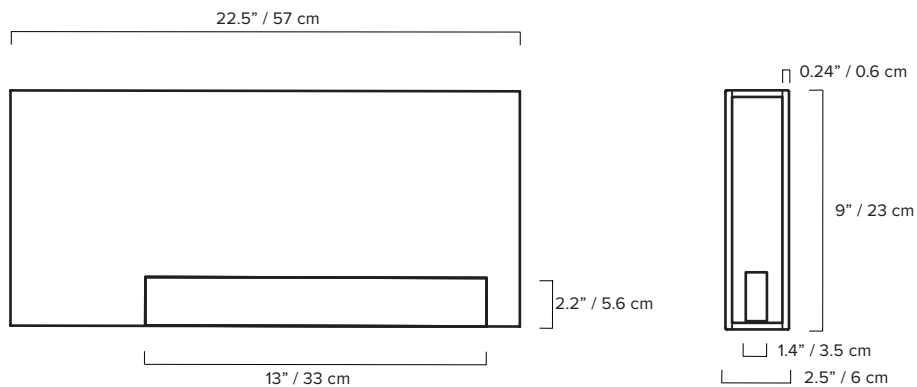


ORDER GUIDE: SKU

| COLLECTION | MODEL | GLASS BODY SIDE A | GLASS BODY SIDE B |
|------------|-------|-------------------------------|-------------------------------|
| STE sainte | 05 | BK black | BK black |
| | | GY grey | GY grey |
| | | EC extra clear | EC extra clear |
| | | GN green | GN green |
| | | BZ bronze | BZ bronze |
| | | FG frosted grey | FG frosted grey |
| | | FC frosted extra clear | FC frosted extra clear |
| STE | 05 | BK | BK |

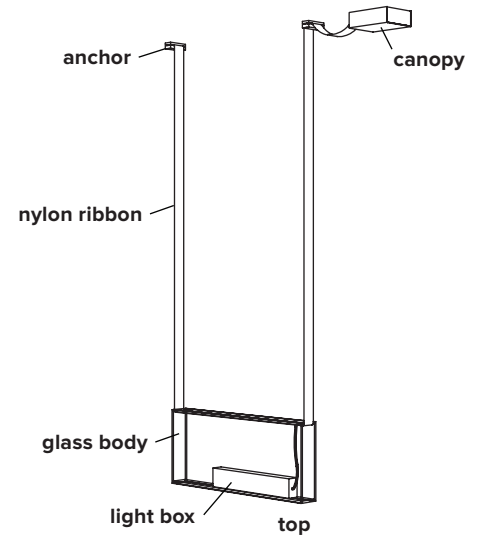


| NYLON RIBBON | CANOPY | COLOUR TEMPERATURE (CCT) | CONTROL |
|-----------------|-----------------|---|-------------------------|
| BK black | BK black | WL warm light (2700K) | ZT 0-10V dimming |
| BG beige | WH white | NL neutral light (3000K) | OT 1-10V dimming |
| | | D27 dim to warm (2700K to 2200K) | PH phase dimming |
| | | D30 dim to warm (3000K to 2200K) | |
| | | V variable | |
| BK | BK | WL | ZT |

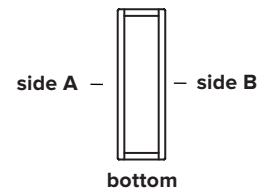


Top and bottom of glass are always ultraclear and not available in color

ZT = **STE05BKBKWBKWLZT**
example


GLASS BODY

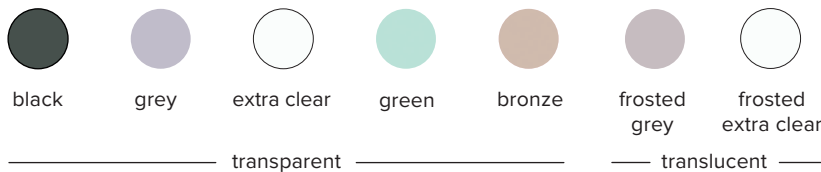

NYLON RIBBON



MOUNTING OPTIONS

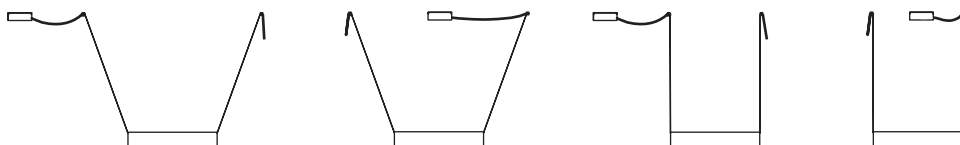

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

| Dimmer brand | Model | Dimmer protocol | Min level | Max level |
|--------------|-----------|-----------------|-----------|-----------|
| Lutron | TGCL-153P | Phase dimming | 14% | 98% |
| Leviton | VPE06 | Phase dimming | 14% | 98% |
| Lutron | DVELV303P | Phase dimming | 11% | 98% |
| Lutron | SELV300P | Phase dimming | 11% | 98% |
| Lightolier | ZP260QEW | Phase dimming | 11% | 98% |
| Lutron | FAELV500 | Phase dimming | 17% | 99% |
| Lutron | MAELV600 | Phase dimming | 18% | 98% |

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 1-10V, Phase dimming (trailing edge only**)


| Dimmer brand | Model | Dimmer protocol | Min level | Max level |
|--------------|-----------|-----------------|-----------|-----------|
| Clipsal | 32E450UDM | Phase dimming | 31% | 100% |
| Clipsal | 32E450TM | Phase dimming | 25% | 100% |

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

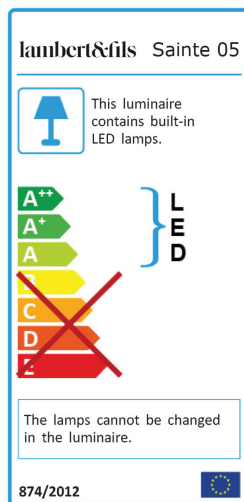

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions