








SAINTE 06

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any height, at a specified angle, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.


- type:** suspension
- construction:** aluminum polished light block, glass anchor system and ceiling anchors
polyester laminated glass (one side)
nylon ribbon
PMMA frosted diffuser
- specifications:** source: LED array, integrated
power consumption: 26.8W
colour temperature 2700K, 3000K, dim to warm.
see order guide
lumen output: 2700K - 1217lm
colour rendering index: ≥ 90 CRI
colour consistency: 3 SDCM
expected lifetime: $\geq 50\ 000$ h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, Phase Dimming, DALI
refer to our recommended list of dimmer models
- ribbon length:** 10' / 305 cm each side, width: 1.5" / 3.8 cm
- weight:** 41.8 lb / 18.6 kg
- certifications:**     IP20
- warranty:** 2 years

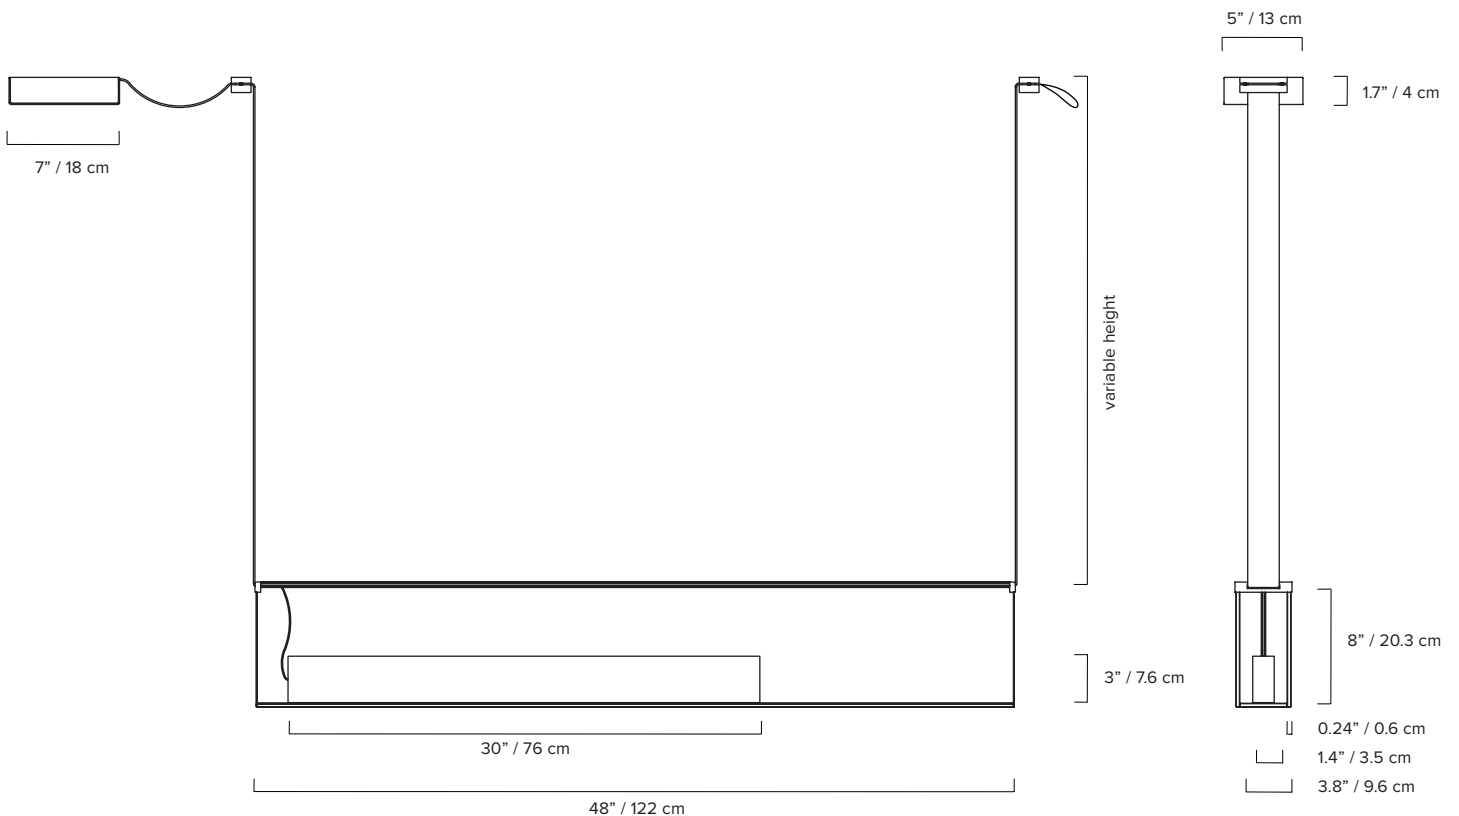


*dimensions are approximate and may vary slightly

ORDER GUIDE: SKU

COLLECTION	MODEL	GLASS BODY (Side A and Side B)	NYLON RIBBON
STE	sainte	06	
		PLSH plum, shadow	BK black
		COLI cognac, licorice	
		LFLF leaf, leaf	
		DVDV dove, dove	
		RUMI ruby, mist	
		PLMI plum, mist	
		*CC custom colour	
STE	06	YEFY	BK

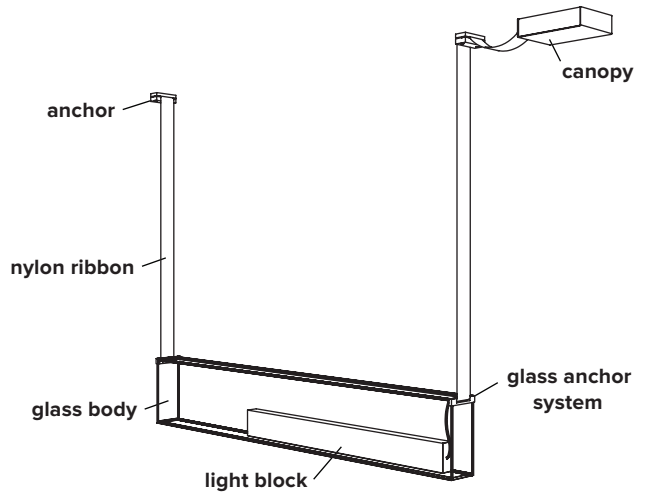

CANOPY	COLOUR TEMPERATURE (CCT)	CONTROL
BK black	WL warm light (2700K)	ZT 0-10V dimming (120V only)
WH white	NL neutral light (3000K)	PH phase dimming
	D27 dim to warm (2700K to 2200K)	DA DALI (220-240V only)
	D30 dim to warm (3000K to 2200K)	
	CCT Other CCT available upon request*	
BK	WL	ZT = STE06PLSHBKBKWLZT



Top and bottom of glass are always ultraclear and not available in colour

*Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.


GLASS BODY (*Custom colours available upon request)



NYLON RIBBON



MOUNTING OPTIONS

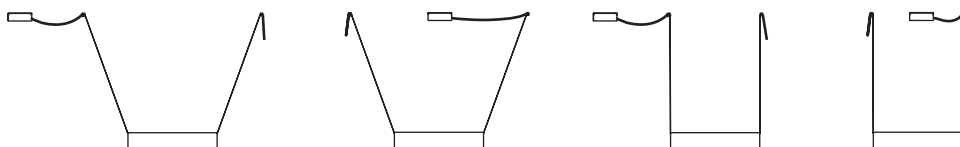

Must be installed at 20 degrees or less.

TESTED DIMMER COMPATIBILITY LIST - 120V*

Phase cut dimming (leading edge or trailing edge**)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper/Eaton	DAL06P	100%	0%	Phase Cut
Cooper/Eaton	DLC03P	100%	4%	Phase Cut
Cooper/Eaton	SLC03P	100%	1%	Phase Cut
Leviton	IPE04-1LZ	100%	7%	Phase Cut
Leviton	IPI06-1LZ	100%	0%	Phase Cut
Leviton	VPE06-1LZ	100%	10%	Phase Cut
Lutron	DVCL-153P	100%	1%	Phase Cut
Lutron	DVELV-303P	100%	8%	Phase Cut
Lutron	FAELV-500	100%	12%	Phase Cut
Lutron	MAELV-600	100%	7%	Phase Cut
Lutron	SELV-300P	100%	8%	Phase Cut
Lutron	TGCL-153P	100%	1%	Phase Cut

TESTED DIMMER COMPATIBILITY LIST - 230V*

Phase cut dimming (leading edge or trailing edge**)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
BerKer	283010	100%	7.7%	Phase Cut
Busch-Jaeger	6523U	100%	0.0%	Phase Cut
CLIPSAL	32E450LM	100%	4.5%	Phase Cut
CLIPSAL	32E450TM	100%	1.7%	Phase Cut
CLIPSAL	32E450UDM	100%	2.5%	Phase Cut
ELKO	315GLE	100%	0.2%	Phase Cut
ELKO	316GLED	100%	9.1%	Phase Cut
Finder	15.91.8	100%	2.9%	Phase Cut
Gira	117600/I01	100%	4.4%	Phase Cut
Hager	EVN011	100%	1.1%	Phase Cut
Hager	EVN012	100%	1.1%	Phase Cut
Niko	325	100%	0.1%	Phase Cut
Schneider	40300.RC	100%	3.1%	Phase Cut

Some dimmers require a minimum load, check specifications.


*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

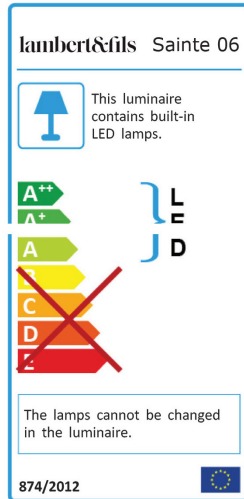

NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions