








## DOT WALL


The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

- type:** wall - softwire (SW) or hardwire (HW)
- construction:** brass or powder coated steel and brass body  
milk glass globe  
vinyl cord (SW)
- specifications:** source: LED lamp provided (G9 base)  
power consumption: 3.5W  
lumen output: 289lm  
colour temperature: 2700K included  
\* 3000K available upon request  
colour rendering index: 80 CRI standard  
\* ≥ 90 CRI upon request  
expected lifetime: ≥ 25 000h
- control:** refer to our recommended list of dimmer models (HW)
- cord length:** SW: 96" / 244 cm, hand switch at 18" / 46 cm from lamp
- weight:** min. 1.5 lb / 0.7 kg
- certifications:**     IP20
- warranty:** 2 years

### HARDWIRE

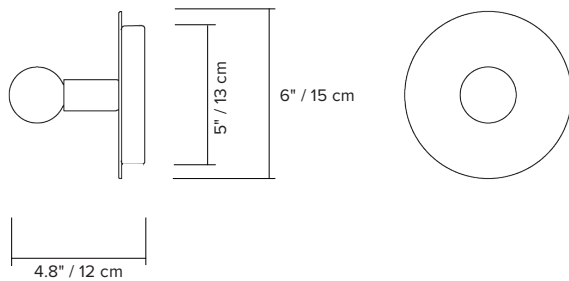

### SOFTWIRE

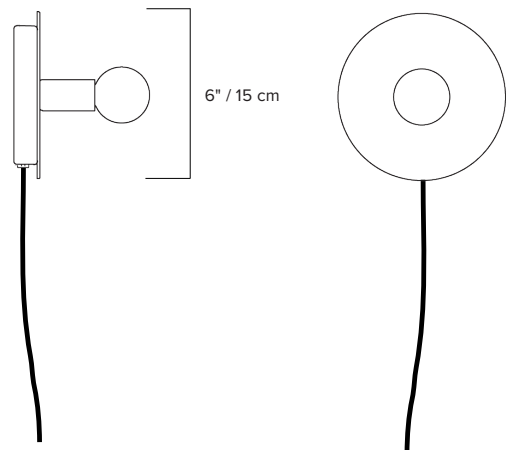

 G50  $\varnothing$  ±2" / 5 cm

## ORDER GUIDE: SKU

<u>COLLECTION</u>	<u>MODEL</u>	<u>INSTALLATION</u>	<u>FINISH</u>	<u>CORD</u>
<b>DOT</b> dot	<b>03</b>	<b>HW</b> hardwire <b>SW</b> softwire	<b>BR</b> brass <b>BK</b> black <b>WH</b> white	<b>BK</b> black <b>WH</b> white
DOT	03	HW	BR	BK = DOT03HWBRBK <i>example</i>

### FINISH



brass




flat  
black




flat  
white

### HARDWIRE



### SOFTWIRE

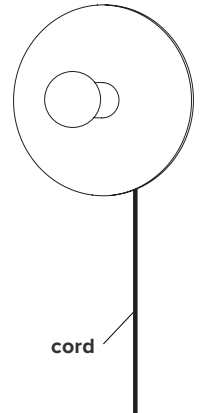

### NOTES:

- must be installed by an electrician (HW)
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

## DIMMER SPECIFICATIONS (only for HW)

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

### DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

\*Other dimmers can yield good results and we recommend conducting your own test before final installation.

## EU ENERGY LABEL

