




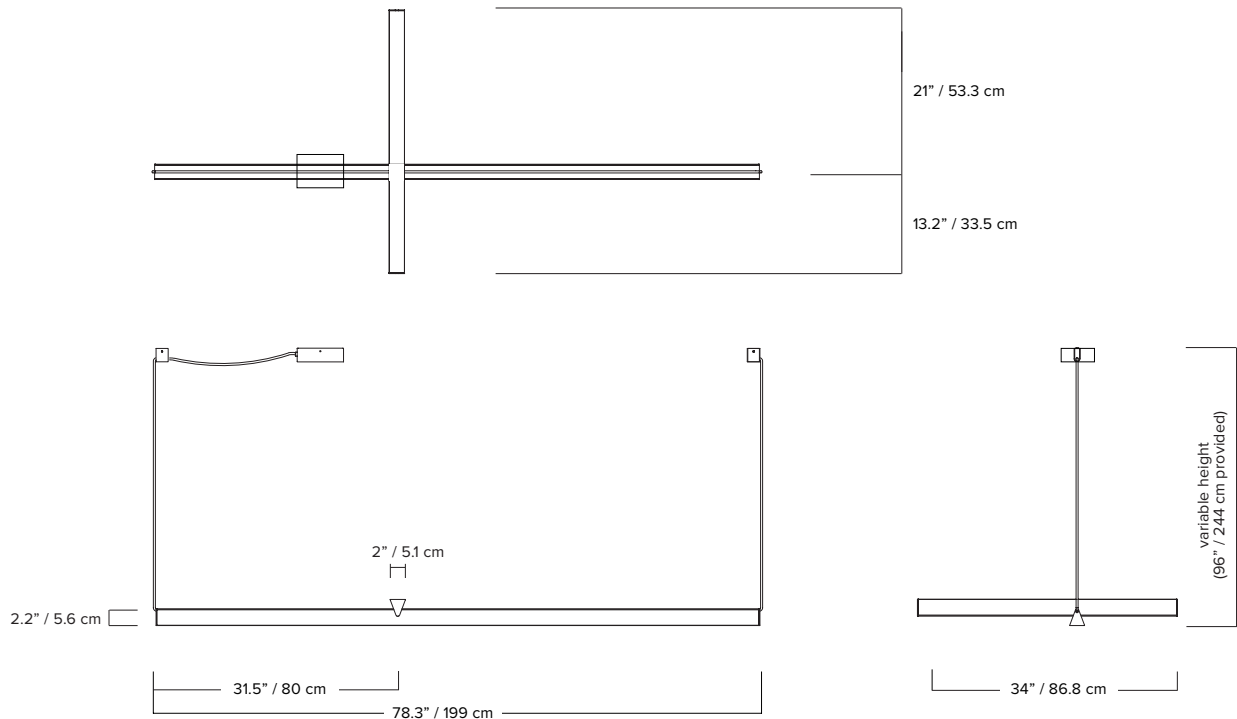


## MILE ATELIER 01

With its aluminum body, the Mile Atelier offers a mirror-like finish, reflecting the surrounding space while providing a unifying focal point. The elongated line, a vertiginous display of balance, provides a grid-like room divider that's both playful and discrete. It seems to melt into the scenery and frame it at the same time.

Mile Collection is a collaboration with designer Guillaume Sasseville.

- type:** suspension
- construction:** polished aluminum body  
polished steel anchors  
powder coated steel canopy  
frosted acrylic diffuser  
braided steel cord
- specifications:** source: LED array, integrated  
power consumption: 40W  
lumen output: LED 2700K - 3124lm  
LED 3000K - 3212lm  
light distribution: 29% Up, 71% Down  
colour rendering index: ≥90 CRI  
colour consistency: 3 SDCM  
expected lifetime: ≥50 000h
- control:** 120/277V on/off, 0-10V or phase dimming (120V only)  
220-240V: On/Off, Phase Dimming, DALI
- cord length:** mains/line cord - 120" / 304 cm  
non-electrical cord - 96" / 244 cm
- weight:** 8 lb / 3.6 kg
- certifications:**     IP20
- warranty:** 2 years




\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION		MODEL	BODY, CORD AND ANCHORS		CANOPY		COLOUR TEMPERATURE (CCT)		DIMMING	
MIL	Mile	51	AL	polished aluminum	BK	black	WL	warm light (2700K)	ZT	0-10V dimming (120V only)
					WH	white	NL	neutral light (3000K)	PH	phase dimming
							D27	dim to warm (2700K to 2200K)	DA	DALI (220-240V only)
							D30	dim to warm (3000K to 2200K)		
							CCT	other CCT available upon request*		
<b>MIL</b>		<b>51</b>	<b>AL</b>		<b>BK</b>		<b>WL</b>		<b>ZT</b>	<b>= MIL51ALBKWLZT</b>
										<b>example</b>


\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### FINISH




### NOTES

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

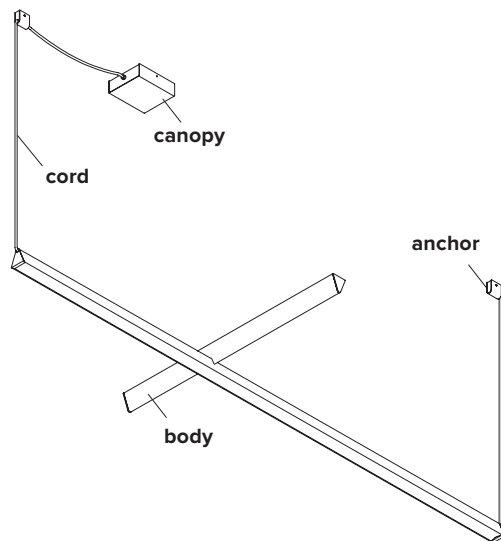

### EU ENERGY LABEL

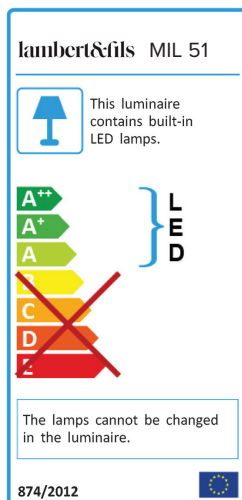

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper	DLC03P	100%	2%	Phase Cut
Cooper	SLC03P	100%	1%	Phase Cut
Leviton	IPI06-1LZ	100%	1%	Phase Cut
Leviton	VPE06	100%	10%	Phase Cut
Leviton	6631-2	100%	1%	Phase Cut
Leviton	6633-P	100%	7%	Phase Cut
Leviton	6683-IW	100%	2%	Phase Cut
Lighthouse	ZP260QEW	100%	5%	Phase Cut
Lutron	DVCL-153P	100%	2%	Phase Cut
Lutron	DVELV303P	100%	9%	Phase Cut
Lutron	DV600P	100%	3%	Phase Cut
Lutron	LG600P	100%	5%	Phase Cut
Lutron	MAELV600	100%	3%	Phase Cut
Lutron	SELV300P	100%	9%	Phase Cut
Lutron	S600P	100%	9%	Phase Cut
Lutron	S-603PG	97%	10%	Phase Cut
Lutron	TG-600P	100%	10%	Phase Cut
Lutron	TGCL-153P	100%	2%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Clipsal	32E450TM	100%	1.9%	Phase Cut
Clipsal	32E450UDM	100%	2.4%	Phase Cut
DIGINET	MEDM	100%	0.0%	Phase Cut
DIGINET	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	0.3%	Phase Cut
ELKO	316GLED	100%	2.2%	Phase Cut
GIRA	117600/I01	100%	3.4%	Phase Cut
Legrand	78401	100%	0.0%	Phase Cut
Niko	325	100%	0.0%	Phase Cut
Schneider	40300 RC	100%	2.3%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.