









# DORVAL 04



Based on CLUZEL / PLUCHON's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

<b>TYPE</b>	Wall, hardwire version
<b>CONSTRUCTION</b>	Powder coated or polished aluminum body and head Clear prismatic PMMA lens
<b>SPECIFICATIONS</b>	Source: LED array, integrated Power consumption: 5W Colour temperature: 3000K 2700K dim to warm 3000k to 2200k dim to warm 2700k to 2200k Lumen output: 3000K - 402 lm Colour rendering index: $\geq 90$ CRI Colour consistency: 3 SDCM Expected lifetime: $\geq 50\ 000$ h
<b>CONTROL</b>	120/277VAC On/Off, 0-10V or Phase Dimming (120V only) 220-240VAC On/Off, Phase Dimming, DALI Refer to our recommended list of dimmer models
<b>WEIGHT</b>	4.7lb / 2kg
<b>CERTIFICATIONS</b>	    IP20
<b>WARRANTY</b>	2 years

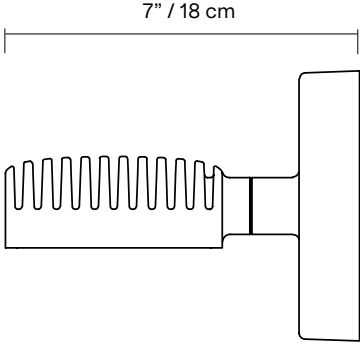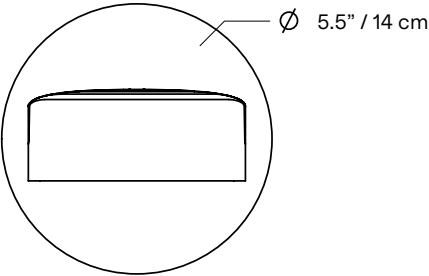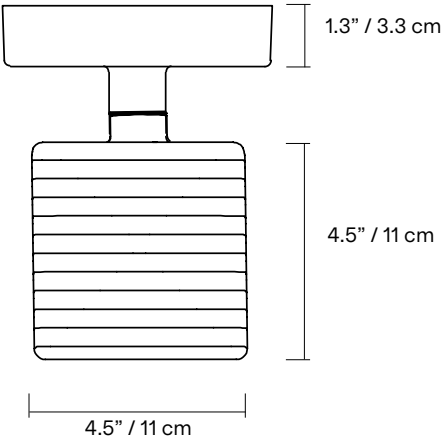

(350° rotation)

\*dimensions are approximate and may vary slightly

## FINISH



**BK**  
Textured  
black



**WH**  
Textured  
white



**MB**  
Textured  
midnight  
blue



**BG**  
Textured  
beige




**AL**  
Polished  
aluminum

## NOTES

- Must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions

## LAMP ANATOMY

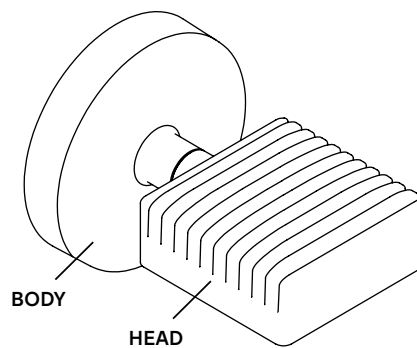

		Example	Fill with your selection
<b>COLLECTION</b>	<b>DORVAL</b> Dor	<b>DOR</b>	<b>DOR</b>
<b>MODEL</b>	<b>04</b>	<b>04</b>	<b>04</b>
<b>INSTALLATION</b>	<b>HW</b>	<b>HW</b>	<b>HW</b>
<b>FINISH</b>	<b>BK</b> Textured Black <b>WH</b> Textured White <b>MB</b> Textured Midnight Blue <b>BG</b> Textured Beige <b>AL</b> Aluminum	<b>BK</b>	
<b>COLOR TEMPERATURE (CCT)</b>	<b>F22</b> Fixed 2200K <b>F27</b> Fixed 2700K <b>F30</b> Fixed 3000K <b>D27</b> Dim to warm 2700K-2200K <b>D30</b> Dim to warm 3000K-2200K <b>CCT</b> Other CCT available upon request*	<b>F22</b>	
<b>DIMMING</b>	<b>ZT</b> 0-10V dimming <b>PH</b> Phase dimming <b>DA</b> DALI	<b>ZT</b>	
<b>FULL SKU</b>		<b>DOR04HBKF22ZT</b>	
		<b>NOTES</b>	

\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively.  
Not available with Dim-to-Warm feature.

## TOUCH DIMMER CONTROL

### GENERAL NOTES

The touch dimmer is located on the end cap of the horizontal arm.  
The luminaire is preset to dim-to-warm mode (3000K-2200K). Other options available, refer to programming section below.  
When plugging in the luminaire, wait 5 seconds before touching the sensitive end cap.

### STANDARD OPERATIONS

1 or 2 touches = Turn ON/OFF

1 constant touch when light is OFF = Light dims up from 0%

1 constant touch when light is ON = Light dims up/down alternatively

3 touches = Turn ON 100%

### PROGRAMMING

4 touches = Cycle colour temperature (CCT) value between 2200K-2700K-3000K-3500K-4000K.  
Repeat the 4 touches in between each value. Light will blink to indicate it has switched from a value to the other.

5 touches = Set to dim-to-warm mode ( 3000K to 2200K). Light will blink two times to indicate it has recorded the value.  
Repeat the 5 touches to set to dim-to-warm mode (2700K to 2200K). Light will blink two times to indicate it has recorded the value.

