


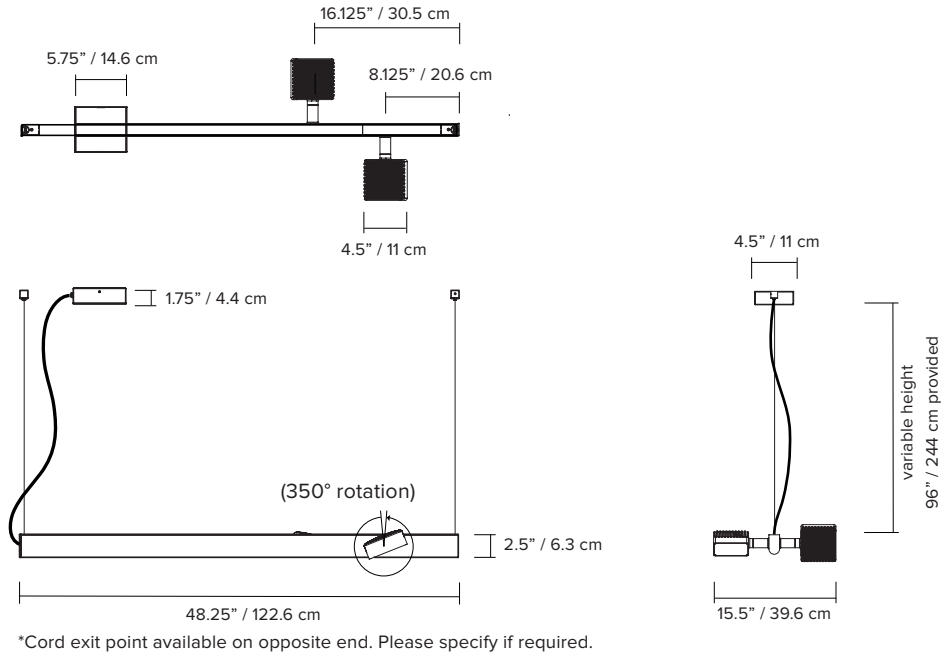


## DORVAL 05


Based on SCMP DESIGN OFFICE's original pendant prototype Dorval 01, this collection is layered in history, a subtle interplay between contemporary and vintage industrial design. Drawing equal inspiration from airport runway lights and the classic Motobecane french moped, the result is a light both confrontational and intriguing—one which poses an immediate invitation to play.

- type:** suspension
- construction:** powder coated or polished aluminum body, head and anchor  
clear prismatic PMMA lens  
polyester cord
- specifications:** source: LED array, integrated  
power consumption: refer to following pages  
lumen output: refer to following pages  
colour rendering index:  $\geq 90$  CRI  
colour consistency: 3 SDCM  
expected lifetime:  $\geq 50\ 000$ h
- control:** 120/277V on/off, 0-10V, or phase dimming (120V only)  
220-240V on/off, DALI, or phase dimming
- cord length:** 120" / 304 cm
- stainless steel cable:** 96" / 244 cm
- certifications:**     IP20
- warranty:** 2 years

## DOR05 42D




## DOR05 44D

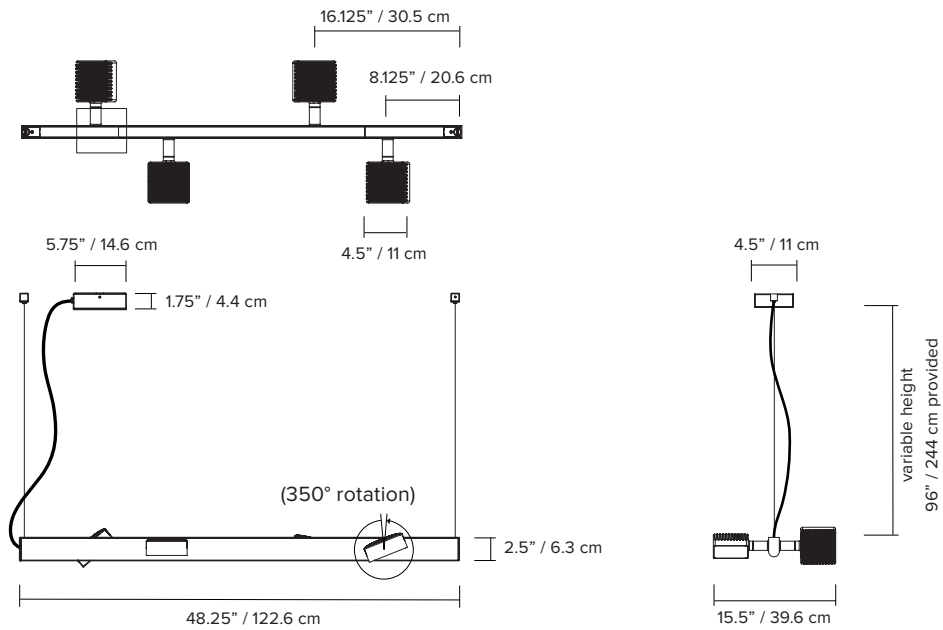


DOR05 4 feet	version	power consumption	lumen output (2700K / 3000K)	light distribution	weight
	uplight	21.2W	1463lm / 1526lm	57% down / 43% up	8.4lb / 3.8 kg
	no uplight	10.6W	836lm / 899lm	100% down	7.8lb / 3.6 kg
	uplight	29.6W	2299lm / 2425lm	73% down / 27% up	12.5lb / 5.7 kg
	no uplight	21.2W	1672lm / 1798lm	100% down	11.9lb / 5.4 kg



## DOR05 62D

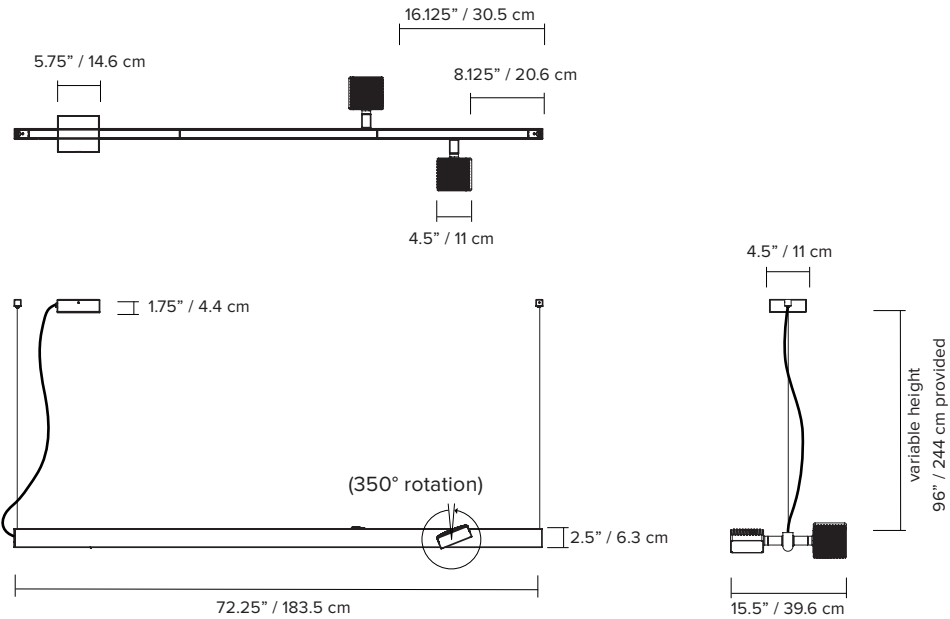


\*Cord exit point available on opposite end. Please specify if required.

## DOR05 64D

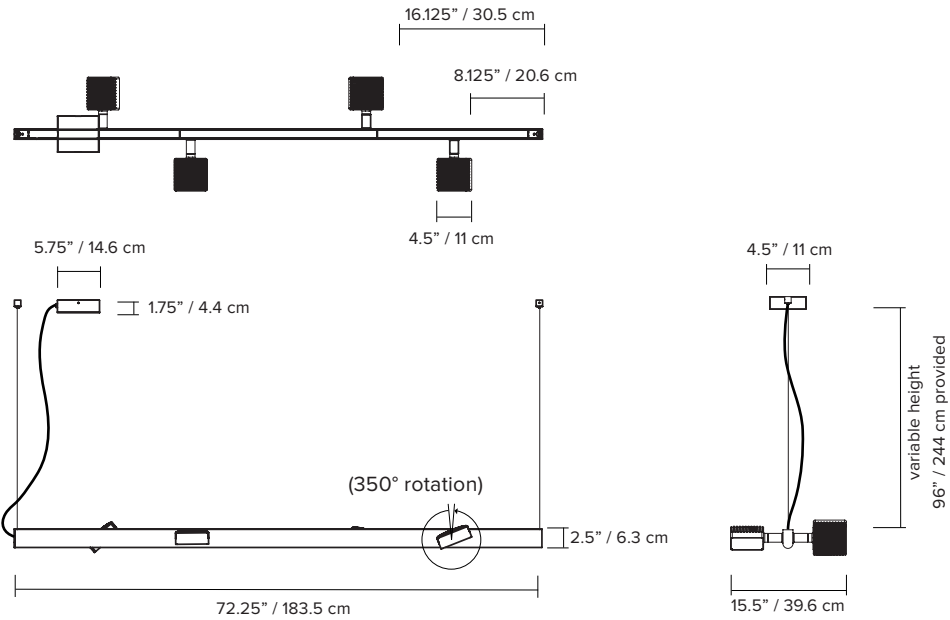


DOR05 6 feet	version	power consumption	lumen output (2700K / 3000K)	light distribution	weight
	uplight	21.2W	1463lm / 1526lm	57% down / 43% up	9.2lb / 4.2 kg
	no uplight	10.6W	836lm / 899lm	100% down	8.6lb / 3.9 kg
	uplight	29.6W	2299lm / 2425lm	73% down / 27% up	13.3lb / 6 kg
	no uplight	21.2W	1672lm / 1798lm	100% down	12.7lb / 5.8 kg

## DOR05 82D

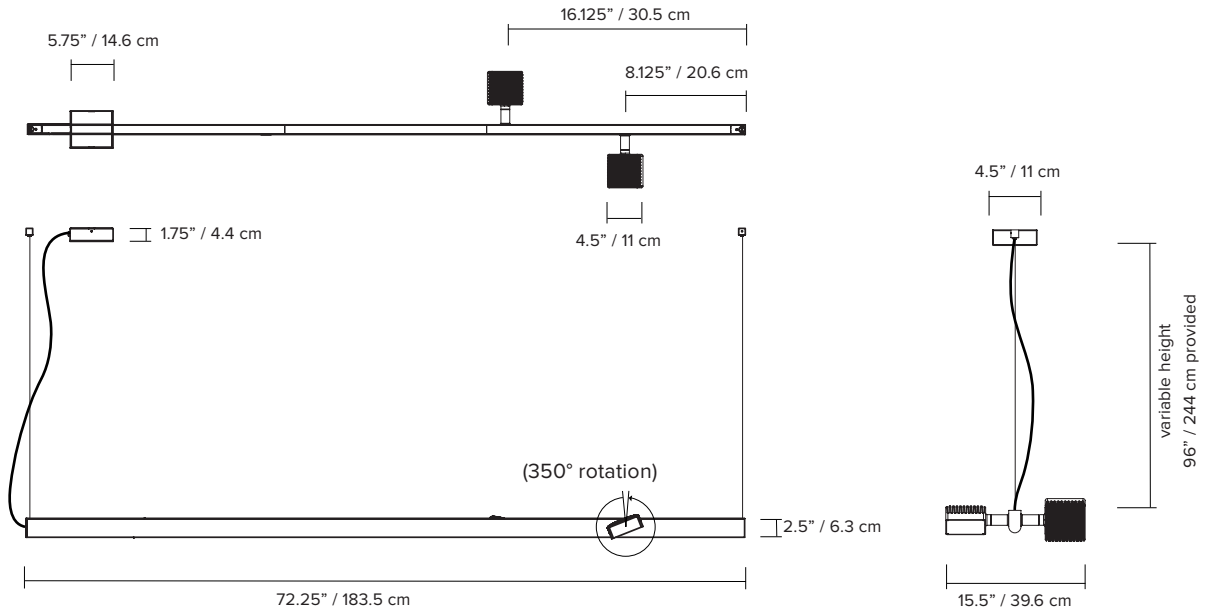

\*Cord exit point available on opposite end. Please specify if required.

## DOR05 84D

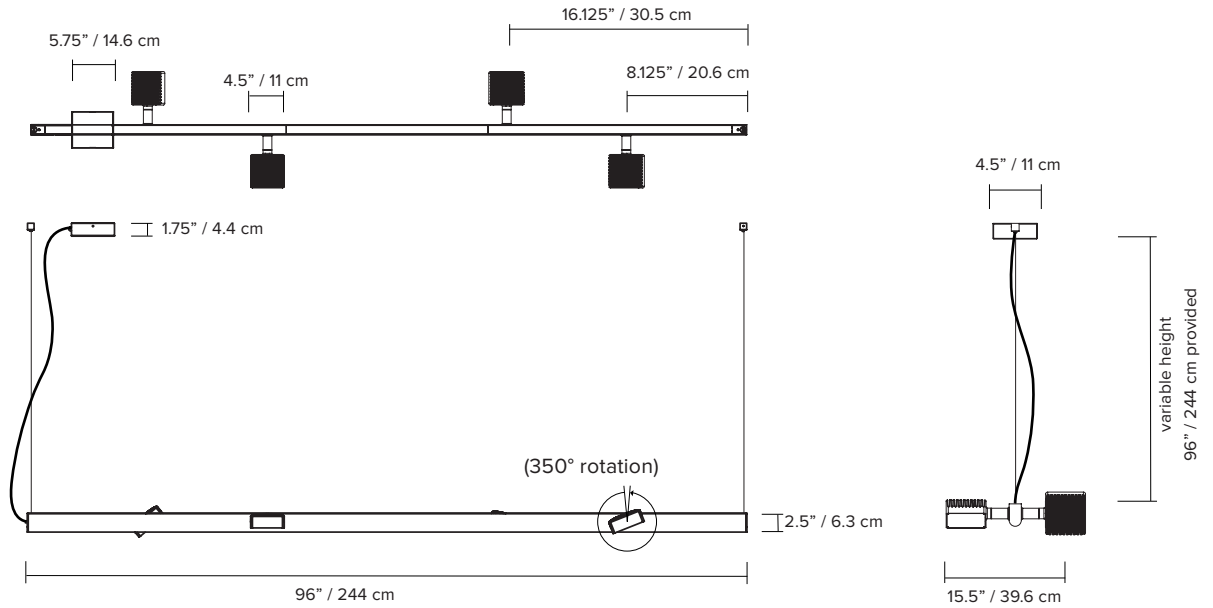

DOR05 8 feet	version	power consumption	lumen output (2700K / 3000K)	light distribution	weight
	uplight	21.2W	1463lm / 1526lm	57% down / 43% up	10lb / 4.5 kg
	no uplight	10.6W	836lm / 899lm	100% down	9.4lb / 4.3 kg
	uplight	29.6W	2299lm / 2425lm	73% down / 27% up	14.1lb / 6.4 kg
	no uplight	21.2W	1672lm / 1798lm	100% down	13.5lb / 6.1 kg

## ORDER GUIDE: SKU


COLLECTION	MODEL	LENGTH	VERSION	BODY AND CORD	CANOPY AND ANCHORS
DOR	05	4	2D	BK	BK
		6	2C	WH	WH
		8	4D	MB	MB
			4C	LB	LB
				BG	BG
				AU	AU
				AL	
DOR	05	4	2D	BK	BK

\*only available with black cord

COLOUR TEMPERATURE (CCT)	DIMMING
WL warm light (2700K)	ZT 0-10V dimming
NL neutral light (3000K)	PH phase dimming
D27 dim to warm (2700K-2200K)	DA DALI
D30 dim to warm (3000K-2200K)	
CCT other CCT available upon request *	
WL	ZT = <b>DOR0542DBKKBKWLZT</b> example



\* Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### FINISH

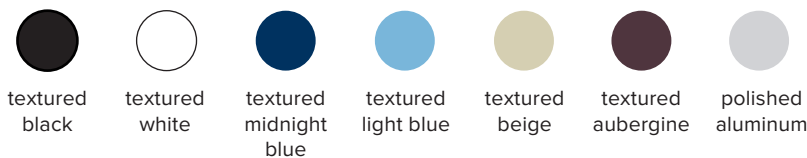

### NOTES:

- must be installed by an electrician
- ceiling anchors not meant for slanted ceilings (available upon request)
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on our website for cleaning instructions

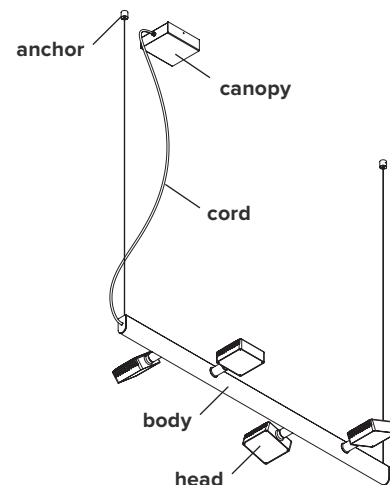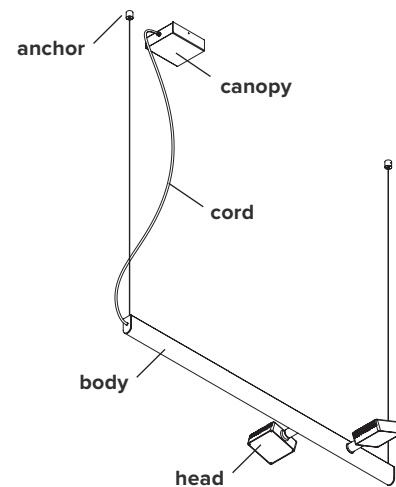

## DIMMER SPECIFICATIONS

DOR0542D, DOR562D, DOR0582D

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper/Eaton	DAL06P	100%	0%	Phase Cut
Cooper/Eaton	DLC03P	100%	1%	Phase Cut
Cooper/Eaton	SLC03P	100%	0%	Phase Cut
Leviton	IPE04-1LZ	100%	5%	Phase Cut
Leviton	IPI06-1LZ	100%	0%	Phase Cut
Leviton	VPE06-1LZ	100%	8%	Phase Cut
Lutron	DVCL-153P	100%	0%	Phase Cut
Lutron	DVELV-303P	100%	5%	Phase Cut
Lutron	FAELV-500	100%	11%	Phase Cut
Lutron	MAELV-600	100%	10%	Phase Cut
Lutron	SELV-300P	100%	6%	Phase Cut
Lutron	TGCL-153P	100%	4%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Busch-Jaeger	6523U	100%	0.1%	Phase Cut
CLIPSAL	32E450TM	100%	2.1%	Phase Cut
CLIPSAL	32E450UDM	100%	3.1%	Phase Cut
Diginet	MEDM	100%	0.0%	Phase Cut
Diginet	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	1.1%	Phase Cut
Finder	15.91.8	100%	1.3%	Phase Cut
Hager	EVN011	100%	0.7%	Phase Cut
Hager	EVN012	100%	0.8%	Phase Cut

## DIMMER SPECIFICATIONS

DOR0544C, DOR0564C, DOR0584C

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Leviton	IPE04-1LZ	100%	8%	Phase Cut
Leviton	VPE06-1LZ	100%	12%	Phase Cut
Lutron	DVELV-303P	99%	9%	Phase Cut
Lutron	SELV-300P	98%	9%	Phase Cut

## DIMMER SPECIFICATIONS

DOR0542C, DOR544D, DOR0562C, DOR0564D, DOR0582C, DOR0584D

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper/Eaton	DAL06P	100%	0%	Phase Cut
Cooper/Eaton	DLC03P	100%	4%	Phase Cut
Cooper/Eaton	SLC03P	100%	1%	Phase Cut
Leviton	IPE04-1LZ	100%	7%	Phase Cut
Leviton	IPI06-1LZ	100%	0%	Phase Cut
Leviton	VPE06-1LZ	100%	10%	Phase Cut
Lutron	DVCL-153P	100%	1%	Phase Cut
Lutron	DVELV-303P	100%	8%	Phase Cut
Lutron	FAELV-500	100%	12%	Phase Cut
Lutron	MAELV-600	100%	7%	Phase Cut
Lutron	SELV-300P	100%	8%	Phase Cut
Lutron	TGCL-153P	100%	1%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
BerKer	283010	100%	7.7%	Phase Cut
Busch-Jaeger	6523U	100%	0.0%	Phase Cut
CLIPSAL	32E450LM	100%	4.5%	Phase Cut
CLIPSAL	32E450TM	100%	1.7%	Phase Cut
CLIPSAL	32E450UDM	100%	2.5%	Phase Cut
ELKO	315GLE	100%	0.2%	Phase Cut
ELKO	316GLED	100%	9.1%	Phase Cut
Finder	15.91.8	100%	2.9%	Phase Cut
Gira	117600/I01	100%	4.4%	Phase Cut
Hager	EVN011	100%	1.1%	Phase Cut
Hager	EVN012	100%	1.1%	Phase Cut
Niko	325	100%	0.1%	Phase Cut
Schneider	40300.RC	100%	3.1%	Phase Cut

Some dimmers require a minimum load, check specifications.

\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

