




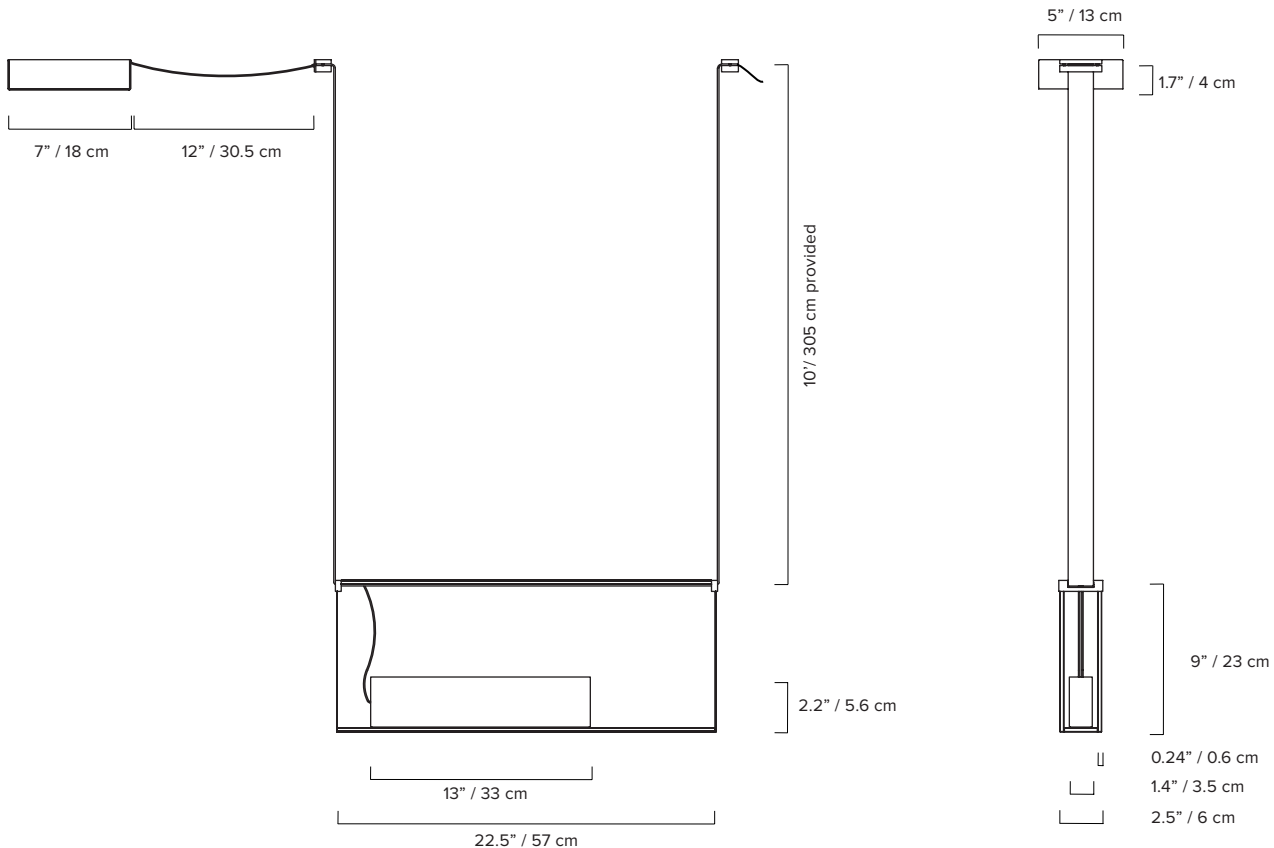


## SAINTE 25

Featuring lightweight acrylic panels, the Sainte's Classic series is destined for residential, hospitality and office interiors. Hung solo or in multiples, Sainte's tones and textures unearth ambiance and imbue a sense of intimacy. A removable aluminum lightbox rests within the translucent acrylic and can be flipped around, allowing it to cast light up or down.

Created in collaboration with Canadian designer Rachel Bussin.


- type:** suspension
- construction:** aluminum polished light block, anchor system and ceiling anchors  
polyester laminated acrylic  
nylon ribbon  
PMMA frosted diffuser
- specifications:** source: LED array, integrated  
power consumption: 11W  
colour temperature 2700K, 3000K, dim to warm.  
see order guide  
lumen output: 2700K - 499lm  
colour rendering index:  $\geq 90$  CRI  
colour consistency: 3 SDCM  
expected lifetime:  $\geq 50\ 000$ h
- control:** 120-277V: On/Off, 0-10V, Phase Dimming (120V only)  
220-240V: On/Off, Phase Dimming, DALI  
refer to our recommended list of dimmer models
- ribbon length:** 10' / 305 cm each side, width: 1.5" / 3.8 cm
- weight:** 9.6 lb / 4.4 kg
- certifications:**     IP20
- warranty:** 2 years




\*dimensions are approximate and may vary slightly

## ORDER GUIDE: SKU

COLLECTION	MODEL	COLOUR SIDE A	COLOUR SIDE B
STE sainte	25	<b>BK</b> black	<b>BK</b> black
		<b>BZ</b> bronze	<b>BZ</b> bronze
		<b>EC</b> extra clear	<b>EC</b> extra clear
		<b>FC</b> frosted extra clear	<b>FC</b> frosted extra clear
		<b>GN</b> green	<b>GN</b> green
		<b>GY</b> grey	<b>GY</b> grey
		<b>CC*</b> custom colour	<b>CC*</b> custom colour
STE	25	<b>BK</b>	<b>BK</b>

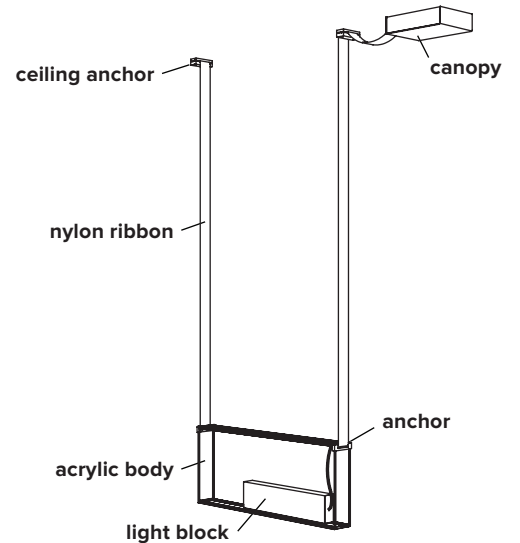

NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)	CONTROL
<b>BK</b> black	<b>BK</b> black	<b>WL</b> warm light (2700K)	<b>ZT</b> 0-10V dimming (120V only)
<b>BG</b> beige	<b>WH</b> white	<b>NL</b> neutral light (3000K)	<b>PH</b> phase dimming
		<b>D27</b> dim to warm (2700K to 2200K)	<b>DA</b> DALI (220-240V only)
		<b>D30</b> dim to warm (3000K to 2200K)	
		<b>CCT</b> Other CCT available upon request*	
<b>BK</b>	<b>BK</b>	<b>WL</b>	<b>ZT</b>




Top and bottom are always ultraclear and not available in colour.

**ZT = STE25BKBKBKWLZT**  
example


\*Specific CCT selection only available in 100K increments, from 2200K to 4000K inclusively. Not available with Dim-to-Warm feature.

### GLASS BODY


(\*Custom colours available on one or both sides upon request)

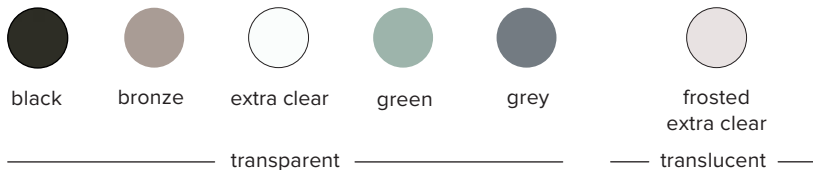

### NYLON RIBBON



### MOUNTING OPTIONS

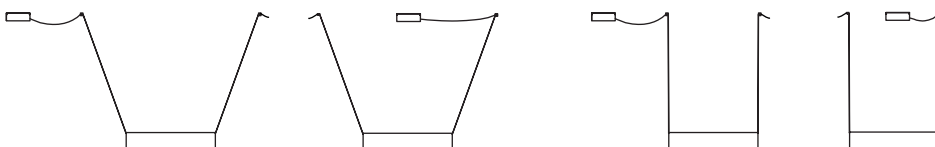

Must be installed at 20 degrees or less.

## DIMMER SPECIFICATIONS

### TESTED DIMMER COMPATIBILITY LIST - 120V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Cooper/Eaton	DAL06P	100%	0%	Phase Cut
Cooper/Eaton	DLC03P	100%	1%	Phase Cut
Cooper/Eaton	SLC03P	100%	0%	Phase Cut
Leviton	IPE04-1LZ	100%	5%	Phase Cut
Leviton	IPI06-1LZ	100%	0%	Phase Cut
Leviton	VPE06-1LZ	100%	8%	Phase Cut
Lutron	DVCL-153P	100%	0%	Phase Cut
Lutron	DVELV-303P	100%	5%	Phase Cut
Lutron	FAELV-500	100%	11%	Phase Cut
Lutron	MAELV-600	100%	10%	Phase Cut
Lutron	SELV-300P	100%	6%	Phase Cut
Lutron	TGCL-153P	100%	4%	Phase Cut

### TESTED DIMMER COMPATIBILITY LIST - 230V\*

Phase cut dimming (leading edge or trailing edge\*\*)

Dimmer brand	Model	Max level	Min level	Dimming Protocol
Busch-Jaeger	6523U	100%	0.1%	Phase Cut
CLIPSAL	32E450TM	100%	2.1%	Phase Cut
CLIPSAL	32E450UDM	100%	3.1%	Phase Cut
Dignet	MEDM	100%	0.0%	Phase Cut
Dignet	MMDM/PB	100%	0.0%	Phase Cut
ELKO	315GLE	100%	1.1%	Phase Cut
Finder	15.91.8	100%	1.3%	Phase Cut
Hager	EVN011	100%	0.7%	Phase Cut
Hager	EVN012	100%	0.8%	Phase Cut

Some dimmers require a minimum load, check specifications.


\*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

\*\*Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.

## EU ENERGY LABEL

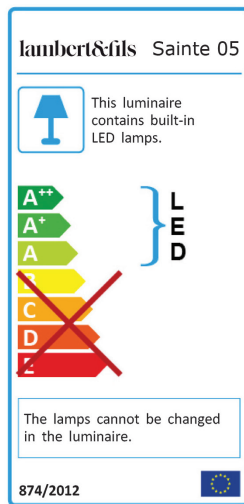

### NOTES:

- must be installed by an electrician
- LED may only be changed by Lambert & Fils or other authorized personnel
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions